

19" Slimline Disk Installation Instructions

IMPORTANT SAFETY INSTRUCTIONS

Instructions pertaining to a risk of fire, electric shock or injury to people.

CONSIGNES DE SÉCURITÉ IMPORTANTES

Instructions relatives à un risque d'incendie, de choc électrique ou de blessures aux personnes.

WARNING!


Installation must be done according to local electrical codes.

Installation should be done by a certified electrician.

AVERTISSEMENT!

L'installation doit être effectuée conformément aux codes électriques locaux.

L'installation doit être effectuée par un électricien certifié.

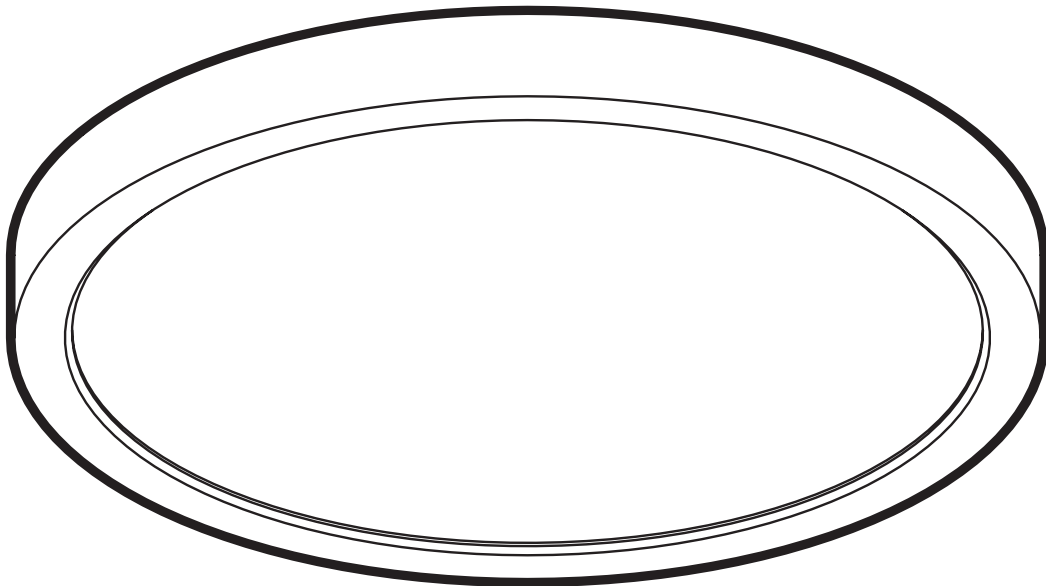

Integrated driver is dimmable with most regular dimmers (Low voltage electronic dimmer suggested)

For best dimmability see compatible dimmer list.

Dimming range up to: 1%-100%

Le pilote intégré est dimmable avec la plupart des gradateurs réguliers (gradateur électronique basse tension suggéré)

Pour une meilleure gradabilité, consultez la liste des gradateurs compatibles.

Plage de gradation jusqu'à: 1% à 100%

Slimline Disk Installation Instructions

Instructions before installation / Instructions avant l'installation

⚠ WARNING - BEFORE STARTING INSTALLATION SHUT THE LINE FEED POWER OFF USING THE CIRCUIT BREAKER
⚠ AVERTISSEMENT - AVANT DE COMMENCER L'INSTALLATION, COUPEZ L'ALIMENTATION LIGNE À L'AIDE DU DISJONCTEUR

Installation Instructions / Instructions d'installation

1

After installation

Hold Mounting Bracket up to junction box with flange facing down. Align breach side of the Mounting Bracket parallel to nearest wall. Screws mounting bracket to j-box.

2

Before working wire connections, attach to hook side of safety cable on mounting bracket.

3

With the power turned off.
 Connect the green ground wire from the fixture to the bare copper groundwire from the junction box using a wirenut (If house wiring does not include a ground wire, consult it your local electrical code for approved grounding methods) Use Wirenuts to connect black fixture wire to the black power supply wire and white fixture wire to the white power supply wire.

4

Attach provided to indents (opening) of the Mounting Bracket and align mounting tabs on back of the fixture with indents in the Mounting Bracket.

5

Using sticker on the fixture(reference point for mounting tab)and on the ceiling as reference point, lift fixture up to the ceiling and rotate clockwise until fixture is secured (45-degree turn until it locks).