




## INSTALLATION INSTRUCTIONS FOR CUSP DISK LIGHTS



**Thoroughly inspect the fixture for freight damage.  
Freight damage should be reported to the delivery carrier**

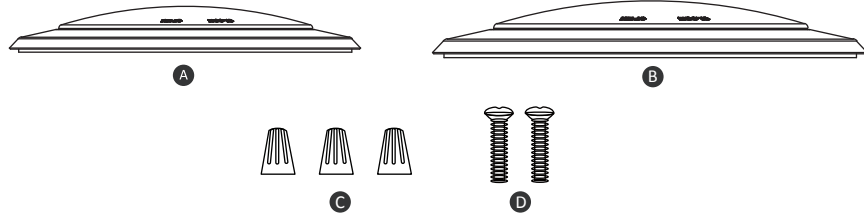



PLEASE READ AND UNDERSTAND THIS ENTIRE MANUAL BEFORE ATTEMPTING TO ASSEMBLE, OPERATE OR INSTALL THE PRODUCT.

### Warning:

- Please read carefully and save these instruction, as you may need them at a later date.  
When using electrical equipment, basic safety precautions should always be followed as below:  
**READ AND FOLLOW BELOW SAFETY INSTRUCTIONS**  
GENERAL: All electrical connections must be in accordance with local and National Electrical Code (N.E.C) standards. If you are unfamiliar with connections obtain the services of a qualified electrician.
- Risk of fire or electric shock.
  - Disconnect main power at fuse or circuit breaker before installing or servicing the fixture.
  - Do not make or alter any open holes in an enclosure of wiring or electrical components during kit Installation.
  - To prevent wiring damage or abrasion do not expose wiring to edges of sheet metal or other sharp objects.
  - This device is not intended for use with emergency exit.
  - This fixture is 5%-100% dimmable. Please refer to a compatible dimmer list.
  - Suitable for Wet Locations.
  - To prevent electrical shock, please wear rubber shoes and work gloves when installing the fixture.


## INSTALLATION STEPS

1. Make sure power off and the Junction Box is securely mounted before installation. (4" disk light is compatible with 4" Junction Box (hole spacing 3.5"), 6" disk light is compatible with 3" Junction Box (hole spacing 2.75") or 4" Junction Box (hole spacing 3.5"), see Fig 1.




2. Remove lens by twisting counter clockwise, see Fig. 2

3. Select lamp color desired with the 5-CCT switch at the front of the disk light, see Fig. 3





4. Connect the supply wires to the wires of disk light by using 3 wire nuts. Attach white to white, black to black, green to the ground wire, see Fig 4.



5. Arrange the wires into the Junction Box. Align appropriate slots in the disk light with the holes in the Junction Box. Use 2 screws to attach the disk light, flush with the ceiling, see Fig 5.

6. Placing the lens back into it's original position by twisting it in clockwise direction, see Fig 6.



7. Seal the edge of the fixture and the lens by using the waterproof sealant, see Fig 7.