




LED Linear Architectural Installation Instructions

LED-ALIN2-1FT-3P12-D-5CCT-WH LED-ALIN2-2FT-3P25-D-5CCT-WH LED-ALIN2-4FT-3P50-D-5CCT-WH LED-ALIN2-6FT-3P75-D-5CCT-WH






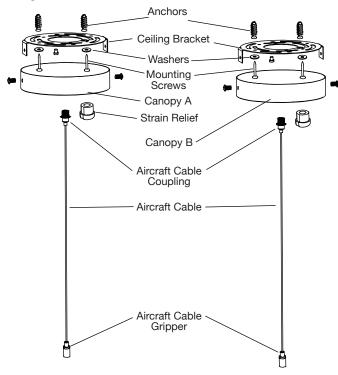





Install hanging plates and grounding wire

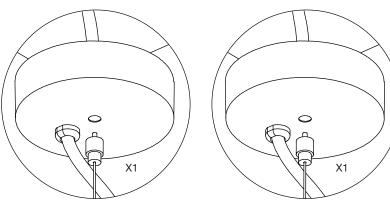







Install the suspension screw









Step 2 Step 3 Step 1




Attach Lamp Bodies




Pull the mask off with a suction cup




Remove the screw




Pull the end cover out




End cover removed




Insert the connector into the lamp body




Lock the screws

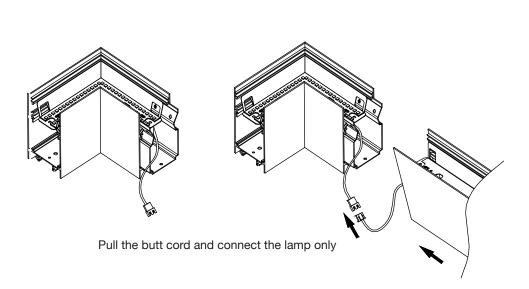






Aluminum Frame Embedded inside out



Dimensions	2ft.	4ft.	6ft.	8ft.	
L	24.5"	48"	72"	95"	
W	3.25"				




Install the border strip








Kit: M4*8 Round head dovetail screw


2ft: 8PCS. 4ft: 10PCS. 6ft: 12PCS. 8ft: 14PCS



















Batch Gray Embedding




assist	
Kit: M4*25 Countersunk Cross Self-Tapping Screw	
0	2ft: 6PCS. 4ft: 8PCS. 6ft: 12PCS.
Kit: Ø4*12 Shim	8ft: 16PCS.
Kit: Expansion Glue Nail	


Dimensions	2ft.	4ft.	6ft.	8ft.	
L	24.5"	48"	72"	95"	
W	3.25"				





Install a batch of gray strips







M4*8 Round head dovetail screw


2ft: 10PCS. 3ft: 10PCS. 4ft: 12PCS. 6ft: 16PCS. 8ft: 20PCS.

Adjusting screw after inserting into ceiling




Aluminum Frame Embedded outside in

Adjusting screw after inserting into ceiling

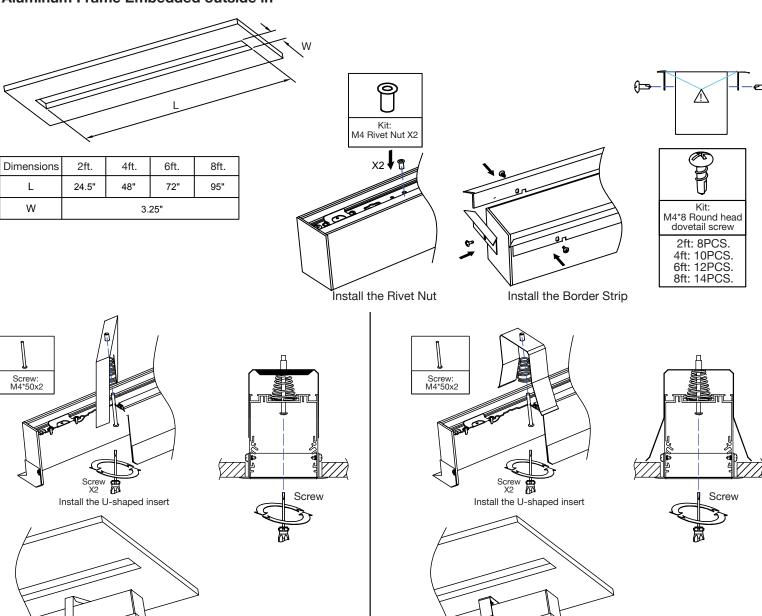



Wall Mount Installation

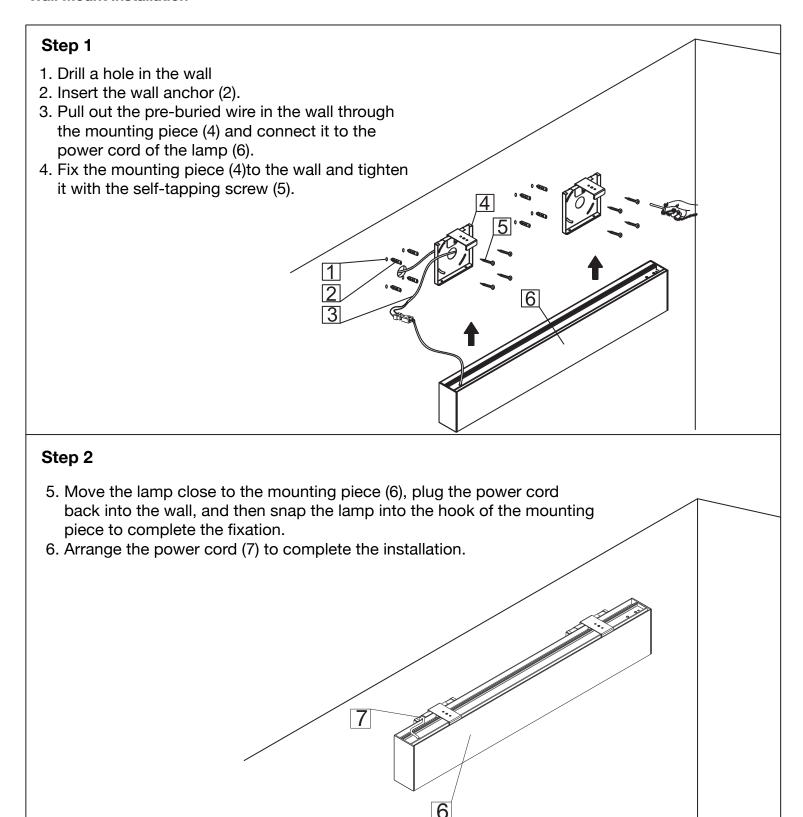


CAUTION: Please note that DO NOT use this product in the following places/application

- 1. The place has a large quantity of lamp black and smoke, such as: kitchen and food processing factory.
- 2. The place has a large quantity of chemical corrosive substance, such as: chemical plant and stockyard etc.
- 3. The place has poor temperature conditions, large-scale temperature variation, which would easily lead to broken and damage the product, the applicable operating temperature is between 59° & 113°




Wall Mount Placements


2FT



4FT

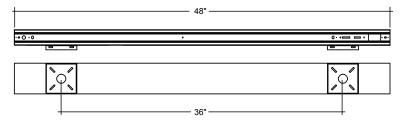

6FT

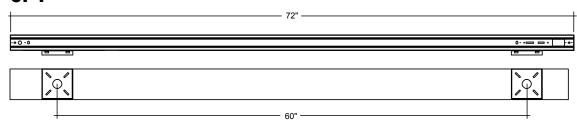

8FT

