

Full-Cutoff Wall Pack: FC-Line

3-CCT + 5-Power Selectable

Wall Packs



Detail Specifications:

- Finish: Bronze, Black, White, Custom finishes available
- IP Rating: Wet Location
- Impact Rating: IK08
- Beam Angle: Type III (Standard), II, IV available
- Chip: SMD 2835, R9 >50, CRI >80
- BUG: B3-U2-G2
- Operating Temperature: -40° - 122° F
- Lens: Clear acrylic with optics
- Average life (L70) of 70,000 hours

Applications:

- Walkways & Pathways
- Parking Lots
- Hospitality, Multi-Family
- Outdoor Corridors
- Residential, Commercial and Industrial

Product Information:

- Sturdy die-cast aluminum housing finished with corrosion free powder coat
- Full Cut-Off Dark Sky Compliant
- Photocell is included with an easy quick disconnect
- Instant-On to full brightness
- Select-n-Switch Technology: 3-CCT + 5-Power Selectable
- Control Options:
 - Standard Sensors
 - SILVAIR Bluetooth Mesh
 - ENVISIONLS Bluetooth
 - [Click Here](#) for More Information

Driver Options:

- UNV: 120-277V 0-10V Dimmable
- HV: 277-480V 0-10V Dimmable
- Built in 6Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

Mounting & Installation:

- Five 1/2" knockouts: 1 one each side for convenient installation

Certifications:

- UL Listed for USA and CA
- DLC Premium Listed
 - 5P80: PLK6KOZFX70
 - 5P150: PLBQM8B8ISJS
- ROHS Compliant
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

WATT	LUMENS
16	2,320
30	4,350
32	4,640
48	6,960
60	8,700
64	9,280
80	11,600
90	13,050
120	17,400
150	21,750

QUICK SHIP HEAD OPTIONS

Series	Finish ¹	Voltage	Photocell	Optic	Sensor ²	Emergency	Surge Protector
LED-WPFC-5P80-TRI 16/32/48/64/80W • 30/40/50k	BZ Bronze	(blank) 120-277V	PC Photocell is included. Easy quick disconnect.	(Blank) Type III	(Blank) No Sensor	(Blank) No Emergency	(Blank) 6KV
LED-WPFC-5P150-TRI 30/60/90/120/150W • 30/40/50K	(Standard) BL Black	HV 277-480V	(PC-3/4-3PIN-LV)	T2 Type II	BMS Bi-Level Motion + Daylight Sensor	EMB Emergency	Built-In 20KV
	WH White			T4 Type IV	Remote Required: (S-LINE-R)	Backup	Surge Protector
	GRY¹ Gray				BMS-BT PIR ENVISIONLS Bluetooth Control	CEMB 90 Minute	
	CS¹ Custom Color				BMS-SL PIR SILVAIR Bluetooth Mesh	Backup Cold Weather 4-120F	

1. Standard quickship models shows on page 3.

2. Sensors require remote for programming

Specs and model numbers are subject to change with or without notice



Full-Cutoff Wall Pack: FC-Line

3-CCT + 5-Power Selectable



FEATURES



DIMENSIONS

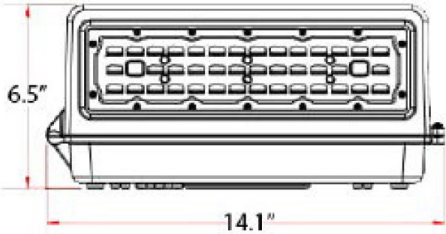


5P80

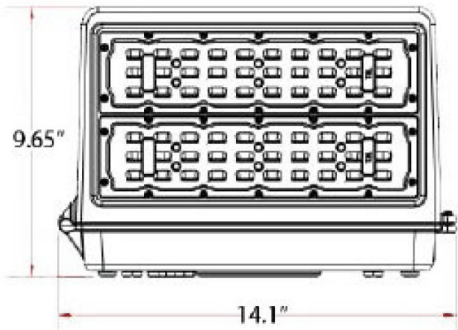

5P150

Full-Cutoff Wall Pack: FC-Line

3-CCT + 5-Power Selectable



T2
T4

STANDARD QUICK SHIP MODELS

Model	Voltage	Watts	Lumens	Color	CRI
LED-WPFC-5P80-TRI-BZ-PC	120-277V	16/32/48/64/80w	145 lm/w	30/40/50k	>80
LED-WPFC-5P80-TRI-BL-PC	120-277V	16/32/48/64/80w	145 lm/w	30/40/50k	>80
LED-WPFC-5P80-TRI-WH-PC	120-277V	16/32/48/64/80w	145 lm/w	30/40/50k	>80
LED-WPFC-5P80-TRI-BZ-HV-PC	277-480V	16/32/48/64/80w	145 lm/w	30/40/50k	>80
LED-WPFC-5P150-TRI-BZ-PC	120-277V	30/60/90/120/150w	145 lm/w	30/40/50k	>80
LED-WPFC-5P150-TRI-BL-PC	120-277V	30/60/90/120/150w	145 lm/w	30/40/50k	>80
LED-WPFC-5P150-TRI-WH-PC	120-277V	30/60/90/120/150w	145 lm/w	30/40/50k	>80

Pre-Installed Accessory Model	Description
Add '-BMS' to model #	S-BMS-EXT-1: Bi level motion + daylight sensor
Add '-BMS-BT' to model #	S-BMS-EXT-1-BT: Bi level motion + daylight sensor W/ bluetooth control (EnvisioNLS App)
Add: -BMS-SIL to Model #	SILVAIR Enable Bluetooth Control: PIR/Daylight/Zoning/Monitoring

OPTIC LENS

Accessory Model	Description
WPFC-T-II	Type II
WPFC-T-IV	Type IV

Control Options

EnVision LED offers 3 control systems compatible with our LED Fixtures for projects of all sizes and budgets.

	Basic Controls	EnVisionLS 	EnVisionLED.x SILVAIR 
Description	Standard Plug In Sensors	Basic Bluetooth Wireless Control	Advanced Bluetooth Wireless Control
Recommended Quantity (but not limited to)	N/A	>40-50 Nodes	>50 Nodes
Maximum Zone Quantity	N/A	100	3,000
Commissioning Tool	Remote Only	  ENVISIONLS App 	  SILVAIR App 
Commissioning Process	Individually Set via Remote	Wireless Must be done on site	Wireless- Initial linking must be done on site. Commissioning can be done via desktop remotely.
Floor Plan Upload	N/A	N/A	Yes Add a floor plan and mark luminaires & zones via desktop
Gateway	N/A	N/A	Required only for energy monitoring, advanced scheduling, automated demand response.
Individual Luminaire Control	Yes	Yes	Yes
Luminaire Grouping Zoning	N/A	Yes	Yes
High End Power Low End Power	Yes but limited (View Remote)	Yes	Yes
Cost	\$	\$\$	\$\$\$
DLC NLC Listed	N/A	Yes	Yes
Energy Monitoring & Data Reporting	N/A	N/A	Monitor energy usage per individual zone & retrofit cost savings calculation + detailed reporting



Compatible Products:

EnVision offers a variety of nodes, sensors, & gateways that are controlled via remote, ENVISIONLS Bluetooth Mesh & SILVAIR Bluetooth Mesh on all of our 0-10V dimmable fixtures.



Individual Fixture Controls: PIR Sensor, Bi-Level Dimming, Daylight

Basic Note: **-1** • ENVISIONLS Models Note: **-BT** • SILVAIR Models Note: **-SL**

	MODEL #	DESIGN	RECOMMENDED FIXTURE	FEATURES
	S-TWC-PIR-1 S-TWC-PIR-BT S-TWC-PIR-SL	Twist-C Control Sensor	Sensor Ready Fixtures: Area Lights, Canopies, Flood Lights, High Bays	All models are equipped with PIR occupancy sensing, high & low end bi-level dimming, & daylight sensing.
	S-TWC-90 + S-TWC-PIR-1 S-TWC-90 + S-TWC-PIR-BT S-TWC-90 + S-TWC-PIR-SL	Twist-C Control Sensor + 90 Degree Arm	Cylinders, Strips, Wall Packs	
	S-AUD-PIR-1 S-AUD-PIR-BT S-AUD-PIR-SL	2.5m Audio Jack	Panels & Troffers	
	S-SN-PIR-1 S-SN-PIR-BT S-SN-PIR-SL	Snap In Sensor	Troffers & Wraps	

Group Controls ENVISIONLS Models Note : **-BT** • SILVAIR Models Note: **-SL**

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	S-CM-PIR-LV-BT S-CM-PIR-LV-SL	Ceiling Mounted PIR Sensor	12-24V	PIR Sensor, Bi-Level Dimming, Daylight, 360° detection, 12' Max Mounting Height	Connects to 0-10V dimmable fixtures
	S-WM-PIR-CUNV-BT S-WM-PIR-CUNV-SL	Wall Mounted PIR Occupancy Sensor, Bi-Level Dimming, Daylight	120-277V	On/Off PIR occupancy sensor, 180° detection, 30' detection @ 4' Mounting Height	Connects to LED fixtures
	S-WS-120V-USB-SL		120V	Dimming Wall Socket, Two Sockets	Floor Lamps, Other Lamps

Gateway (Silvair Only) 4.5–5.5 V DC, 2A Power over Ethernet 36–57 V DC

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	SGW-102	Wall or Ceiling Mounted	POE	Advanced Energy Monitoring Control	Connects to Silvair Controls. Gateway is not required.