

6" Regressed Downlight: SnapTrim-Line

5-CCT Selectable



Detail Specification:

- Finish: White, Black, Custom
- Wet Location Rated
- Beam Angle: 38°
- Chip: COB Chip, R9 >50, CRI >90
- 3 Step MacAdam Ellipses
- Operating Temperature: -40° - 114° F
- Lens: Clear COB
- Average life (L70) of 50,000 hours

Applications:

- General Recessed Lighting
- Residential & Multifamily
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality

Product Information:

- 5-CCT Selectable: 27/30/35/40/50K
- Various sizes, finishes, and trims available
- Standard white round trim included: optional trims available
- Metal housing and trim for better heat dissipation
- Optional emergency backup available: delivers full lumens in EM mode up to 25W
- SnapTrim Canless: Spring clips with remote j-box eliminates can

Driver Options:

- 120V Triac Dimmable
- Built in 2.5Kv Surge Protector
- Flicker Free

Mounting & Installation:

- Cut Out Dimensions
 - Round: 5-3/4"
 - Square: 6-1/4"
- Optional new construction plate available
- This fixture does not fit into a recessed can
- No can needed in remodel applications, tension clips mount into 1/2" to 1.5" thick ceiling
- Can be removed from below the ceiling for service or replacement
- Pre-wired junction box with circuit wiring built in (3 in/ 3 out)

Certifications:

- ETL Listed for USA and CA
- Energy Star Certified
- CA Title 24 JA8-2022 CEC Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017
- IC Rated and ASTM-E283 Air-Tight

Series	Beam Angle	Emergency
LED-DLJBX-6RG-24W-5CCT-WH-R	(Blank)	(Blank)
1,800LM White Round	38° Degree	No
	24D	Emergency
	24° Degree	Backup
	60D	EMB
	60° Degree	Emergency Backup

Optional Accessories (Order Separately)

Trims	New Construction Plates	Extension Cables	Emergency Backup ¹ (field install)	Goof Ring	Optics
DLJBX-6RG-TRIM-WH-SQ White Square	CUNV-NC-ICAT-7H Universal Plate with Hanging Bars	JBX-EXT-6'-2PIN 6' Extension	LED-EMB-25W-HV -0/10V-2P Up to 24W fixtures	GR-6-WH 6.3-10" Width	OPTIC-90X25 -24D 24 Degree Field Install Lens
DLJBX-6RG-TRIM-BLK-R Black Round	C6-JBX-RI 6" Rough in plate	JBX-EXT-10'-2PIN 10' Extension			OPTIC-90X25 -60D 60 Degree Field Install Lens
DLJBX-6RG-TRIM-BLK-SQ Black Square	CUNV-JBX-RI-XL Universal Rough In Plate Extra Long	JBX-EXT-12'-2PIN 12' Extension			

1. Field installable. Lasts 90 minutes.







6" Regressed Downlight: SnapTrim-Line

5-CCT Selectable

FEATURES



DIMENSIONS

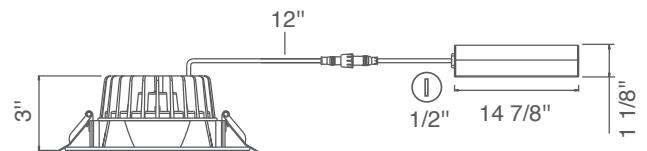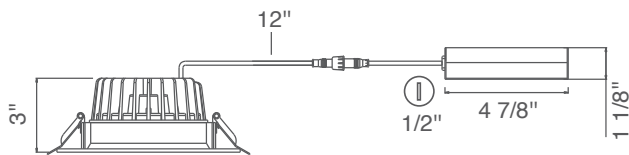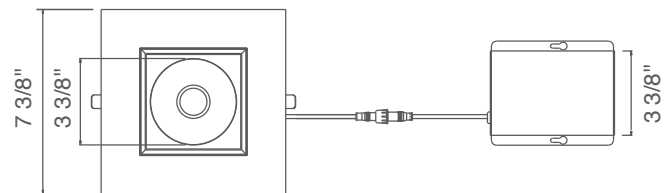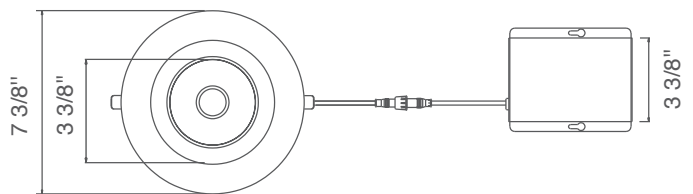






6" Round Trim

6" Square Trim

6" Regressed Downlight: SnapTrim-Line

5-CCT Selectable

ACCESSORIES

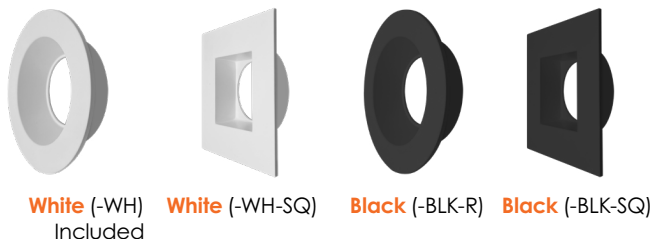

Model	Voltage	Watts	Lumens	Color	CRI
LED-DLJBX-6RG-24W-5CCT-WH-R	120V	24w	1800	27/30/35/40/50K	>90

TRIMS

Accessory	Description
DLJBX-6RG-TRIM-WH-SQ	6" Regressed Gimbal White Square Trim
DLJBX-6RG-TRIM-BLK-R	6" Regressed Gimbal Black Round Trim
DLJBX-6RG-TRIM-BLK-SQ	6" Regressed Gimbal Black Square Trim

CONSTRUCTION PLATES

Accessory	Description
CUNV-NC-ICAT-7H	1" 2" 3" 3.5" 4" 5" 6" Universal Pre-Mounting New Construction Plate
C6-JBX-RI	6" Rough In Plate
CUNV-JBX-RI-XL	Universal tough in plate (Extra Long)

EXTENSION CABLE

Accessory	Description
JBX-EXT-6'-2PIN	6" Extension Cable
JBX-EXT-10'-2PIN	10" Extension Cable
JBX-EXT-12'-2PIN	12" Extension Cable

BATTERY BACK-UP

Accessory	Description
LED-EMB-25W-HV-0/10V-2P	Up to 24W fixtures

OPTICS

Accessory	Description
OPTIC-90X25-24D	24 Degree Field Install Lens
OPTIC-90X25-60D	60 Degree Field Install Lens

GOOF RING

Accessory	Description
GR-6-WH	6.3-10" Width

TESTED COMPATIBLE DIMMERS

Other dimmers may be compatible but have not been tested. Please contact us for more information.

TRIAC/ELV Dimmers

Lutron	Leviton	Legrand	Cooper
AYCL-153P	6633	ADTP703TU	9540
DV-600PR	6674	H703PTW	DAL06P
DVCL-153P	6602		
MACL-153MH	IPL06		
MRF2-6CL			
D-600P			
NTELV-300P			
S-600P			
CT-600P			
CTCL-153P			
TG-600P			
TCCL-153P			

0-10V Dimmers

Lutron	Leviton	Wattstopper	Lightolier
DVTV	Illumitech - IP7	DCLV1	ZP600FAM120
NFTV			SR1200ZTUNV
NFTV			