Project:	Part #:
Type:	

Canless Downlights

EcoValue 4" & 6" Round Retrofit Downlights

















Detail Specifications:

- Finish: White Smooth Standard
- · Black, Bronze, Brushed Nickel (Smooth & Baffle options)
- Wet Location Rated
- 5-CCT Selectable: 27/30/35/40/50K
- · Beam Angle: 100°
- Chip: SMD 2835, R9 >50, CRI >90
- Operating Temperature: -40° 114° F
- Lens: Frosted acrylic, non-yellowing
 Average life (L70) of 30,000 hours

Applications:

- · General Recessed Lighting
- Residential & Multifamily
- · Office and Meeting Rooms
- · Education, Healthcare, Retail, Hospitality

Product Information:

- Fixture includes orange led quick connect and E26 base adapter
- · Ideal for use in both remodel and new construction applications
- · Metal housing and trim for better heat dissipation
- Select-n-Switch Technology: 5-CCT Selectable

Driver Options:

- 120V Triac Dimmable down to 5%
- Built in 2.5Kv Surge Protector
- AC Technology

Mounting & Installation:

- 4": Tension clip springs fit into most 4" compatible recessed cans
- 6": Springs clips fit into most 5 &6" compatible recessed cans
- · Retrofit into existing housing with E26 socket
- · Can be removed from below the ceiling for service or replacement

Certifications:

- ETL Listed for USA and CA
- Energy Star Certified
- CA Title 24 JA8-2022 CEC Listed
- · Meets LM-79 & LM-80 Standards
- FCC CFR 47, GCC Part 15, Subpart B:2017
- IC Rated and ASTM-E283 Air-Tight
- 3 Year Limited Warranty

Series

15W • 1,200Lm

ECV-RDL-4-10W-5CCT-WH-SM 10W • 800Lm ECV-RDL-5/6-15W-5CCT-WH-SM Optional Accessories (Order Separately)

Black Smooth

Bronze Smooth

Black Baffle

Bronze Baffle

Custom Color

RDL-TRIM-4-BZ-SM

RDL-TRIM-4-BN-SM

RDL-TRIM-4-WH-BFL

RDL-TRIM-4-BZ-BFL

RDL-TRIM-4-BN-BFL

Brushed Nickel Baffle

Brushed Nickel Smooth

4" Trim Options

6" Trim Options

Black Smooth RDL-TRIM-5/6-BZ-SM Bronze Smooth

RDL-TRIM-5/6-BN-SM **Brushed Nickel Smooth** RDL-TRIM-5/6-WH-BFL

RDL-TRIM-4-BLK-BFL RDL-TRIM-5/6-BLK-BFL

Black Baffle

RDL-TRIM-5/6-BZ-BFL Bronze Baffle

RDL-TRIM-5/6-BN-BFL Brushed Nickel Baffle RDL-TRIM-4-CUSTOM RDL-TRIM-5/6-CUSTOM

Custom Color

Housing & Cans

RDL-TRIM-4-BLK-SM RDL-TRIM-5/6-BLK-SM C4-NC-ICAT-LED 4" IC Rated Can:

> 4" IC Rated Can: Retrofit

C6-NC-ICAT-LED 6" IC Rated Can: New Construction C6-RM-ICAT-LED

6" IC Rated Can: Retrofit

Fire Rated Housings & Cans

C4-NC-ICAT-LED-FR 4" IC Rated Can: New Construction
C4-RM-ICAT-LED C6-NC-ICAT-LED-FR

6" IC Rated Can: **New Construction**


1. Field installable. Lasts 90 minutes.


Specs and model numbers are subject to change with or without notice. Customization of product is available.

FEATURES



DIMENSIONS



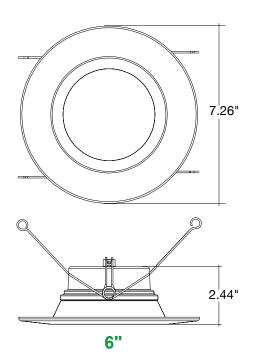

EcoValue 4" & 6" Round Retrofit Downlights 5-CCT Selectable

ACCESSORIES





TRIM-BN-BFL RDL-4-TRIM-BN-BFL RDL-5/6-TRIM-BN-BFL



TRIM-BZ-BFL RDL-4-TRIM-BZ-BFL RDL-5/6-TRIM-BZ-BFL





TRIM-BLK-BFL RDL-4-TRIM-BLK-BFL RDL-5/6-TRIM-BLK-BFL



TRIM-WH-BFL RDL-4-TRIM-WH-BFL RDL-5/6-TRIM-WH-BFL







C4-NC-ICAT-LED C6-NC-ICAT-LED



Model	Voltage	Watts	Lumens	Color	CRI
ECV-RDL-4-10W-5CCT-WH-SM	120V	10w	800lm	27/30/35/40/50K	>90
ECV-RDL-5/6-15W-5CCT-WH-SM	120V	15w	1,200lm	27/30/35/40/50K	>90

TRIMS

Accessory Model	Description
RDL-TRIM-4-BLK-SM	4" Black Trim Smooth
RDL-TRIM-4-BZ-SM	4" Bronze Trim Smooth
RDL-TRIM-4-BN-SM	4" Brushed Nickel Trim Smooth
RDL-TRIM-4-WH-BFL	4" White Trim Baffle
RDL-TRIM-4-BLK-BFL	4" Black Trim Baffle
RDL-TRIM-4-BZ-BFL	4" Bronze Trim Baffle
RDL-TRIM-4-BN-BFL	4" Brushed Nickel Trim Baffle
RDL-TRIM-4-CUSTOM	4" Custom Trim
RDL-TRIM-5/6-BLK-SM	5/6" Black Trim Smooth
RDL-TRIM-5/6-BZ-SM	5/6" Bronze Trim Smooth
RDL-TRIM-5/6-BN-SM	5/6" Brushed Nickel Trim Smooth
RDL-TRIM-5/6-WH-BFL	5/6" White Trim Baffle
RDL-TRIM-5/6-BLK-BFL	5/6" Black Trim Baffle
RDL-TRIM-5/6-BRZ-BFL	5/6" Bronze Trim Baffle
RDL-TRIM-5/6-BN-BFL	5/6" Brushed Nickel Trim Baffle
RDL-TRIM-5/6-CUSTOM	5/6" Custom Trim

HOUSING & CANS

Model	Voltage	Description
C4-NC-ICAT-LED	120-277V	4" IC Rated Can (New Construction)
C4-RM-ICAT-LED	120-277V	4" IC Rated Can (Remodel)
C6-NC-ICAT-LED	120-277V	6" IC Rated Can (New Construction)
C6-RM-ICAT-LED	120-277V	6" IC Rated Can (Remodel)

FIRE RATED HOUSING & CANS

Model	Voltage	Description
C4-NC-ICAT-LED-FR	120-277V	4" Fire Rated IC Can (New Construction)
C6-NC-ICAT-LED-FR	120-277V	6" Fire Rated IC Can (New Construction)

TESTED COMPATIBLE DIMMERS

Other dimmers may be compatible but have not been tested. Please contact us for more information.

Lutron	Leviton
TG-600PR-WH	6672
S-600PR-WH	6674
CTCL-153PDH-WH	DSL06
SLV-600P-AL	PD-6WCL
DV-600PR-WH	MACL-153M//MA-R
SCL-153PH-WH	