Low Voltage: Round Flood Lights
Solid Brass – Architectural Models

ETL Listed
Intertek

ORB

MBL

Spike
Included

Detail Specifications:
• Finish: Oil Rubbed Bronze or Matte Black
• Housing: Corrosion Resistant Solid Brass
• Lamp Type:
  - G4 Bulbs 12V (not included)
  - 35W Halogen Max
  - LED bulbs available
• IP Rating: Wet Location IP65
• Lens: Clear glass

Applications:
• Landscape
• Walkways & Pathways
• Security Lighting
• Hospitality, Multi-Family
• Outdoor Corridors
• General Outdoor Lighting
• Residential, Commercial

Product Information:
• Heat resistant glass lens
• Fully adjustable knuckle for precise control
• Water tight silicone ring for waterproofing
• Packaging: Retail color box
• Master box quantity: 10pcs.

Driver Options:
• Compatible with 12V Low Voltage Drivers

Mounting & Installations:
• Wire: 6' (72") SPT-1W 18 gauge wire lead
• Bracket: Adjustable 180° bracket
• Spike: 8" Non-metallic spike included
  - Optional brass spike available

Warranty:
• Lifetime Anti-Corrosion Warranty

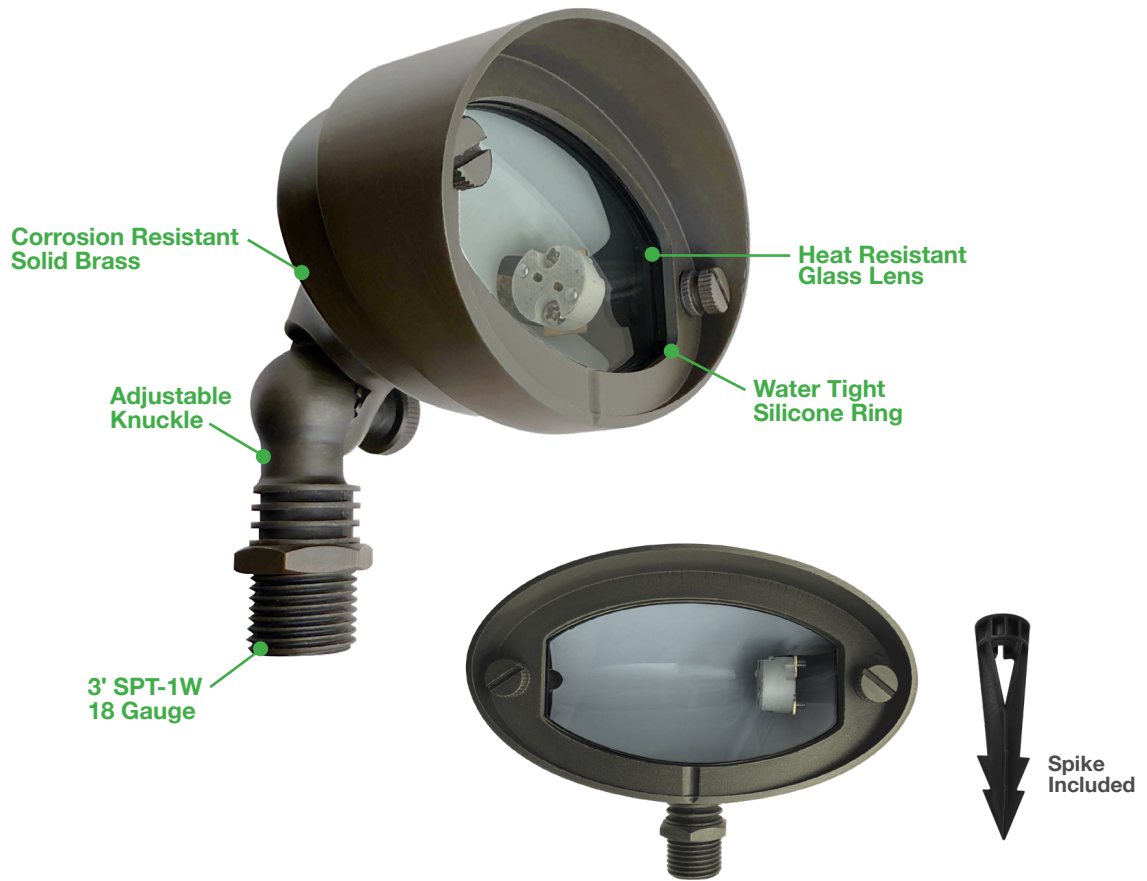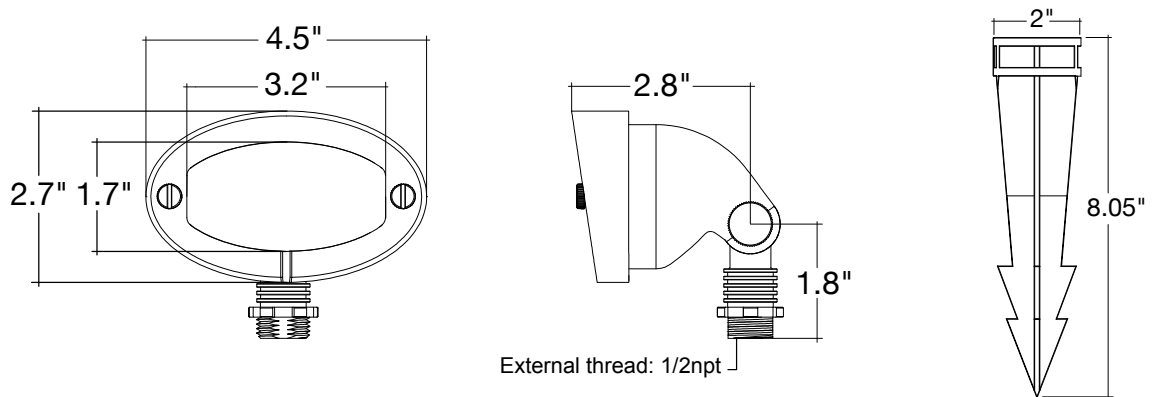| Models	1 Bulb Option (Not Included)
FL-SM-RD-BR-ORB-12V Oil Rubbed Bronze	**LED-G4WP-1.5W-SW** 110lm • 2700K
FL-SM-RD-BR-MBL-12V Matte Black	**LED-G4WP-1.5W-WW** 110lm • 3000K
	LED-G4WP-1.5W-CW 110lm • 4000K
	LED-G4WP-2.5W-SW 210lm • 2700K
	LED-G4WP-2.5W-WW 210lm • 3000K
	LED-G4WP-2.5W-CW 210lm • 4000K
	LED-G4WP-3.5W-SW 280lm • 2700K
	LED-G4WP-3.5W-WW 280lm • 3000K
	LED-G4WP-3.5W-CW 280lm • 4000K

Optional Accessories on Page 3

Specs and model numbers are subject to change with or without notice. Customization of product is available.

FEATURES

Corrosion Resistant Solid Brass

Heat Resistant Glass Lens

Adjustable Knuckle

Water Tight Silicone Ring

3' SPT-1W 18 Gauge

Spike Included

DIMENSIONS

4.5"

3.2"

2.7" 1.7"

2.8"

1.8"

External thread: 1/2npt

2"

8.05"

ACCESSORIES

LED-G4WP-1.5W-SW
LED-G4WP-1.5W-WW
LED-G4WP-1.5W-CW

LED-G4WP-2.5W-SW
LED-G4WP-2.5W-WW
LED-G4WP-2.5W-CW

LED-G4WP-3.5W-SW
LED-G4WP-3.5W-WW
LED-G4WP-3.5W-CW

STK-HD-1/2-BR

SM-1/2-BR-ORB

SM-1/2-BR-MBL

SM-1/2-ALM-BZ

SM-1/2-ALM-BL

SM3-1/2-BR-ORB

SM3-1/2-BR-MBL

STKC-1/2-BR-ORB

STKC-1/2-BR-MBL

GM-1/2-BR-SS

GM-1/2-ALM-BZ

GM-1/2-ALM-BL

Model	Voltage	Finish	Bulb
FL-SM-RD-BR-ORB-12V	12V	Oil Rubbed Bronze	LED-G4
FL-SM-RD-BR-MBL-12V	12V	Matte Black	LED-G4

BULBS

Model	Voltage	Watts	Lumens	Color
LED-G4WP-1.5W-SW	12V AC/DC	1.5w	110	2700k
LED-G4WP-1.5W-WW	12V AC/DC	1.5w	110	3000k
LED-G4WP-1.5W-CW	12V AC/DC	1.5w	110	4000k
LED-G4WP-2.5W-SW	12V AC/DC	2.5w	210	2700k
LED-G4WP-2.5W-WW	12V AC/DC	2.5w	210	3000k
LED-G4WP-2.5W-CW	12V AC/DC	2.5w	210	4000k
LED-G4WP-3.5W-SW	12V AC/DC	3.5w	280	2700k
LED-G4WP-3.5W-WW	12V AC/DC	3.5w	280	3000k
LED-G4WP-3.5W-CW	12V AC/DC	3.5w	280	4000k

STAKE

Model	Voltage
STK-HD-1/2-BR	Brass Stake 10'' Heavy Duty

SURFACE MOUNT

Model	Description
SM-1/2-BR-ORB	Brass Stake 10'' Heavy Duty (Oil Rubber Bronze)
SM-1/2-BR-MBL	Brass 1/2'' Surface Mount (Matte Black)
SM-1/2-ALM-BZ	Aluminum 1/2'' Surface Mount (Bronze)
SM-1/2-ALM-BL	Aluminum 1/2'' Surface Mount (Black)

TREE MOUNT

Model	Description
SM3-1/2-BR-ORB	Brass Stake 10'' Heavy Duty (Oil Rubber Bronze)
SM3-1/2-BR-MBL	Brass 1/2'' Surface Mount (Matte Black)

STAKE COVER

Model	Description
STKC-1/2-BR-ORB	Brass Stake Cover(Oil Rubbed Bronze)
STKC-1/2-BR-MBL	Brass Stake Cover(Matte Black)

GUTTER MOUNT

Model	Description
GM-1/2-BR-SS	Brass Gutter Mount (Stainless Steel)
GM-1/2-ALM-BZ	Aluminum Gutter Mount (Bronze)
GM-1/2-ALM-BL	Aluminum Gutter Mount (Black)