



Detachable Motion Sensor



Features:

- 5.8GHz microwave motion sensor with dimmable function
- Suitable for tri-proof light
- Tri-level control by 1-10V output
- Detachable version flexible installation
- Remote control
- 5 year warranty



ON/OFF CONTROL



DETECTION AREA



HOLD TIME



DAYLIGHT THRESHOLD



STAND-BY PERIOD



STAND-BY DIMMING



REMOTE CONTROL SETTINGS

TECHNICAL DATA

Operating voltage	120-277 VAC 50/60Hz
Switching capacity	Max.3.0A@120Vac,Max.2.0A@277Vac
Stand-by power	<1W
Detection area	50%/100%
Hold time	5s/30s/1min/10min
Daylight threshold	2Lux/10Lux/50Lux/Disable
Stand-by period	0s/30s/20min/+∞
Stand-by dimming level	10%/20%/30%/50%
Microwave frequency	5.8GHz ± 75MHz
Microwave power	<0.3mW
Interfaces	6-pole pluggable clamp terminal (L,N,N,L',1-10v+,1-10v-) for 0.75- 1.5mm ² cable
Mounting height	Max.6m(ceiling mounted);Max.3m(wall mounted)
Detection range	Max.ø14m(ceiling mounted);Max.10m(wall mounted)
Detection angle	30°-150°
Operating temperature	-20°C~+60°C
IP rating	IP20

Series

HD407V-CR
1W • 120-277V


Optional Accessories (Order Separately)

Remote Options


HD03R
HD05R

Detachable Motion Sensor

FEATURES

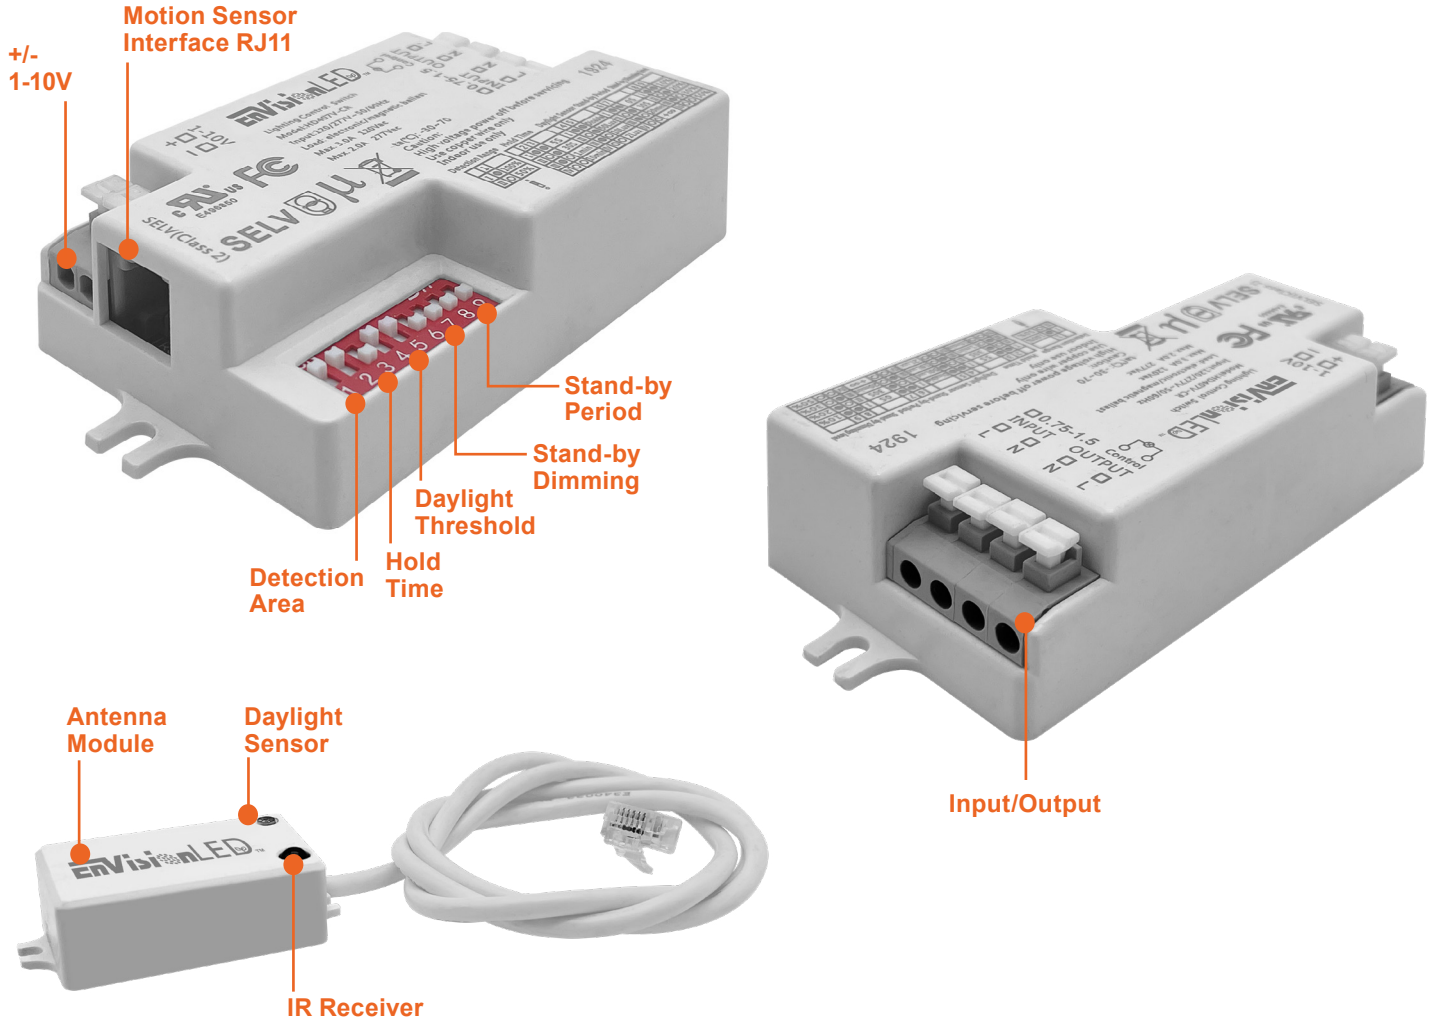

DIMENSIONS

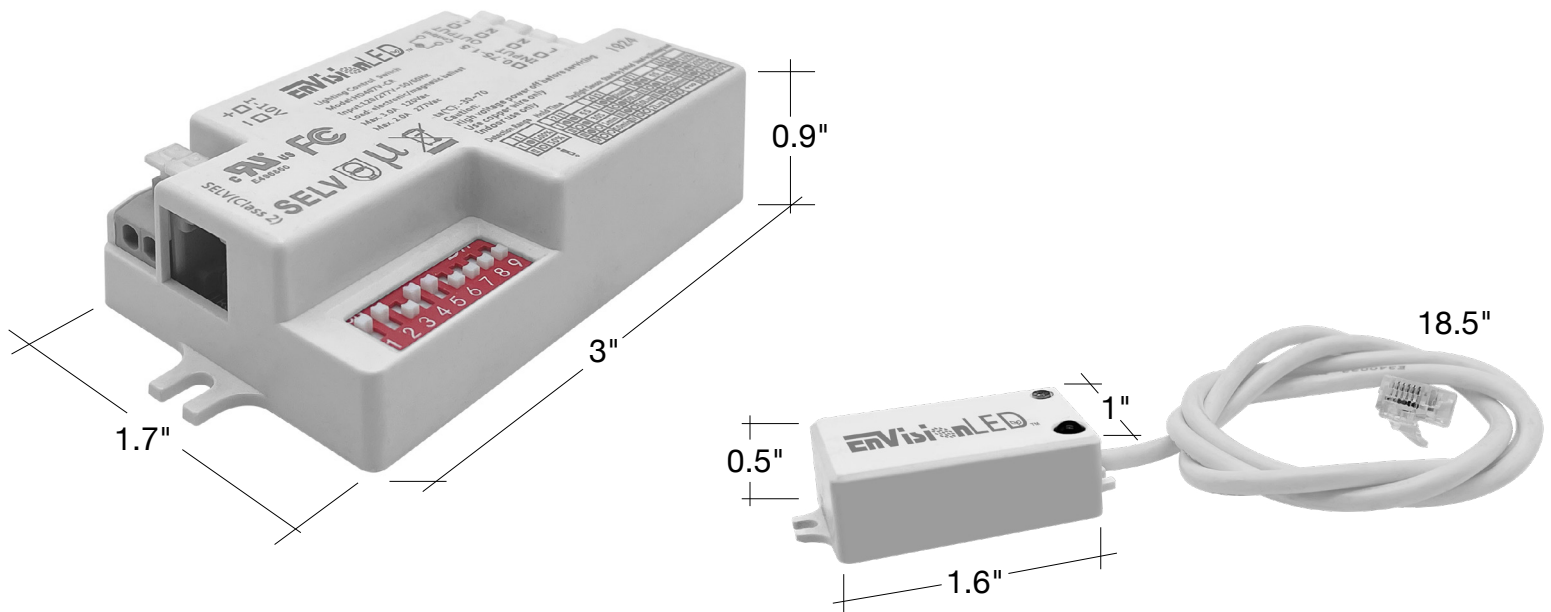

Detachable Motion Sensor

ACCESSORIES



HD03R



HD05R

H-Line Sensors

Model	Item Description	Voltage	Watts
HD03R	Remote for HD Sensors	120-277V	<1w
HD05R	Remote for HD Sensors w/ S screen	120-277V	<1w