



M-Line: Mini Area Lights

3-CCT & Power Selectable w/ Photocell



KN-Knuckle



TR-Trunion

WATT	LUMENS
15	2,100
30	4,200
35	4,900
50	7,000
60	8,400
70	9,800
80	11,200

Detail Specifications:

- Finish: Bronze, White, Custom finishes available
- IP Rating: Wet Location
- Beam Angle: 120°
- 15, 30W: Non-Dimmable
- 50, 80W: Dimmable
- CCT: 30/40/50K Selectable
- Chip: SMD 2835, R9 >50, CRI >80
- 3 Step MacAdam Ellipses
- Operating Temperature: -40° - 122° F
- Lens: PC Lens: Clear acrylic with optics
- Average life (L70) of 70,000 hours

Applications:

- Dock and Loading
- Walkways & Pathways
- Parking Lots
- Hospitality, Multi-Family
- Outdoor Corridors
- General Outdoor Lighting
- Residential, Commercial and Industrial

Product Information:

- Sturdy die-cast aluminum housing finished with corrosion free powder coat
- Photocell included on each fixture. Easy disconnect.
- 1.5' STJW 18.3 AWG cable whip included
- Select-n-Switch Technology
- Instant-On to full brightness

Driver Options:

- UNV: 120-277V 0-10V Dimmable
- Built in 6Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

Mounting & Installation:

- Two standard arms:
 - 1/2" Knuckle Mount
 - Trunion Mount
- Adjustable 180° arms

Certifications:

- UL Listed for USA and CA
- DLC Premium Listed
- ROHS Compliant
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series	Finish ¹	Bracket	Photocell
LED-ARL-2P30-TRI 15/30W • 2,100/ 4,200Lm	BZ Bronze	KN 1/2" Knuckle	(blank) No
LED-ARL-2P50-TRI 35/50W • 4,900/ 7,000Lm	WH White	TR Trunion	PC Photocell
LED-ARL-3P80-TRI 60/70/80W 8,400/9,800/11,200Lm	BL ¹ Black GRY ¹ Gray CS ¹ Custom Color		PC Button Photocell


1. Standard quickship is bronze and white. Other colors are custom finishes.

Specs and model numbers are subject to change with or without notice.



M-Line: Mini Area Lights

3-CCT & Power Selectable w/ Photocell

FEATURES

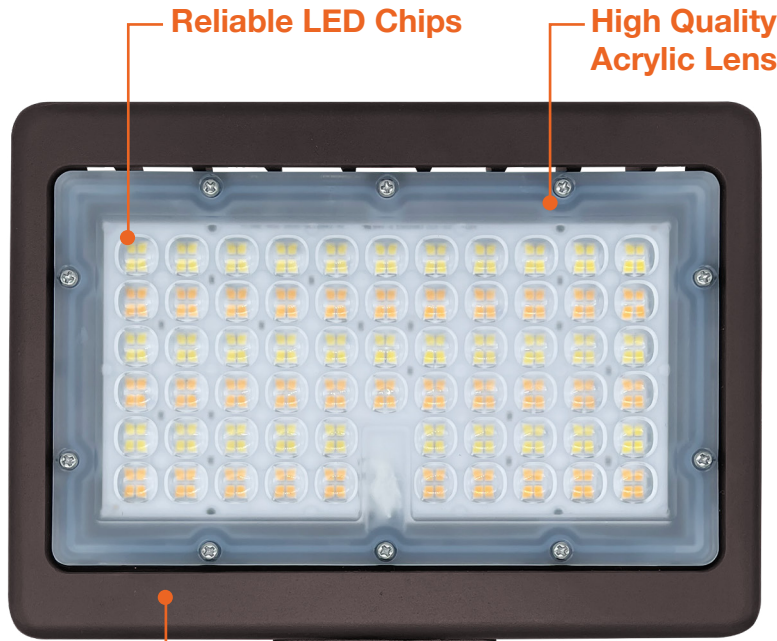


Aluminum Die-Cast

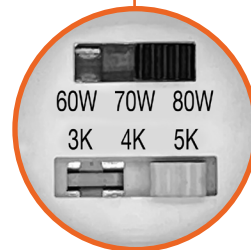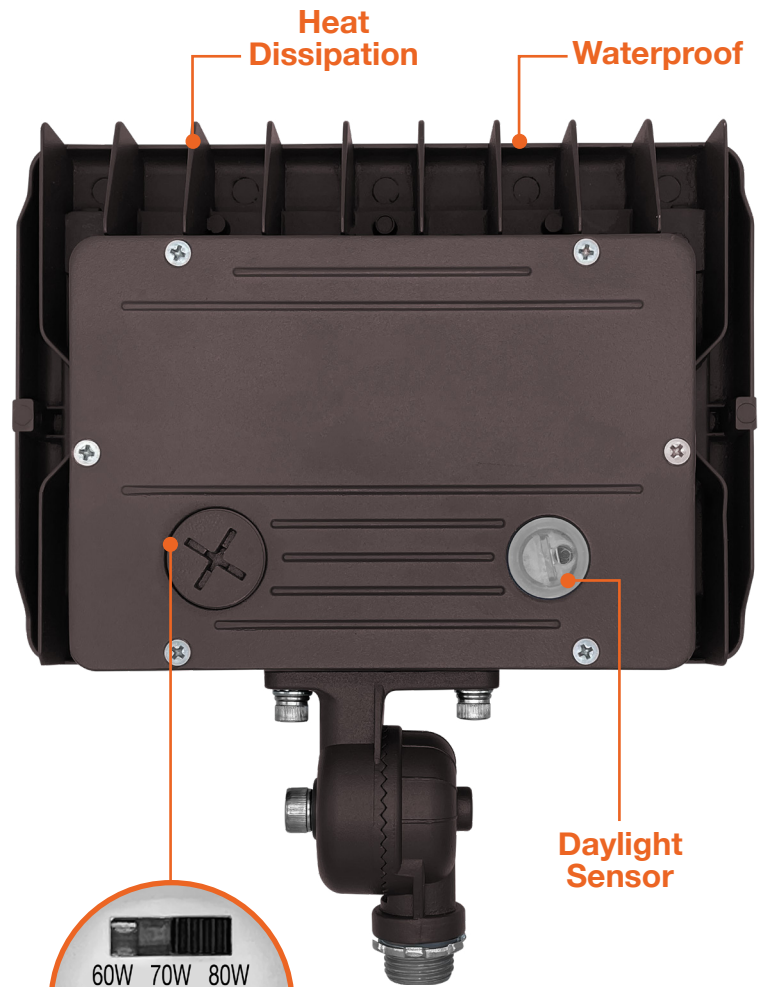


Power Select
3-CCT Selectable

M-Line: Mini Area Lights


3-CCT & Power Selectable w/ Photocell

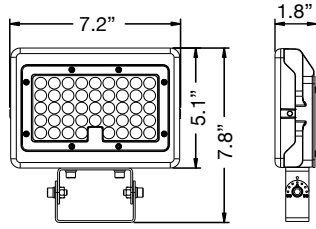


Trunnion Bracket - 15W/ 30W

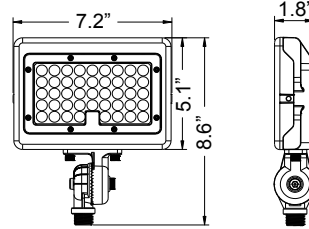


Knuckle Bracket - 15W/30W

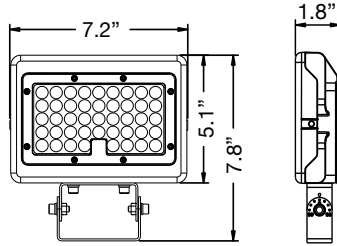


Trunnion Bracket - 50W

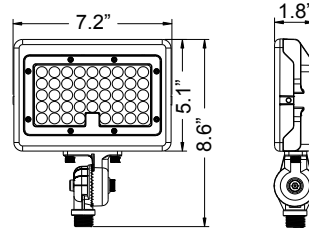

Knuckle Bracket - 50W

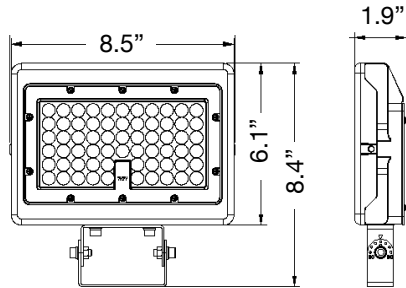

Trunnion Bracket - 80W

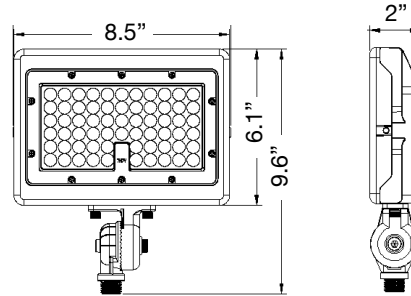

Knuckle Bracket - 80W

30W 3-CCT Selectable

Model	Voltage	Watts	Lumens	Color	CRI
LED-ARL-2P30-TRI-BZ-TR-PC	120-277V	15/30w	2,100/4,200	30/40/50k	>80
LED-ARL-2P30-TRI-BZ-KN-PC	120-277V	15/30w	2,100/4,200	30/40/50k	>80
LED-ARL-2P30-TRI-WH-KN-PC	120-277V	15/30w	2,100/4,200	30/40/50k	>80

50W 3-CCT Selectable

Model	Voltage	Watts	Lumens	Color	CRI
LED-ARL-2P50-TRI-BZ-TR-PC	120-277V	35/50w	4,900/7,000	30/40/50k	>80
LED-ARL-2P50-TRI-WH-TR-PC	120-277V	35/50w	4,900/7,000	30/40/50k	>80
LED-ARL-2P50-TRI-BZ-KN-PC	120-277V	35/50w	4,900/7,000	30/40/50k	>80
LED-ARL-2P50-TRI-WH-KN-PC	120-277V	35/50w	4,900/7,000	30/40/50k	>80

80W 3-CCT Selectable

Model	Voltage	Watts	Lumens	Color	CRI
LED-ARL-3P80-TRI-BZ-KN-PC	120-277V	60/70/80w	8,400/9,800/11,200	30/40/50k	>80
LED-ARL-3P80-TRI-WH-KN-PC	120-277V	60/70/80w	8,400/9,800/11,200	30/40/50k	>80
LED-ARL-3P80-TRI-BZ-TR-PC	120-277V	60/70/80w	8,400/9,800/11,200	30/40/50k	>80