



Bullet Flood Lights: Magna-Line

3-CCT & Power Selectable w/ Photocell



WATT	LUMENS
15	1875
20	2500
25	3125

Detail Specification:

- Finish: Bronze or White
- IP Rating: Wet Location
- Beam Angle: 60° NEMA 4
- CCT: 30/40/50K Selectable
- Wattage: 25/20/15W Selectable
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 122° F
- Lens: PC Lens: Clear acrylic with optics
- Average life (L70) of 70,000 hours

Applications:

- Landscape
- Walkways & Pathways
- Hospitality, Multi-Family
- Outdoor Corridors
- General Outdoor Lighting
- Residential, Commercial and Industrial

Product Information:

- Sturdy die-cast aluminum housing finished with corrosion free powder coat
- Photocell included on each fixture. Easy disconnect.
- 1.5' STJW 18.3 AWG cable whip included
- Select-n-Switch Technology
- Instant-On to full brightness

Driver Options:

- UNV: 120-277V 0-10V Dimmable
- Built in 6Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

Mounting & Installation:

- Two standard arms:
 - 1/2" Knuckle Mount
 - Trunnion Mount
- Adjustable 180° arms

Certifications:

- UL Listed for USA and CA
- DLC Listed
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series

LED-BLT-3P25W-TRI-BZ-KN-UNV

1/2" Knuckle - Bronze Finish

LED-BLT-3P25W-TRI-WH-KN-UNV

1/2" Knuckle - White Finish

LED-BLT-3P25W-TRI-BZ-TR-UNV

Trunnion - Bronze Finish


Bullet Flood Lights: Magna-Line

3-CCT & Power Selectable w/ Photocell

FEATURES




DIMENSIONS

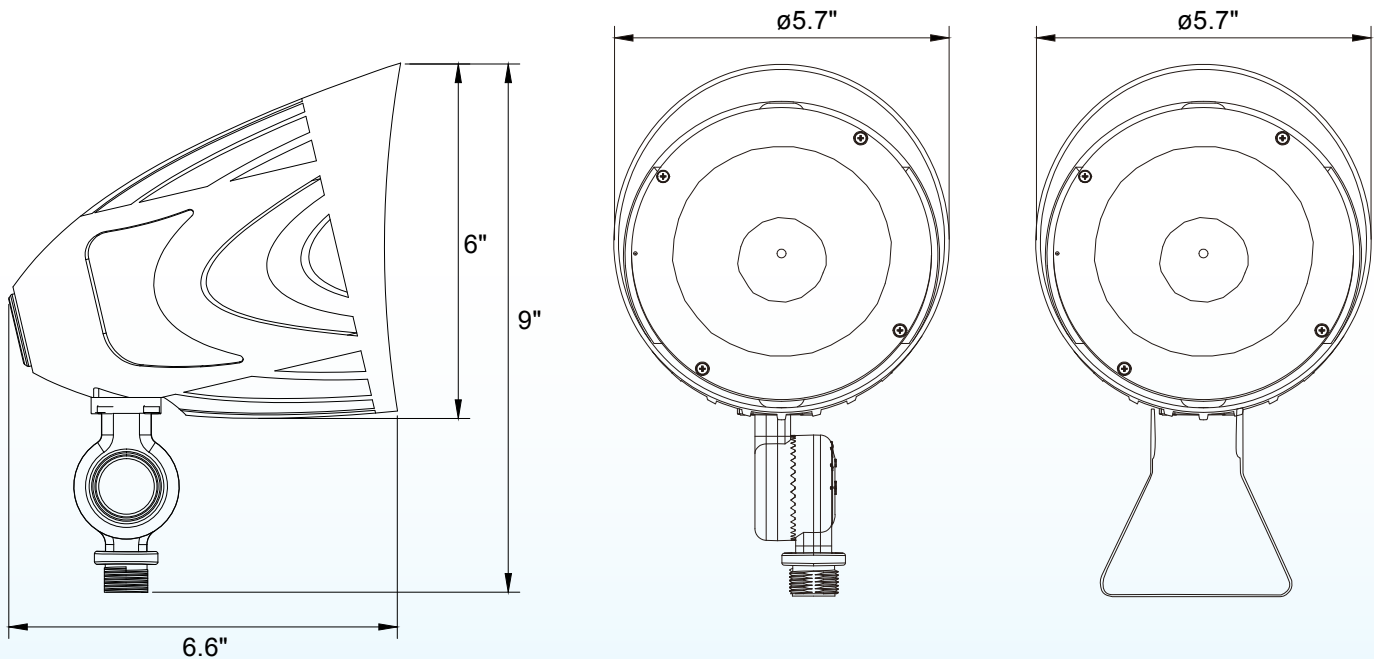

Bullet Flood Lights: Magna-Line


3-CCT & Power Selectable w/ Photocell

CCT & WATT SELECTABLE

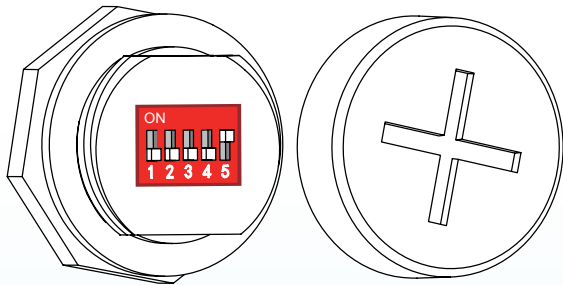


CCT & Wattage Selectable


Wattage Select



100% (Default)




80%



60%

Photocell




Sensor ON




Sensor OFF
(Default)


CCT Select



5000K (Default)



4000K



3000K