


# Backlite-Line: LED Panels

## 3-CCT & 3-Power Selectable

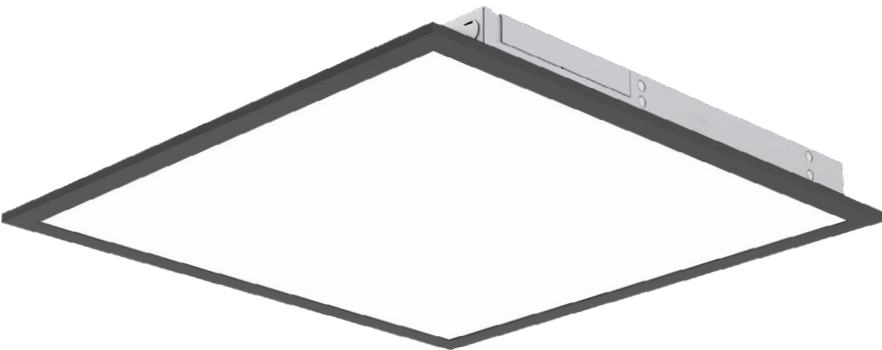

### Detail Specifications:

- Finish: White, Custom finishes available
- IP Rating: Damp Location (IP44)
- Beam Angle: 110°
- Chip: SMD 2835, R9 >50, CRI >80
- 3 Step MacAdam Ellipses
- Operating Temperature: -40° - 114° F
- Lens: Frosted, non-yellowing
- Average life (L70) of 50,000 hours

### Applications:

- General Indoor Lighting
- Utility & Storage
- Garage Structures
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality
- Commercial and Industrial

### Product Information:

- Aluminum housing finished with corrosion free power coat
- Even light distribution
- Lightweight for easier installation
- 3-CCT & 3-Power Selectable

### Driver Options:

- UNV: 120-277V 0-10V Dimmable
- Optional 347-480V step down transformer available
- THD: <15% (+/-5% tolerance), PF >0.9, 50/60Hz
- Isolated Driver
- Flicker Free

### Mounting & Installations:

- Lay-in ceilings for 5/8" and 3/8" ceiling widths
- Built-in earthquake clips
- Optional 9' suspension kit available
- Optional surface mount, drywall kit available
- Use surface mount and suspension kit for an aesthetically pleasing design

### Certifications:

- UL Listed for USA Only
- DLC Listed
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

**Series**  
**LED-BPL-2X2-3M40-TRI-BLK -**  
 20/30/40W • 2,200/3,300/4,400lm  
 120-277V

**Emergency**  
 (blank)  
 No Emergency  
**EMB**  
 Emergency  
 Backup

**Optional Accessories (Order Separately)**

Suspension Kits	Surface Mount Kits <sup>1</sup>	Drywall Kits
<b>SK-9FT-ADJ-2</b> 9' Suspension Kit	<b>2X2-SM-3"</b> 3" Height	<b>LED-PNL-2X2-FLNG</b> Drywall Kit
<b>CK-6FT-V</b> 6' Chain Hanging Kit		
<b>LED-PNL-2X4-SK</b> 3.5' Suspension Kit, Works for All Sizes		

1. Custom height options available. Contact us.

# Backlite-Line: LED Panels

## 3-CCT & 3-Power Selectable


### FEATURES

3-CCT Selectable

Powder-Coated  
Black Frame

Frosted Lens

Unique Back-Lit Design




**Sticky Slim Test Button**  
Test button will be pre-installed to the flange of the fixture. No need for external junction box for test switch


**Works for Drop Ceiling  
Flange, Surface Mount Application**

Emergency Backup

Integrated Driver

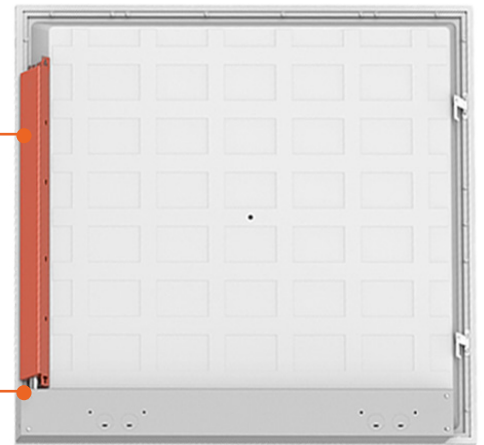

### DIMENSIONS

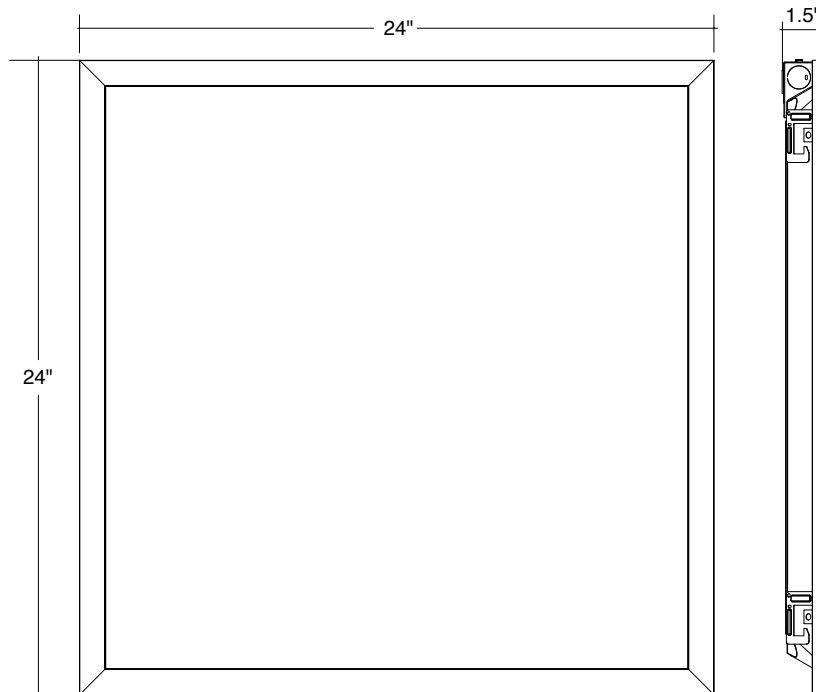

# Backlite-Line: LED Panels

## 3-CCT & 3-Power Selectable

### ACCESSORIES




**SK-9FT-ADJ-2**  
**LED-PNL-2X4-SK**



**CK-6FT-V**



**2x2**

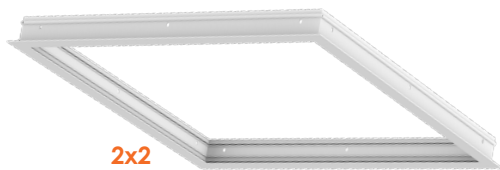

**2x2**

Model	Voltage	Watts	Lumens	Color	CRI
LED-BPL-2x2-3M40-TRI-BLK	120/277V	20/30/40w	2200/3300/4400	30/40/50k	>80

### SUSPENSION KITS

Accessory	Description
SK-9FT-ADJ-2	9' Suspension Kit
CK-6FT-V	6' Chain Hanging Kit
LED-PNL-2X4-SK	3.5' Suspension Kit, works for all sizes

### SURFACE MOUNT KITS

Accessory	Description
2X2-SM-3"	2X2 Surface Mount Kit 3" Height for all Panels and Troffers

### DRYWALL KITS

Accessory	Description
LED-PNL-2X2-FLNG	Flange (Drywall) Kit for Panels for all 2X2 Fixtures