



# SnapTrim-Line: 2" Gimbal Downlights

## Canless Series



### Detail Specifications:

- Finish: White or Black
- IP54 Wet Location Rated
- 5W 350 Lumens
- Beam Angle: 38° standard
- Chip: COB Chip, R9 >50, CRI >90
- 3 Step MacAdam Ellipses
- Operating Temperature: -40° - 114° F
- Lens: Clear, non-yellowing
- Average life (L70) of 50,000 hours

### Applications:

- Accent Lighting
- Displays, Cabinets, Bars
- Residential & Multifamily

### Product Information:

- Standard white round trim included
- Metal housing and trim for better heat dissipation
- Optional emergency backup available: delivers full lumens in EM mode up to 25W
- SnapTrim Canless: Spring clips with remote j-box eliminates can

### Driver Options:

- 12V Low Voltage
- Built in 2.5Kv Surge Protector
- Flicker Free

### Mounting & Installation:

- Cut Out Dimension: 2 1/8"
- Optional new construction plate available
- This fixture does not fit into a recessed can
- No housing needed in remodel applications, tension clips mount into 1/2" to 1.5" thick ceiling
- Can be removed from below the ceiling for service or replacement
- Pre-wired junction box with circuit wiring built in (3 in/ 3 out)

### Certifications:

- ETL Listed for USA and CA
- Energy Star Certified
- CA Title 24 JA8-2022 CEC Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017
- IC Rated and ASTM-E283 Air-Tight

### Series

LED-DLJBX-ADJ-2-5W-30K-WH-12V  
 LED-DLJBX-ADJ-2-5W-30K-BLK-12V

### Optional Accessories (Order Separately)

#### New Construction Plates Drivers

#### CUNV-NC-ICAT-7H

Universal Plate  
 with Hanging Bars

#### CUNV-JBX-RI-XL

Universal Rough In  
 Plate Extra Long

#### CV-12V-DC-20W-DIM

Connect up to 3 fixtures

#### CV-12V-DC-60W-DIM

Connect up to 9 fixtures

#### CV-12V-DC-150W-DIM


Connect up to 20 fixtures

1. Trims are field changeable. For brushed nickel finish it is recommended to use the black body fixtures.


# SnapTrim-Line: 2" Gimbal Downlights

## Canless Series

### FEATURES

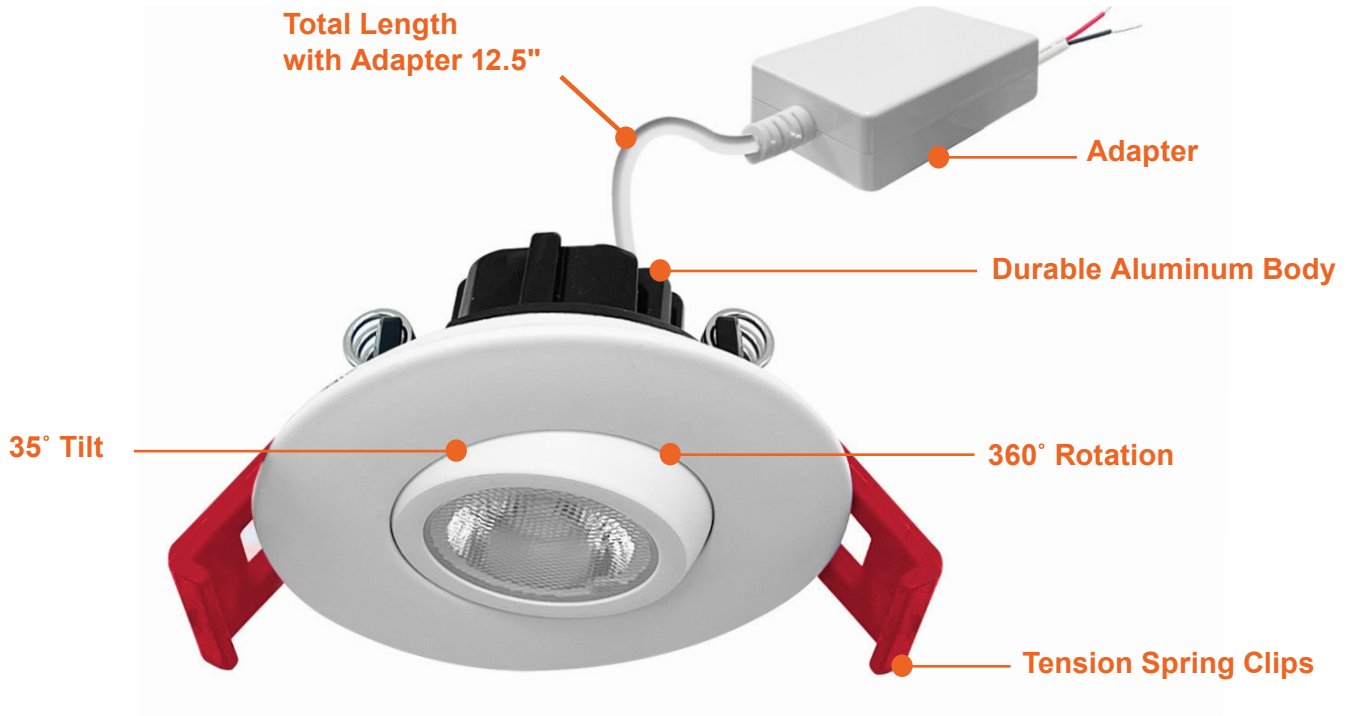


### DIMENSIONS

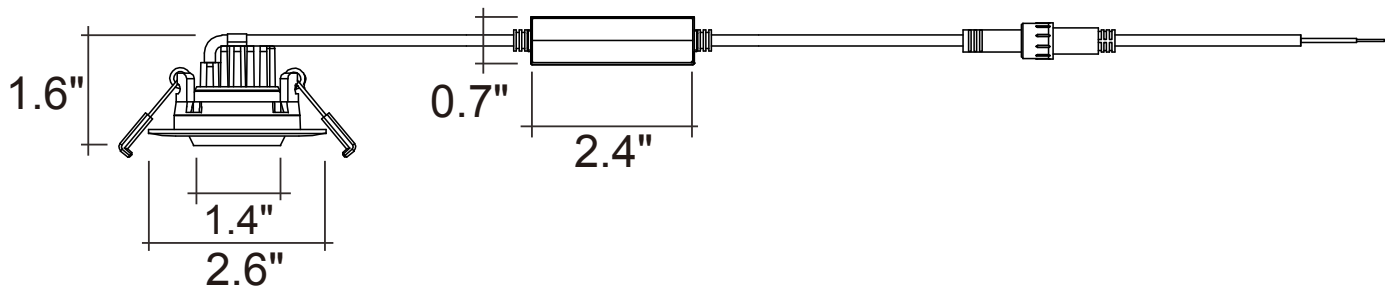


# SnapTrim-Line: 2" Gimbal Downlights Canless Series

## ACCESSORIES

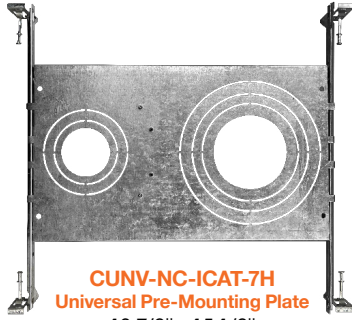

**CUNV-NC-ICAT-7H**  
Universal Pre-Mounting Plate  
13 7/8" x 15 1/8"

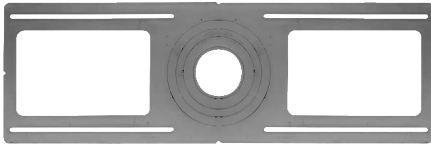

**CUNV-JBX-RI-XL**  
7" x 26"



**CV-12V-DC-20W-DIM**  
**CV-12V-DC-60W-DIM**



**CV-12V-DC-150W-DIM**

Model	Voltage	Watts	Lumens	Color	CRI
LED-DLJBX-ADJ-2-5W-30K-WH-12V	12V	5w	350	27/30/35/40/50K	>90
LED-DLJBX-ADJ-2-5W-30K-BLK-12V	12V	5w	350	27/30/35/40/50K	>90

## CONSTRUCTION PLATES

Accessory	Description
CUNV-NC-ICAT-7H	1" 2"3" 3.5" 4" 5" 6" Universal Pre-Mounting New Construction Plate
CUNV-JBX-RI-XL	Universal tough in plate (Extra Long)

## Constant Voltage Triac Dimmable Transformers

Model	Voltage	Watts
CV-12V-DC-20W-DIM	Input: 120-277V Output: 12V DC	20w
CV-12V-DC-60W-DIM	Input: 120-277V Output: 12V DC	60w
CV-12V-DC-150W-DIM	Input: 120-277V Output: 12V DC	150w

## TESTED COMPATIBLE DIMMERS

Other dimmers may be compatible but have not been tested. Please contact us for more information.

### TRIAC/ELV Dimmers

Lutron	Leviton	Legrand	Cooper
AYCL-153P	6633	ADTP703TU	9540
DV-600PR	6674	H703PTW	DAL06P
DVCL-153P	6602		
MACL-153MH	IPL06		
MRF2-6CL			
D-600P			
NTELV-300P			
S-600P			
CT-600P			
CTCL-153P			
TG-600P			
TCCL-153P			