


3" Regressed Gimbal Downlight: SnapTrim-Line Canless Series

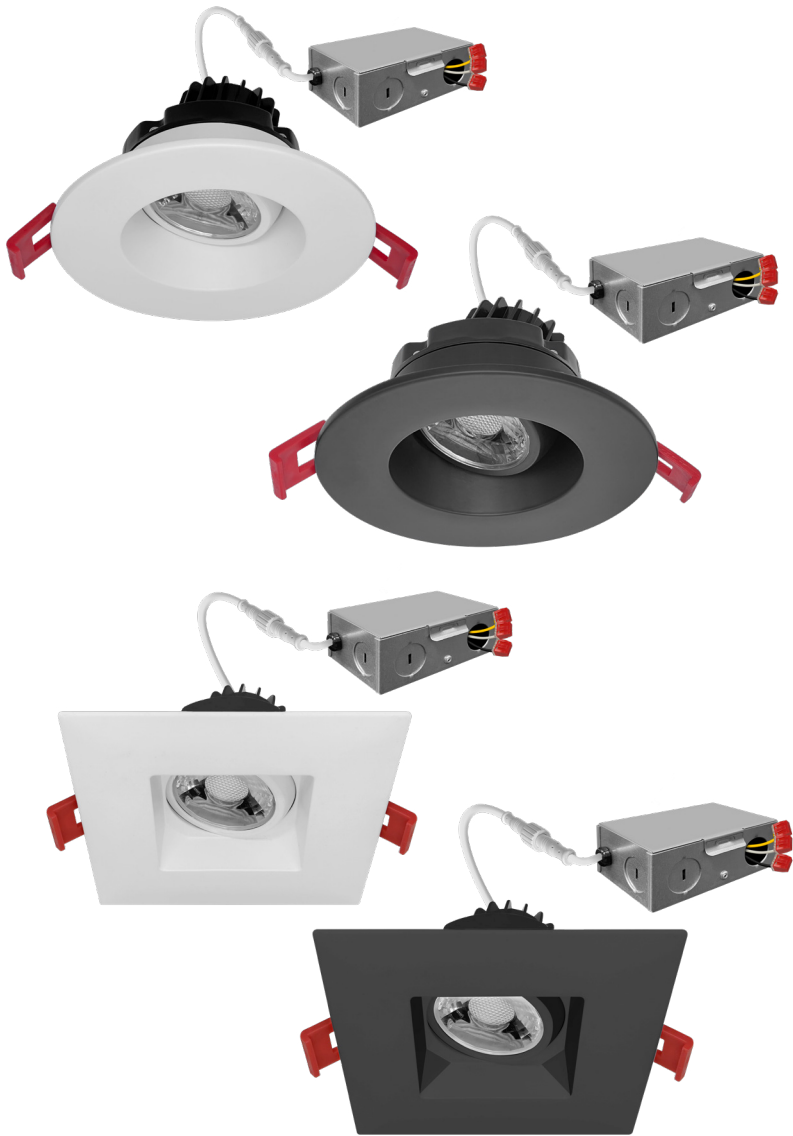

Detail Specifications:

- Finish: White, Black, Custom
- IP54 Wet Location Rated
- 8W 500 Lumens
- Beam Angle: 38° standard, other options available
- Chip: COB Chip, R9 >50, CRI >90
- 3 Step MacAdam Ellipses
- Operating Temperature: -40° - 114° F
- Lens: Clear, non-yellowing
- Average life (L70) of 50,000 hours

Applications:

- General Recessed Lighting
- Residential & Multifamily
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality

Product Information:

- 5-CCT Selectable: 27/30/35/40/50K
- Metal housing and trim for better heat dissipation
- Optional emergency backup available: delivers full lumens in EM mode up to 25W
- SnapTrim Canless: Spring clips with remote j-box eliminates can

Driver Options:

- 120V Triac Dimmable
- Built in 2.5Kv Surge Protector
- Flicker Free

Mounting & Installation:

- Cut Out Dimension: 3-3/8"
- Optional new construction plate available
- This fixture does not fit into a recessed can
- No housing needed in remodel applications, tension clips mount into 1/2" to 1.5" thick ceiling
- Can be removed from below the ceiling for service or replacement
- Pre-wired junction box with circuit wiring built in (3 in/ 3 out)

Certifications:

- ETL Listed for USA and CA
- CA Title 24 JA8-2022 CEC Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017
- IC Rated and ASTM-E283 Air-Tight

| Series | Beam Angle | Emergency |
|-------------------------------------------------------|------------------------------|-----------------------------------|
| LED-DLJBX-ADJ-3RG-8W-5CCT-WH-R White Round Trim | (Blank) 38° Degree 24D | (Blank) No Emergency Backup |
| LED-DLJBX-ADJ-3RG-8W-5CCT-BLK-R Black Round Trim | 24° Degree 60D | EMB Emergency Backup |
| LED-DLJBX-ADJ-3RG-8W-5CCT-WH-SQ White Square Trim | 60° Degree | |
| LED-DLJBX-ADJ-3RG-8W-5CCT-BLK-SQ Black Square Trim | | |


Optional Accessories (Order Separately)

| New Construction Plates | Extension Cables | Emergency Backup ¹ (field install) | Optics |
|-----------------------------------------------------------------|------------------------------------------|-----------------------------------------------------------------|-----------------------------------------------------------|
| CUNV-NC-ICAT-7H Universal Plate with Hanging Bars | JBX-EXT-6'-2PIN 6' Extension | LED-EMB-25W-HV -0/10V-2P Up to 24W fixtures | OPTIC-42X14-24D 24 Degree Field Install Lens |
| CUNV-JBX-RI-XL Universal Rough In Plate Extra Long | JBX-EXT-10'-2PIN 10' Extension | | OPTIC-42X14-60D 60 Degree Field Install Lens |
| | JBX-EXT-12'-2PIN 12' Extension | | |


1. Field installable.
Lasts 90 minutes

3" Regressed Gimbal Downlight: SnapTrim-Line Canless Series

FEATURES

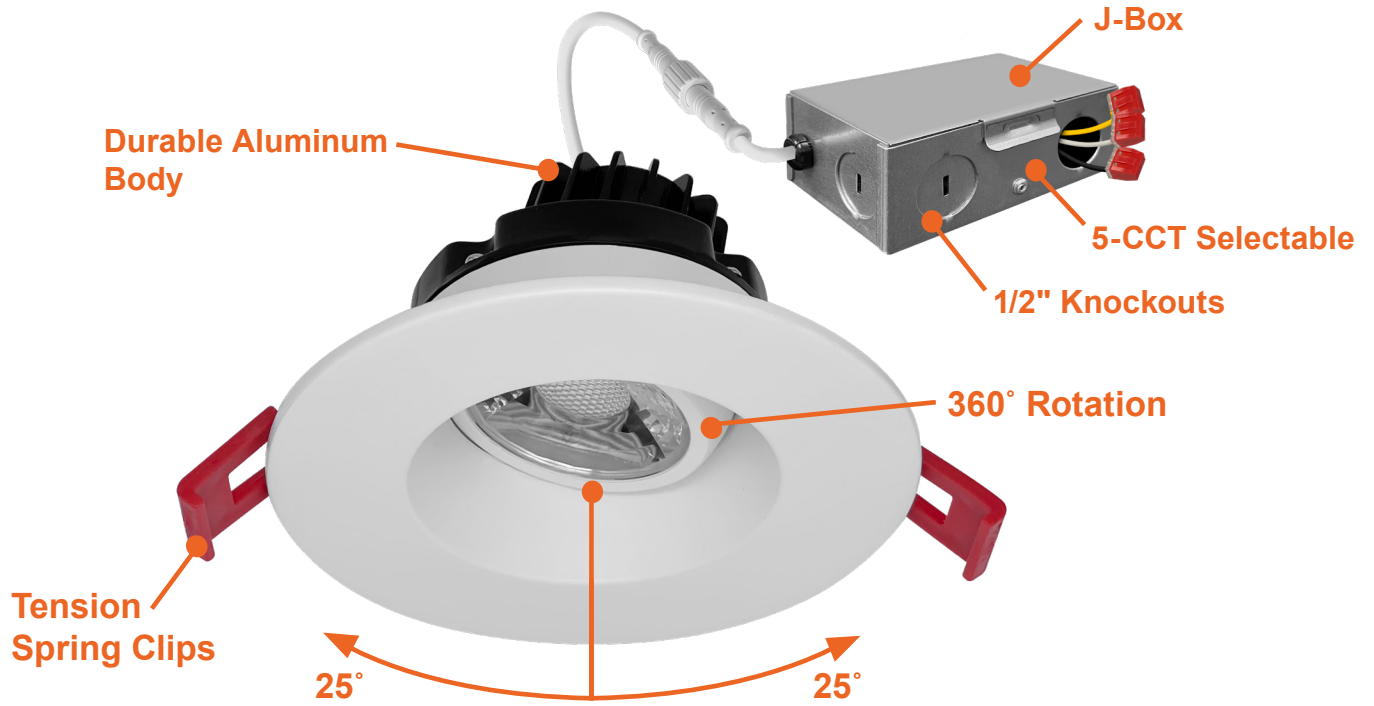


DIMENSIONS

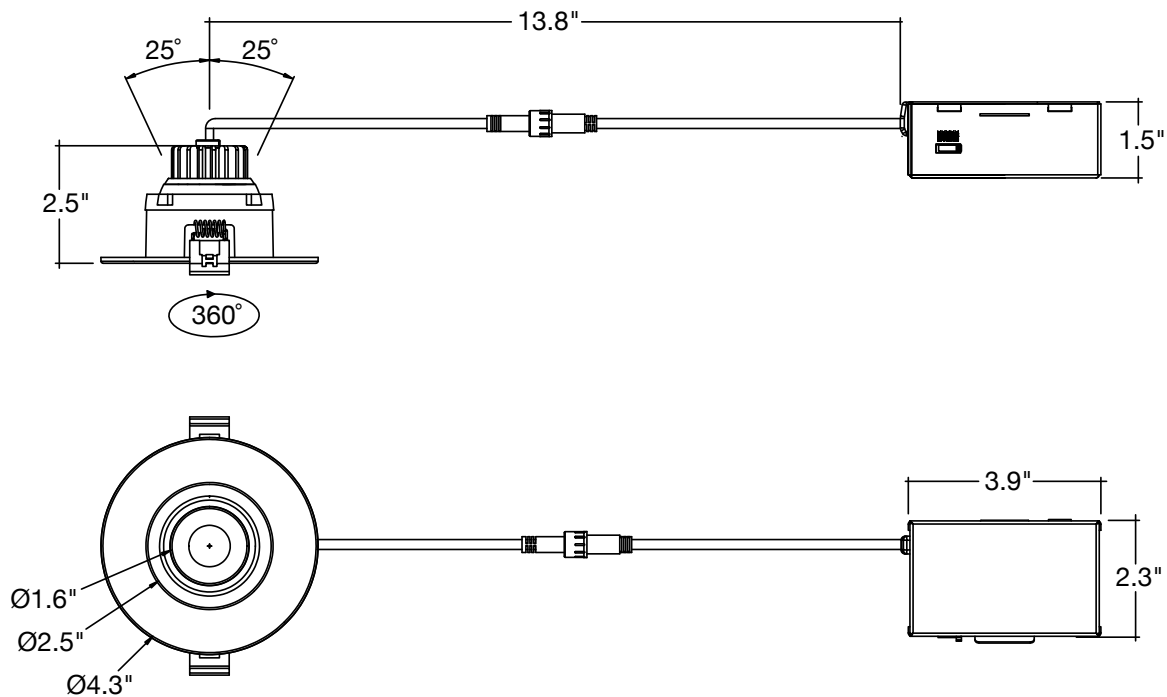


3" Regressed Gimbal Downlight: SnapTrim-Line Canless Series

ACCESSORIES

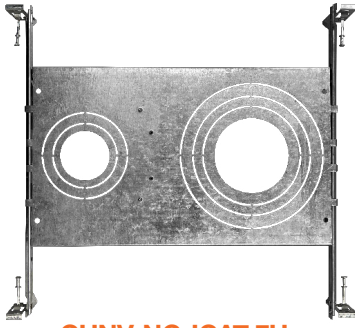

CUNV-NC-ICAT-7H
Universal Pre-Mounting Plate
13 7/8" x 15 1/8"

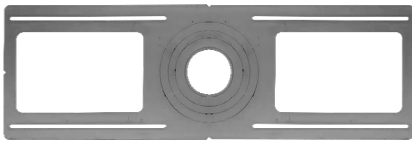

CUNV-JBX-RI-XL
7" x 26"



JBX-EXT
6' / 10' / 12' Extension Cable



LED-EMB-25W-HV-0/10V-2P



OPTIC-42X14-24D
OPTIC-42X14-60D

| Model | Voltage | Watts | Lumens | Color | CRI |
|---------------------------------|---------|-------|--------|-----------------|-----|
| LED-DLJBX-ADJ-3RG-8W-5CCT-WH-R | 120V | 8w | 600 | 27/30/35/40/50K | >90 |
| LED-DLJBX-ADJ-3RG-8W-5CCT-BLK-R | 120V | 8w | 600 | 27/30/35/40/50K | >90 |

CONSTRUCTION PLATES

| Accessory | Description |
|-----------------|---------------------------------------------------------------------|
| CUNV-NC-ICAT-7H | 1" 2"3" 3.5" 4" 5" 6" Universal Pre-Mounting New Construction Plate |
| CUNV-JBX-RI-XL | Universal tough in plate (Extra Long) |

EXTENSION CABLE

| Accessory | Description |
|------------------|---------------------|
| JBX-EXT-6'-2PIN | 6" Extension Cable |
| JBX-EXT-10'-2PIN | 10" Extension Cable |
| JBX-EXT-12'-2PIN | 12" Extension Cable |

EMERGENCY BACKUP

| Accessory | Description |
|-------------------------|--------------------|
| LED-EMB-25W-HV-0/10V-2P | Up to 24W fixtures |

OPTICS

| Accessory | Description |
|-----------------|------------------------------|
| OPTIC-42X14-24D | 24 Degree Field Install Lens |
| OPTIC-42X14-60D | 60 Degree Field Install Lens |

TESTED COMPATIBLE DIMMERS

Other dimmers may be compatible but have not been tested. Please contact us for more information.

TRIAC/ELV Dimmers

| Lutron | Leviton | Legrand | Cooper |
|------------|---------|-----------|--------|
| AYCL-153P | 6633 | ADTP703TU | 9540 |
| DV-600PR | 6674 | H703PTW | DAL06P |
| DVCL-153P | 6602 | | |
| MACL-153MH | IPL06 | | |
| MRF2-6CL | | | |
| D-600P | | | |
| NTELV-300P | | | |
| S-600P | | | |
| CT-600P | | | |
| CTCL-153P | | | |
| TG-600P | | | |
| TCCL-153P | | | |
| L-153P | | | |