| Project: | Part #: |
|----------|---------|
| Type: | |

4" Adjustable Downlight: SnapTrim-Line

Canless Series









Canless Downlights





360° Rotation

20° Tilt

Detail Specifications:

- · Finish: White, Black, Brushed Nickel
- IP54 Wet Location Rated
- · Beam Angle: 38°standard, other options available
- Chip: COB Chip, R9 >50, CRI >90
- 3 Step MacAdam Ellipses
- Operating Temperature: -40° 114° F
- · Lens: Clear, non-yellowing
- Average life (L70) of 50,000 hours

Applications:

- · General Recessed Lighting
- · Residential & Multifamily
- · Office and Meeting Rooms
- · Education, Healthcare, Retail, Hospitality

Product Information:

- 5-CCT Selectable: 27/30/35/40/50K or warm dimming 30 to 18K
- · Metal housing and trim for better heat dissipation
- · Optional emergency backup available: delivers full lumens in EM mode up to 25W
- SnapTrim Canless: Spring clips with remote j-box eliminates can

Driver Options:

- 120V Triac Dimmable
- · Built in 2.5Kv Surge Protector
- Flicker Free

Mounting & Installation:

- Cut Out Dimension: 4-1/4"
- Optional new construction plate available
- This fixture does not fit into a recessed can
- · No housing needed in remodel applications, tension clips mount into 1/2" to 1.5" thick ceiling
- Can be removed from below the ceiling for service or replacement
- Pre-wired junction box with circuit wiring built in (3 in/ 3 out)

Certifications:


- · ETL Listed for USA and CA
- CA Title 24 JA8-2022 CEC Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017
- IC Rated and ASTM-E283 Air-Tight

| 5-CCT | 27/30/35/40/50K | |
|-------|---------------------|--|
| 3WD | 30-18K Warm Dimming | |


Optional Accessories (Order Separately) Beam Angle Emergency Series Emergency Backup 1 (field install) New Construction Plates **Extension Cables** Optics LED-DLJBX-ADJ-4-12W-5CCT-WH-R (Blank) (Blank) 12W • 750LM • White Round Trim 38° Degree No Emergency OPTIC-75X24-24D **CUNV-NC-ICAT-7H** JBX-EXT-6'-2PIN LED-EMB-25W-HV 24D LED-DLJBX-ADJ-4-12W-5CCT-BLK-R Backup 24 Degree Field Universal Plate -0/10V-2P JBX-EXT-10'-2PIN Up to 24W fixtures 12W • 750LM • Black Round Trim 24° Degree **EMB** with Hanging Bars OPTIC-75X24-60D LED-DLJBX-ADJ-4-18W-5CCT-WH-R 60D Emergency **CUNV-JBX-RI-XL** 10' Extension JBX-EXT-12'-2PIN 60 Degree Field 18W • 1,500LM • White Round Trim 60° Degree Backup Universal Rough In Install Lens LED-DLJBX-ADJ-4-18W-5CCT-BLK-R 12' Extension Plate Extra Long 18W • 1,500LM • Black Round Trim LED-DLJBX-ADJ-4-12W-5CCT-BN-R 12W • 750LM • Brushed Nickel Round Trim LED-DLJBX-ADJ-4-12W-3WD-WH-R 12W • 750LM • White Round Trim 1. Field installable. Lasts 90 minutes

360° Rotation

4" Adjustable Downlight: SnapTrim-Line Canless Series

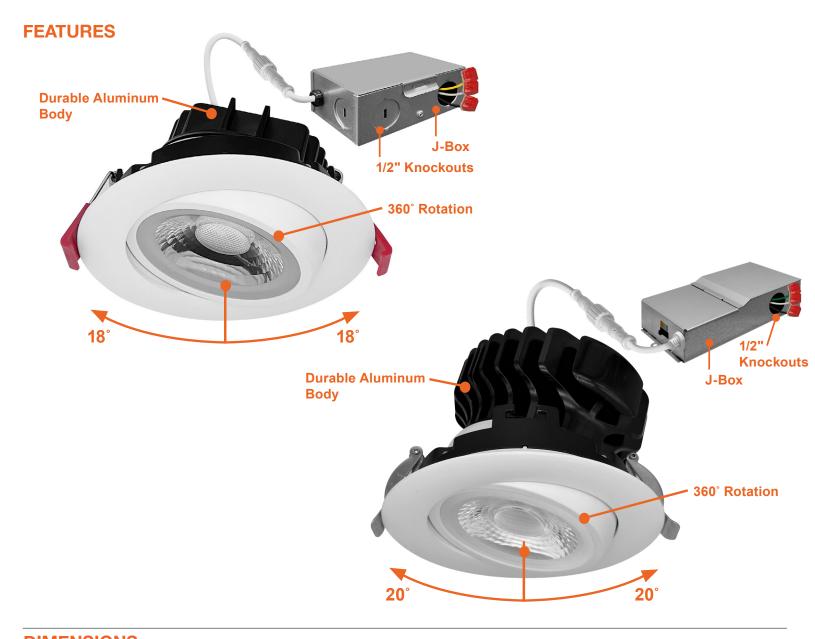



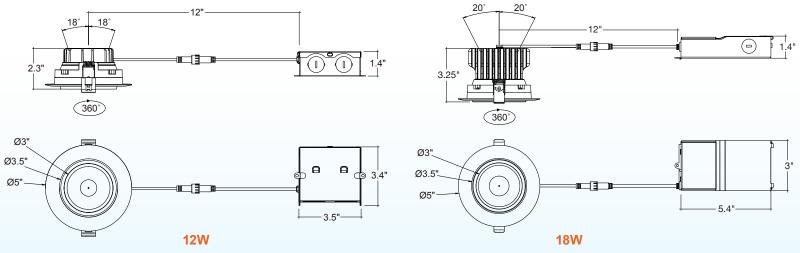


Specs and model numbers are subject to change with or without notice.

4" Adjustable Downlight: SnapTrim-Line

Canless Series

ACCESSORIES



CUNV-NC-ICAT-7H Universal Pre-Mounting Plate 13 7/8" x 15 1/8"



CUNV-JBX-RI-XL 7" x 26"



JBX-EXT 6' / 10' / 12' Extension Cable



LED-EMB-25W-HV-0/10V-2P



OPTIC-75X24-24D OPTIC-75X24-60D

CRI LED-DLJBX-ADJ-4-12W-5CCT-WH-R 120V 12w 750 27/30/35/40/50K >90 LED-DLJBX-ADJ-4-12W-5CCT-BLK-R 120V 12w 750 27/30/35/40/50K >90 LED-DLJBX-ADJ-4-12W-5CCT-BN-R 120V 12w 750 27/30/35/40/50K >90 LED-DLJBX-ADJ-4-12W-3WD-WH-R 120V 12w 750 30-->18k >90 LED-DLJBX-ADJ-4-18W-5CCT-BLK-R 120V 18w 1,500 27/30/35/40/50K >90 LED-DLJBX-ADJ-4-18W-5CCT-WH-R 120V 18w 1,500 27/30/35/40/50K

CONSTRUCTION PLATES

| Accessory | Description |
|-----------------|------------------------------------------------------------------------|
| CUNV-NC-ICAT-7H | 1" 2"3" 3.5" 4" 5" 6" Universal Pre-Mounting New Construction Plate |
| CUNV-JBX-RI-XL | Universal tough in plate (Extra Long) |

EXTENSION CABLE

| Accessory | Description |
|------------------|---------------------|
| JBX-EXT-6'-2PIN | 6" Extension Cable |
| JBX-EXT-10'-2PIN | 10" Extension Cable |
| JBX-EXT-12'-2PIN | 12" Extension Cable |

EMERGENCY BACKUP

| Accessory | Description |
|-------------------------|--------------------|
| LED-EMB-25W-HV-0/10V-2P | Up to 24W fixtures |

OPTICS

| Accessory | Description | |
|-----------------|------------------------------|--|
| OPTIC-75X24-24D | 24 Degree Field Install Lens | |
| OPTIC-75X24-60D | 60 Degree Field Install Lens | |

TESTED COMPATIBLE DIMMERS

Other dimmers may be compatible but have not been tested. Please contact us for more information.

TRIAC/ELV Dimmers

| Lutron | Leviton | Legrand | Cooper |
|------------|---------|-----------|--------|
| AYCL-153P | 6633 | ADTP703TU | 9540 |
| DV-600PR | 6674 | H703PTW | DAL06P |
| DVCL-153P | 6602 | | |
| MACL-153MH | IPL06 | | |
| MRF2-6CL | | | |
| D-600P | | | |
| NTELV-300P | | | |
| S-600P | | | |
| CT-600P | | | |
| CTCL-153P | | | |
| TG-600P | | | |
| TCCL-153P | | | |
| L-153P | | | |