

Project: _____ Part #: _____

Type: _____

Emergency Exit Sign (Single/Double Sided)



Product Information:

- Injection-Molded Thermoplastic Housing
- 140 Lumens
- UL-940V-0 Flame Rating
- Wall, Ceiling and End Mounting
- Input Voltage: 120/277VAC 60Hz
- Power Consumption: 3.5W Max
- Output: 4W Max
- Ni-Cd Battery, 3.6V 1000mAh
- Backup Time: \geq 90 Minutes
- Operating Temperature: 0°F ~ 104° F
- Remote Capable
- Compatible with but Not Limited to LED-EM-RC-1, LED-EM-RC-2
- 5 Year Limited Warranty

Product *Color* *Finish*
L E D - E M - E X T - **W H - C M B - R C**
1 **2** **3** **4**

1 Product
LED-EM-EXT Emergency Exit Sign

2 Color
Red Red
Green Green

3 Finish
WH White

4 Description
CMB-RC Combo-Remote
 Capable

Specs and model numbers are subject to change with or without notice.

Emergency Exit Sign (Single/Double Sided)

FEATURES

Film Protectant



Fire-Retardant

Adjustable Knuckle

Super Bright COB LED

Wall & Ceiling Mount

DIMENSIONS

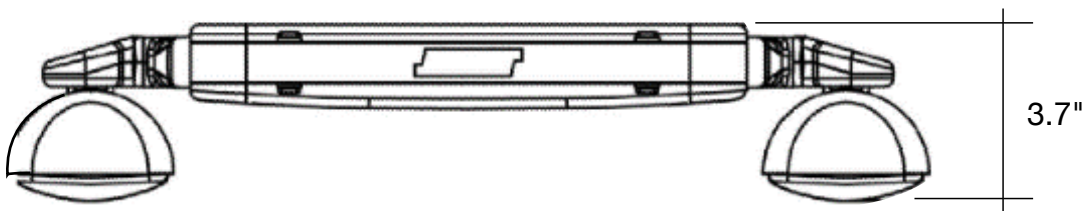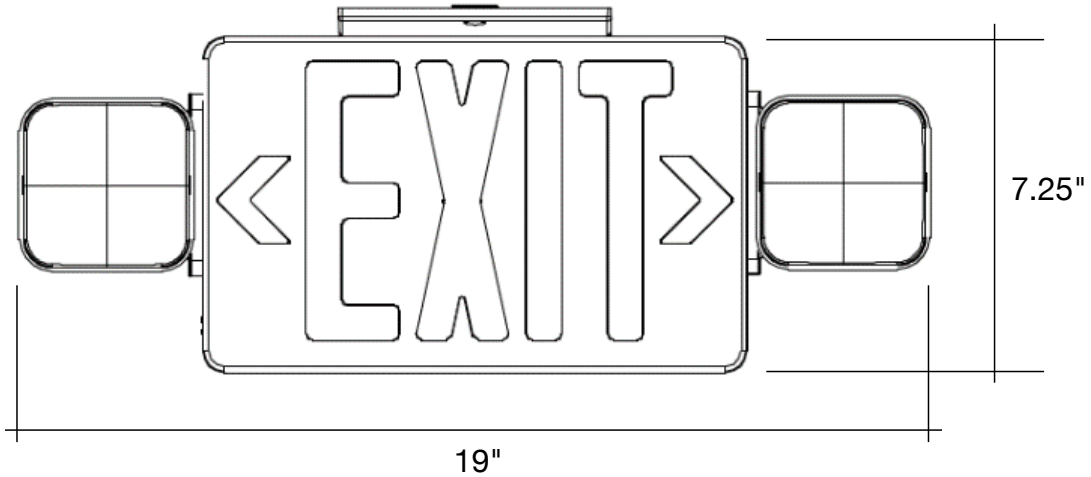

Specs and model numbers are subject to change with or without notice.