Project:

Type:

Part #:

#### **Emergency Exit Signs**

### (UL) CERTIFIE

# **Emergency Exit Sign** With Bug Eyes



- Detail Specifications: Finish: White Finish IP Rating: IP20, Dry Location
- Wattage: 3.5W
- Lumens: 140
- Operating Temperature: -40° 104° F
- Lens: Red or Green
- Remoted Capable
- Compatible with: LED-EM-RC-1, LED-EM-RC-2
- Average life (L70) of 50,000 hours

#### Applications:

- Exit Doors
- Corridor Intersections
- · Exit Stairways
- Exit Rramps

#### **Product Information:**

- · Built-in test switch and charge indicator
- · Injection-molded thermoplastic housing, PC cover
- Backup Time: >90 minutes
- Recharge time: 24 hours
  Single Face
- 6" height letters with ¾" stroke, viewable from 100ft away

#### **Driver Options:**

- Dual Voltage 120/277V
- PF >0.9, 50/60Hz

#### Mounting & Installations:

- · Wall and ceiling mounted
- Universal J-box mounting pattern

#### Certifications:

- UL Listed for USA and CA (UL94V-0 Flame Rating)
- Metts UL924, NDPA 101
- Approved for CA T24
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

<b>REMOTE HEAD OPTIONS</b>
LED-EM-RC-1
LED-EM-RC-2


Series


LED-EM-EXT-RG-WH-CMB-RC RedGreen Color Selectable

## **Emergency Exit Sign** With Bug Eyes

**FEATURES** 

# Fim Protectant Fine-Retardant CENTIFIC ENTIFICATION Adjustable Knuckle Wall & Ceiling Mount

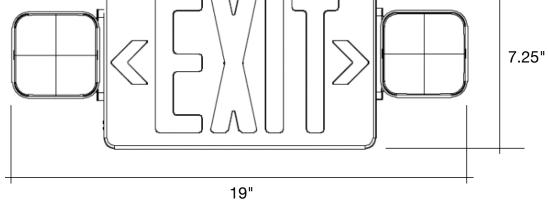

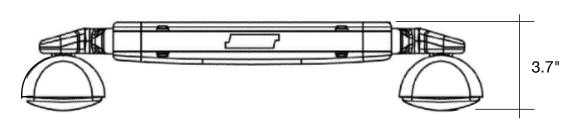

Specs and model numbers are subject to change with or without notice.