


T-30 Tubular Bulb Filament Series

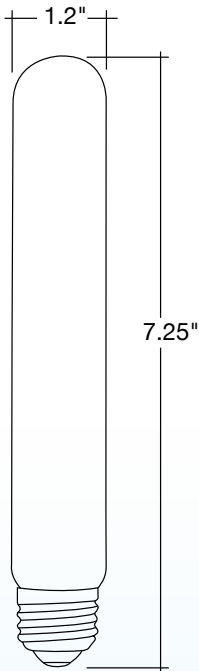

Detail Specifications

- IP Rating: Damp Location
- Beam Angle: Omni-Directional 360°
- Chip: Filament, R9- 78, CRI >90
- Operating Temperature: -4° - 114° F
- Average life (L70) of 25,000 hours

Applications:

- Decorative Lighting
- Interior Lighting
- Table & Floor Lamps
- Showcases
- Residential, Multi-Family, Commercial

Product Information:

- Suitable for use in existing fixtures
- Instant-On to full brightness

Driver Options:

- 120V
- Triac Dimmable
- PF >0.9, 50/60Hz

Mounting & Installation:

- E26 Socket
- Direct E26 Lamp Replacement

Certifications:

- UL Listed for USA and CA
- Title 20 and JA8-2022 Approved (30K Only)
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Dimmer List:

Leviton	6674
Lutron	LGCL-153P
Lutron	DVCL-153P
Lutron	CTCL-153P
Lutron	MAELV-300

Series

LED-FLM-T30-4W-18K

400 Lumens 40W Equivalent

LED-FLM-T30-5W-30K

400 Lumens 40W Equivalent

LED-FLM-T30-5W-50K

400 Lumens 40W Equivalent