

# MR-16 LED BULBS

## 5-CCT + EZ-Swap Optics



Replaceable Lens  
Beam Angle  
15°/30°/60°

### Detail Specifications:

- IP Rating: Wet Location
- Beam Angle: 45° Installed
  - 15/30/60° Included
- 5-CCT: 27/30/35/40/50K
- Chip: SMD
- Base: GU5.3
- Finish: Black
- Lens: Clear Ribbed w/ Optics
- Lumens:
  - 5W: 530LM 35-50W Halogen Equivalent
  - 8W: 700LM 50-75W Halogen Equivalent
- Voltage: 9-17V
- CRI: 90
- Housing: Di-cast
- Average life (L70) of 25,000 hours

### Applications:

- Halogen Retrofitting
- Walkways & Pathways
- Landscape Lighting
- General Lighting
- Residential, Multifamily, Commercial

### Product Information:

- Standard size of halogen versions
- Suitable for use in existing fixtures
- Approved for use in enclosed fixtures
- Fully potted
- Instant-On to full brightness
- Select-N-Switch Technology: 5-CCT + EZ Optic Swap

### Mounting & Installations:

- Compatible with electronic and magnetic low voltage systems

### Certifications:

- ETL Listed for USA and CA
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

### Series



**LED-MR16-5W-5CCT-4B-BL**

530LM

**LED-MR16-8W-5CCT-4B-BL**

700LM

## FEATURES

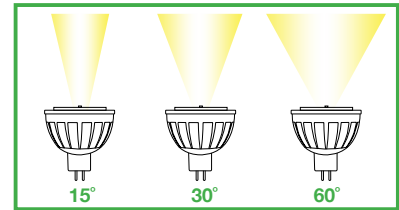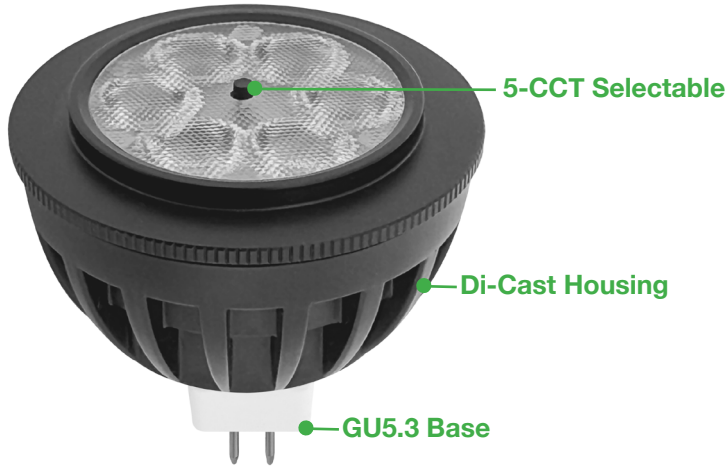

Beam Spread



15° / 30° / 60°  
Replaceable Lens



## DIMENSIONS

