

# PL LAMP: G24

## Fluorescent Replacement



EnVision LED has manufactured a G24 PL lamp replacement in LED that can work with or without the existing ballast. With a 360° angle, replace existing fluorescent G24 lamps in either vertical or horizontal direction. Unlike fluorescents, our LED lamp does not need time to warm up, it turns on instantly.

### Detail Specifications

- IP Rating: Damp Location
- Beam Angle: 360°
- Single CCT
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -4° - 114° F
- Average life (L70) of 50,000 hours

### Applications:

- Can Lights
- Recessed Housings
- Interior Lighting
- Downlighting
- Showcases
- Residential, Commercial and Industrial

### Product Information:

- Suitable for use in existing fixtures (view ballast compatible list)
- Instant-On to full brightness

### Driver Options:


- 120-277V
- Non-Dimmable
- PF >0.9, 50/60Hz

### Mounting & Installation:

- G24Q-1, G24Q-2, G24Q-3, GX24Q-2, GX24Q-3
- Direct PL Lamp Replacement

### Certifications:

- ETL Listed for USA and CA
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

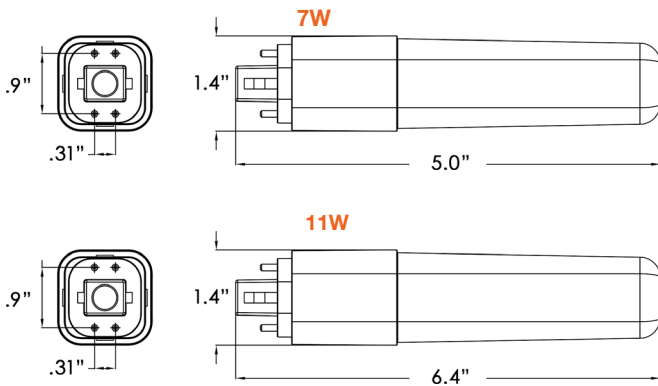

### Series

- LED-PL-G24-7W-40K**  
650LM • 13W Equivalent
- LED-PL-G24-7W-50K**  
650LM • 13W Equivalent
- LED-PL-G24-11W-30K**  
1300LM • 18 & 20W Equivalent
- LED-PL-G24-11W-40K**  
1300LM • 18 & 20W Equivalent
- LED-PL-G24-11W-50K**  
1300LM • 18 & 20W Equivalent

### Compatible Ballast List

<b>TRIAD</b> C242UNVME C2642UNVME C218UNVME	<b>SYLVANIA</b> QTP1/2X18CF QTP/2X16CF/UNV
<b>WATRAN</b> DBC218MVRSN DB1S26R120N	<b>FULHAM</b> NPY-120-226-CFL
<b>PHILLIPS</b> ICF-2S13-HI-LD ICF-2S18-HI-LD ICF-2S26-HI-LD ICF-2S42-HI-LD REZ-2Q26-M2-LD	<b>PONY</b> SC-120-113-CFL
<b>ROBERTSON</b> RED1L10-120	<b>KEYSTONE</b> LTEB-226-1-TP
	<b>LUMAPRO</b> 4KGJ7