



# SlimLine Surface

J-Box or E26

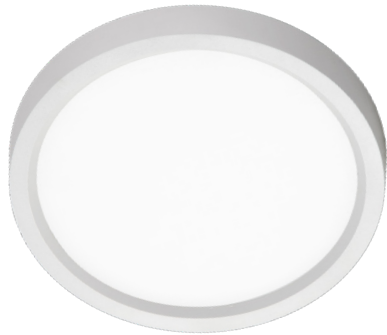

5" / 7" / 12" / 15" / 19" / 24"

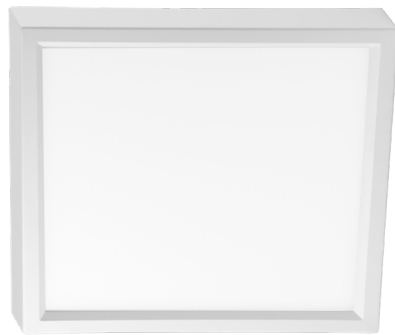

5" / 7" / 12"

WATT		LUMENS		COLOR	
10	650	30K	3000K		
15	1,000	TRI	30/40/50K		
22	1,450	5-CCT	27/30/35/40/50K		
24	1,800				
30	2,000				
35	2,200				
40	2,700				

### Detail Specifications:

- Finishes: White, Bronze, Black, Brushed Nickel
- IP Rating: Wet Location
- Beam Angle: 110°
- Chip: SMD 2835, R9 >50, CRI >90
- 3 Step MacAdam Ellipses
- Operating Temperature: -40° - 114° F
- Lens: Frosted Acrylic, non-yellowing
- Housing:
  - 5 & 7": Plastic
  - 12, 15, 19, 24": Metal
  - Trims: Metal
- Average life (L70) of 50,000 hours

### Applications:

- General Recessed Lighting
- Residential & Multifamily
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality

### Product Information:

- AC technology: slim and easy driverless installation
- Edge-lit technology: reduces glare with even light distribution
- Standard white round trim included: optional trims available

### Driver Options:

- 120V Triac dimmable down to 5%
- (120-277V 0-10V dimmable available on separate spec sheet)
- THD: <15% (+/-5% tolerance), PF >0.9, 50/60Hz
- AC Driverless technology
- Flicker Free

### Mounting & Installations:

- 30/40 Junction Box (including pancake j-box)
- Surface mount bracket included
- 5", 7", 12" Recessed can converter

### Certifications:

- ETL Listed for USA and CA
- Energy Star Certified
- CA Title 24 JA8-2022 CEC Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017
- IC Rated and ASTM-E283 Air-Tight
- Closet Rated

### Round Series

- LED-SLDSKR-5-10W-30K White Finish
- LED-SLDSKR-5-10W-5CCT-WH White Finish
- LED-SLDSKR-7-15W-30K White Finish
- LED-SLDSKR-7-15W-5CCT-WH White Finish
- LED-SLDSKR-12-22W-5CCT-WH White Finish
- LED-SLDSKR-12-24W-5CCT-WH White Finish
- LED-SLDSKR-15-30W-5CCT-WH White Finish
- LED-SLDSKR-15-30W-5CCT-BLK Black Finish
- LED-SLDSKR-15-30W-5CCT-BN Brushed Nickel
- LED-SLDSKR-19-35W-TRI-WH White Finish
- LED-SLDSKR-19-35W-5CCT-WH White Finish
- LED-SLDSKR-19-35W-5CCT-BLK Black Finish
- LED-SLDSKR-19-35W-5CCT-BN Brushed Nickel
- LED-SLDSKR-24-40W-5CCT-WH White Finish
- LED-SLDSKR-24-40W-5CCT-BLK Black Finish

### Square Series

- LED-SLDSKSQ-5-10W-TRI White Finish
- LED-SLDSKSQ-5-10W-5CCT-WH White Finish
- LED-SLDSKSQ-7-15W-TRI White Finish
- LED-SLDSKSQ-7-15W-5CCT-WH White Finish
- LED-SLDSKSQ-12-22W-5CCT-WH White Finish

### Optional Accessories (Order Separately)

Round Trims	Square Trims	Emergency Backup	Pendant Stem Mount
SLDSKR-5-TRIM-BLK 5" Round Black	SLDSKSQ-5-TRIM-BLK 5" Square Black	SLDSKR-7-EMB-UNV Surface mount pancake EMB	STM-JBX-6-WH 6" Stem Mount (Adjustable length) White Finish
SLDSKR-5-TRIM-BRZ 5" Round Bronze	SLDSKSQ-5-TRIM-BRZ 5" Square Bronze	SLDSKR-7-EMB-EMPTY-UNV Empty surface mount pancake EMB	STM-JBX-6-BLK 6" Stem Mount (Adjustable length) Black Finish
SLDSKR-5-TRIM-BNI 5" Round Brushed Nickel	SLDSKSQ-5-TRIM-BNI 5" Square Brushed Nickel	SLDSKR-12-EMB-UNV Surface mount pancake EMB	
SLDSKR-7-TRIM-BLK 7" Round Black	SLDSKSQ-7-TRIM-BLK 7" Square Black	SLDSKR-12-EMB-EMPTY-UNV Empty surface mount pancake EMB	
SLDSKR-7-TRIM-BRZ 7" Round Bronze	SLDSKSQ-7-TRIM-BRZ 7" Square Bronze	LED-EMB-25W-HV-2P For fixtures up to 25W	
SLDSKR-7-TRIM-BNI 7" Round Brushed Nickel	SLDSKSQ-7-TRIM-BNI 7" Square Brushed Nickel		
SLDSKR-12-TRIM-BLK 12" Round Black	SLDSKSQ-12-TRIM-BLK 12" Square Black		
SLDSKR-12-TRIM-BRZ 12" Round Bronze	SLDSKSQ-12-TRIM-BRZ 12" Square Bronze		
SLDSKR-12-TRIM-BNI 12" Round Brushed Nickel	SLDSKSQ-12-TRIM-BNI 12" Square Brushed Nickel		

Specs and model numbers are subject to change with or without notice.

# SlimLine Surface


J-Box or E26

## FEATURES


5-CCT or 3-CCT  
Selectable

Suitable for  
Wet Locations

Super Slim Profile

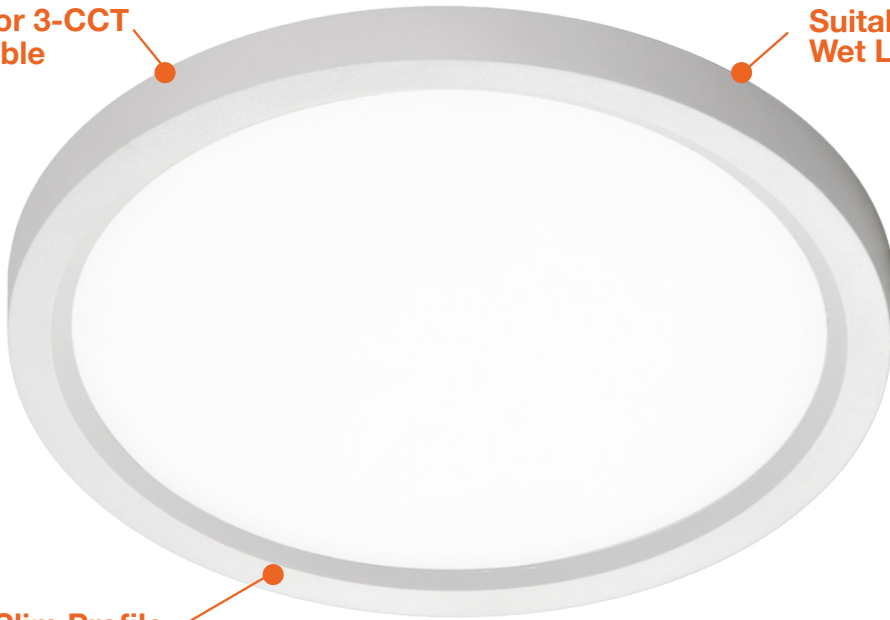

5"



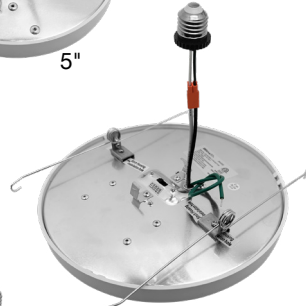


Shown with E26 Base




12"/15"/19"


## DIMENSIONS

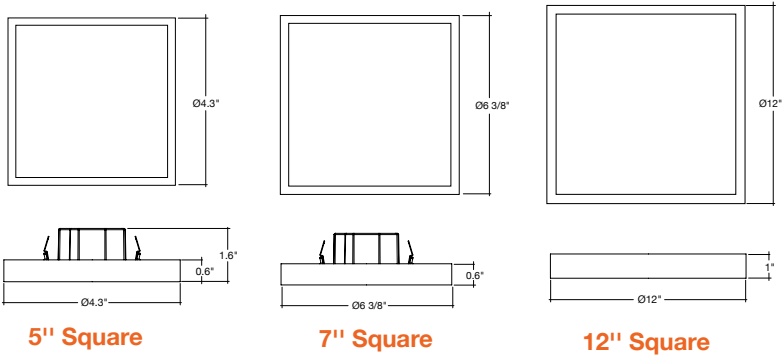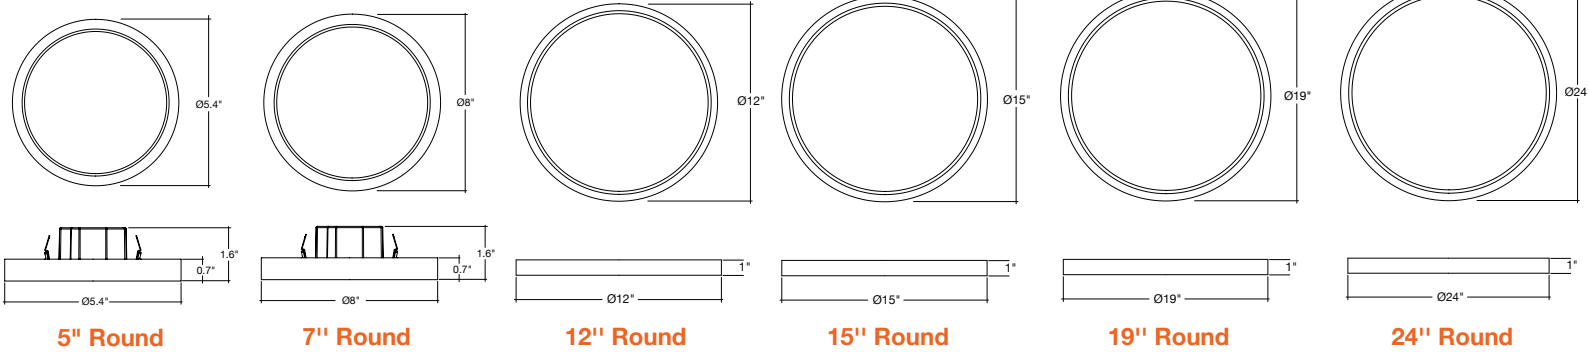


SLDSKR-7-EMB-UNV

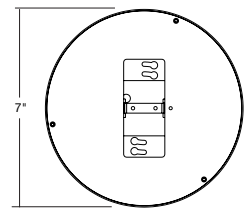

SLDSKR-7-EMB-EMPTY-UNV




SLDSKR-12-EMB-UNV



SLDSKR-12-EMB-EMPTY-UNV

## CLIP-ON TRIMS - 5" / 7" / 12"

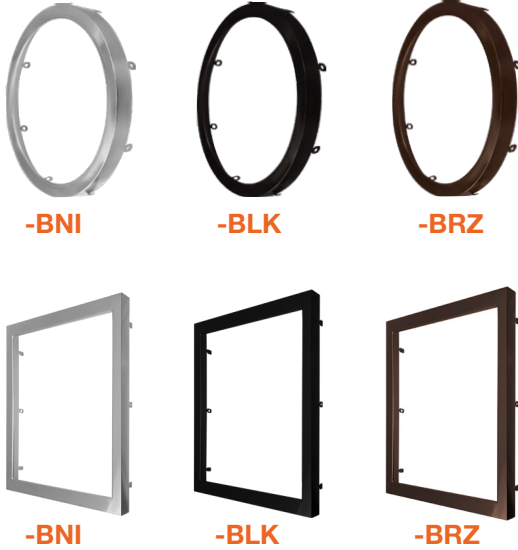

## ACCESSORIES



SLDSKR-7-EMB-UNV  
SLDSKR-12-EMB-UNV

SLDSKR-7-EMB-EMPTY-UNV  
SLDSKR-12-EMB-EMPTY-UNV



STM-JBX-6-WH  
STM-JBX-6-BLK

## SURFACE MOUNTS

Model	Voltage	Watts	Lumens	Color	CRI
LED-SLDSKR-5-10W-30K	120V	10w	650	3000k	>90
LED-SLDSKR-5-10W-5CCT-WH	120V	10w	650	27/30/35/40/50k	>90
LED-SLDSKR-7-15W-30K	120V	15w	1,000	3000k	>90
LED-SLDSKR-7-15W-5CCT-WH	120V	15w	1,000	27/30/35/40/50k	>90
LED-SLDSKR-12-22W-5CCT-WH	120V	22w	1,450	27/30/35/40/50k	>90
LED-SLDSKR-12-24W-5CCT-WH	120V	24w	1,800	27/30/35/40/50k	>90
LED-SLDSKR-15-30W-5CCT-WH	120V	30w	2,000	27/30/35/40/50k	>90
LED-SLDSKR-15-30W-5CCT-BLK	120V	30w	2,000	27/30/35/40/50k	>90
LED-SLDSKR-15-30W-5CCT-BN	120V	30w	2,000	27/30/35/40/50k	>90
LED-SLDSKR-19-35W-TRI-WH	120V	35w	2,200	30/40/50k	>90
LED-SLDSKR-19-35W-5CCT-WH	120V	35w	2,200	27/30/35/40/50k	>90
LED-SLDSKR-19-35W-5CCT-BLK	120V	35w	2,200	27/30/35/40/50k	>90
LED-SLDSKR-19-35W-5CCT-BN	120V	35w	2,200	27/30/35/40/50k	>90

## FIXTURE, TRIM, & ACCESSORY

Trim Model	Description
SLDSKR-5-TRIM-BLK	Black 5" Round Trim
SLDSKR-5-TRIM-BRZ	Bronze 5" Round Trim
SLDSKR-5-TRIM-BNI	Brushed Nickel 5" Round Trim
SLDSKR-7-TRIM-BLK	Black 7" Round Trim
SLDSKR-7-TRIM-BRZ	Bronze 7" Round Trim
SLDSKR-7-TRIM-BNI	Brushed Nickel 7" Round Trim
SLDSKR-12-TRIM-BLK	Black 12" Round Trim
SLDSKR-12-TRIM-BRZ	Bronze 12" Round Trim
SLDSKR-12-TRIM-BNI	Brushed Nickel 12" Round Trim
SLDSKSQ-5-TRIM-BLK	Black 5" Square Trim
SLDSKSQ-5-TRIM-BRZ	Bronze 5" Square Trim
SLDSKSQ-5-TRIM-BNI	Brushed Nickel 5" Square Trim
SLDSKSQ-7-TRIM-BLK	Black 7" Square Trim
SLDSKSQ-7-TRIM-BRZ	Bronze 7" Square Trim
SLDSKSQ-7-TRIM-BNI	Brushed Nickel 7" Square Trim
SLDSKSQ-12-TRIM-BLK	Black 12" Square Trim
SLDSKSQ-12-TRIM-BRZ	Bronze 12" Square Trim
SLDSKSQ-12-TRIM-BNI	Brushed Nickel 12" Square Trim

## SURFACE MOUNTS

Accessory Model	Description
SLDSKR-7-EMB-UNV	Surface mount pancake EMB
SLDSKR-7-EMB-EMPTY-UNV	Empty surface mount pancake EMB
SLDSKR-12-EMB-UNV	Surface mount pancake EMB
SLDSKR-12-EMB-EMPTY-UNV	Empty surface mount pancake EMB

## PENDANT STEM MOUNT

Accessory Model	Description
STM-JBX-6-WH	6' Stem Mount (Adjustable length) White Finish
STM-JBX-6-BLK	6' Stem Mount (Adjustable length) Black Finish

## TESTED COMPATIBLE DIMMERS

Other dimmers may be compatible but have not been tested. Please contact us for more information.

Lutron	Lutron
PD-6WCL	MACL-153M
DVCL-153P	LECL-153P
CTCL-153P	

Model	Voltage	Watts	Lumens	Color	CRI
LED-SLDSKSQ-5-10W-TRI	120V	10w	650	30/40/50k	>90
LED-SLDSKSQ-5-10W-5CCT-WH	120V	10w	650	27/30/35/40/50k	>90
LED-SLDSKSQ-7-15W-TRI	120V	15w	1,000	30/40/50k	>90
LED-SLDSKSQ-7-15W-5CCT-WH	120V	15w	1,000	27/30/35/40/50k	>90
LED-SLDSKSQ-12-22W-5CCT-WH	120V	22w	1,450	27/30/35/40/50k	>90