

4' T5 Triple Fit Tubes

Single CCT



Tubes



Detail Specifications:

- IP Rating: Damp Location
- Beam Angle: 300°
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 130° F
- Lens: Frosted lens with film protectant for extra shatter protection (food industry OK)
- Average life (L70) of 70,000 hours

Applications:

- Fluorescent Retrofitting
- Walkways & Pathways
- High Bay Fixtures
- T5 Strip Fixtures
- Warehouse Lighting
- Commercial and Industrial

Product Information:

- Standard size of fluorescent versions
- Suitable for use in existing fixtures
- Approved for use in enclosed fixtures
- Select-n-Switch Technology
- Instant-On to full brightness

Driver Options:

- UNV: 120-277V Non-Dimmable
- Built in 2.5Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

Mounting & Installation:

- Rewire (single or double ended connection)
- Use with existing ballast (see ballast compatibility chart)

Certifications:

- UL Listed for USA and CA
- DLC Listed
- NSF Rated
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series

LED-T5-DF-4FT-24W-40K

4FT 3,200LM 4000K


LED-T5-DF-4FT-24W-50K

4FT 3,200LM 5000K


4' T5 Triple Fit Tubes

Single CCT

FEATURES

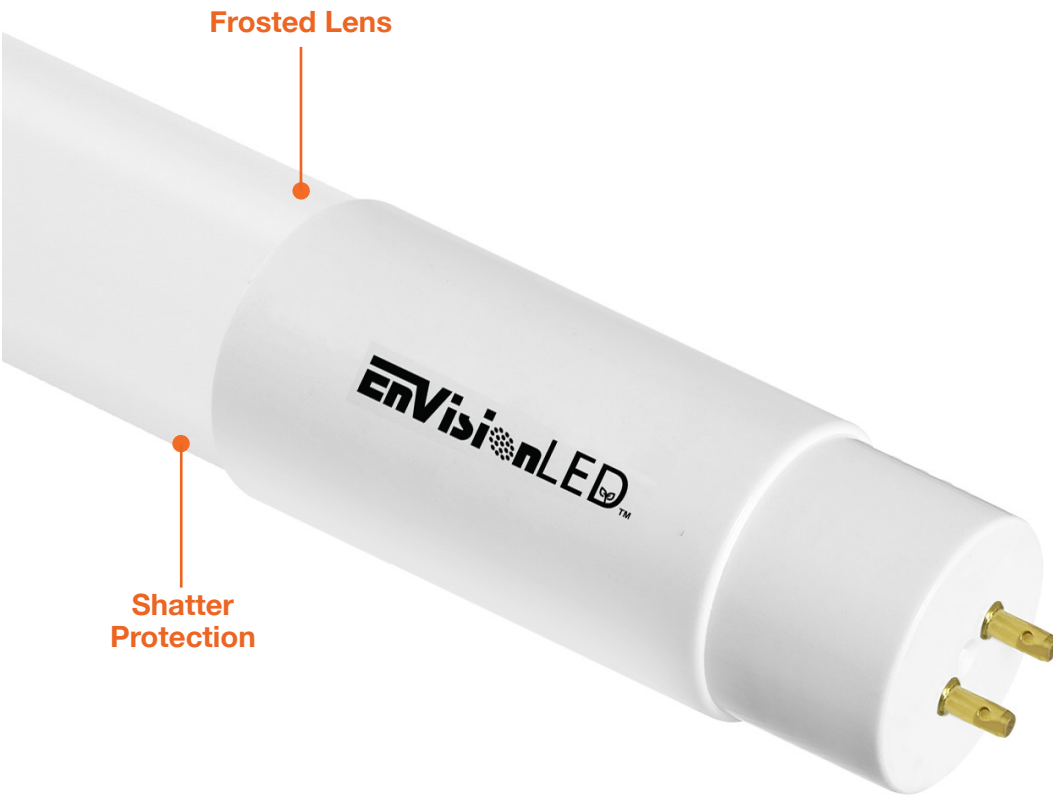

DIMENSIONS

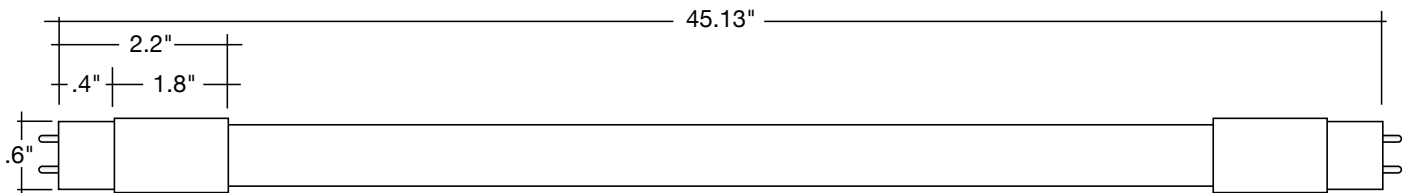

Specs and model numbers are subject to change with or without notice.

4' T5 Triple Fit Tubes

Single CCT

| Model | Voltage | Watts | Lumens | Color | CRI |
|-----------------------|----------|-------|--------|-------|-----|
| LED-T5-DF-4FT-24W-40K | 120-277V | 24w | 3,200 | 4000k | >80 |
| LED-T5-DF-4FT-24W-50K | 120-277V | 24w | 3,200 | 5000k | >80 |

Ballast Compatibility

| Brand | Model No. |
|-----------------|--------------------------|
| KEYSTONE | KTEB-228-1-TP-PH-SL/B |
| KEYSTONE | KTEB-113-1-TP-SN-MB/A |
| KEYSTONE | CAT.NO.KTEB-221PS-1-TP/A |
| PROLINE (GE) | GE28T5/2-120-RES |
| PROLINE (GE) | GE21T5-120-RES |
| PROLINE (GE) | GE28T5/2-120-RESL |
| OSRAM | QHE 2X54T5HO/UNV PSN |
| OSRAM | QHE 2X28T5/UNV PSN |
| ESPEN | VE454MVHRP11088 |
| ESPEN | VE254MVHRP11101 |
| ACT | ACT4M54PSUNV |
| HOWARD | EP2/54HO/PRS/MV/W/MC |
| PLUSRITE | BAF254PS/MV |
| PLUSRITE | BAF454PS/MV |
| ROBERTSON | PSU228T51203P20210 |
| ACCUSTART | B254PUNV-D |
| PHILIPS-ADVANCE | ICN-2S54-T |
| PHILIPS-ADVANCE | ICN-2S54-90C-T |
| PHILIPS-ADVANCE | ICN-4S54-90C-2LS-G |