

4' T5 Triple Fit Tubes

Single CCT



Tubes



Detail Specifications:

- IP Rating: Damp Location
- Beam Angle: 300°
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 130° F
- Lens: Frosted lens with film protectant for extra shatter protection (food industry OK)
- Average life (L70) of 70,000 hours

Applications:

- Fluorescent Retrofitting
- Walkways & Pathways
- High Bay Fixtures
- T5 Strip Fixtures
- Warehouse Lighting
- Commercial and Industrial

Product Information:

- Standard size of fluorescent versions
- Suitable for use in existing fixtures
- Approved for use in enclosed fixtures
- Select-n-Switch Technology
- Instant-On to full brightness

Driver Options:

- UNV: 120-277V Non-Dimmable
- Built in 2.5Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

Mounting & Installation:

- Rewire (single or double ended connection)
- Use with existing ballast (see ballast compatibility chart)

Certifications:

- UL Listed for USA and CA
- DLC Listed
- NSF Rated
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series

LED-T5-DF-4FT-24W-40K

4FT 3,200LM 4000K


LED-T5-DF-4FT-24W-50K

4FT 3,200LM 5000K


4' T5 Triple Fit Tubes

Single CCT

FEATURES

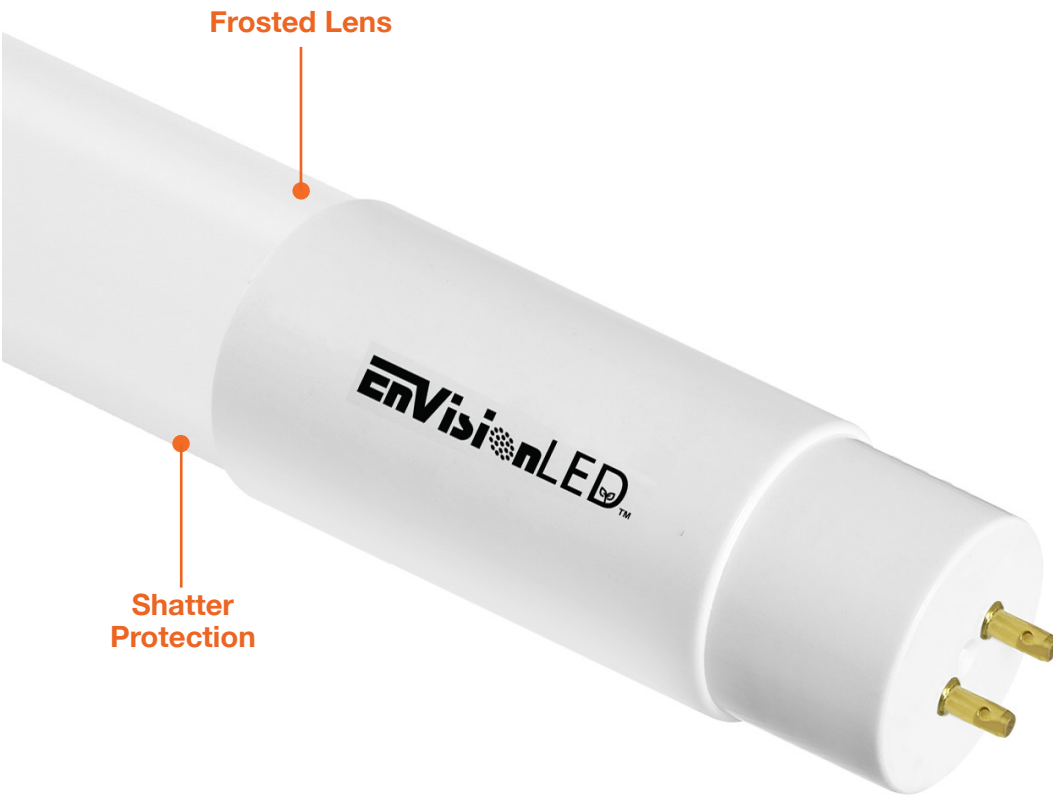

DIMENSIONS

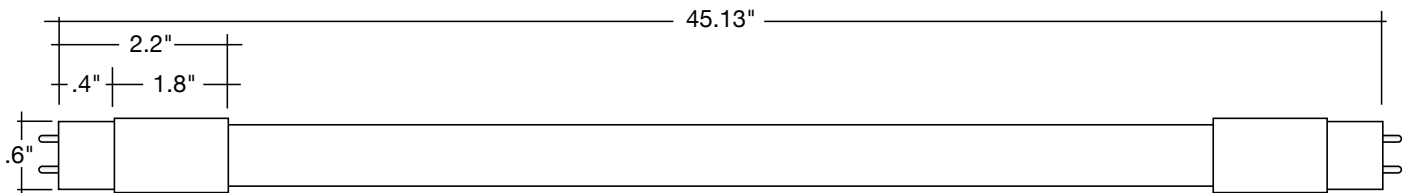

4' T5 Triple Fit Tubes

Single CCT

Model	Voltage	Watts	Lumens	Color	CRI
LED-T5-DF-4FT-24W-40K	120-277V	24w	3,200	4000k	>80
LED-T5-DF-4FT-24W-50K	120-277V	24w	3,200	5000k	>80

Ballast Compatibility

Brand	Model No.
KEYSTONE	KTEB-228-1-TP-PH-SL/B
KEYSTONE	KTEB-113-1-TP-SN-MB/A
KEYSTONE	CAT.NO.KTEB-221PS-1-TP/A
PROLINE (GE)	GE28T5/2-120-RES
PROLINE (GE)	GE21T5-120-RES
PROLINE (GE)	GE28T5/2-120-RESL
OSRAM	QHE 2X54T5HO/UNV PSN
OSRAM	QHE 2X28T5/UNV PSN
ESPEN	VE454MVHRP11088
ESPEN	VE254MVHRP11101
ACT	ACT4M54PSUNV
HOWARD	EP2/54HO/PRS/MV/W/MC
PLUSRITE	BAF254PS/MV
PLUSRITE	BAF454PS/MV
ROBERTSON	PSU228T51203P20210
ACCUSTART	B254PUNV-D
PHILIPS-ADVANCE	ICN-2S54-T
PHILIPS-ADVANCE	ICN-2S54-90C-T
PHILIPS-ADVANCE	ICN-4S54-90C-2LS-G