



2' / 3' / 4' T8 Triple Fit Tubes

5-CCT Selectable



Detail Specifications:

- IP Rating: Damp Location
- Beam Angle: 300°
- 5-CCT: 30/35/40/50/65K Selectable
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 130° F
- Lens: Frosted lens with film protectant for extra shatter protection (food industry OK)
- Average life (L70) of 70,000 hours

Applications:

- Fluorescent Retrofitting
- Walkways & Pathways
- 2x2 or 2x4 Fixtures
- T8 Strip Fixtures
- Outdoor Corridors
- General Outdoor Lighting
- Residential, Commercial and Industrial

Product Information:

- Standard size of fluorescent versions
- Suitable for use in existing fixtures
- Approved for use in enclosed fixtures
- Select-n-Switch Technology
- Instant-On to full brightness

Driver Options:

- UNV: 120-277V Non-Dimmable
- Built in 2.5Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

Mounting & Installation:

- Rewire (single or double ended connection)
- Use with existing ballast (see ballast compatibility chart)

Certifications:

- UL Listed for USA and CA
- DLC Listed
- NSF Rated
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series

LED-T8-DF-GL-2FT-8W-5CCT
 LED-T8-DF-GL-3FT-12W-5CCT
 LED-T8-DF-GL-4FT-15W-5CCT
 LED-T8-DF-GL-4FT-18W-5CCT

Accessories

Fixture Options

T8-4FT-2LAMP-STRIP
 4ft 2-Lamp Strip (Single ended wiring)
T8-4FT-2/1L-STRIP
 4 FT T8 1 or 2-Lamp Strip Fixture (Double Sided Connection)
T8-8FT-4/2L-STRIP
 8 FT T8 2 or 4-Lamp Strip Fixture (Double Sided Connection)
T8-4FT-RF
 4FT Symetric White Reflector

End Cap


R17D-EC
 Bi-pin to R17 end cap converter

Specs and model numbers are subject to change with or without notice.

2' / 3' / 4' T8 Triple Fit Tubes


5-CCT Selectable

FEATURES

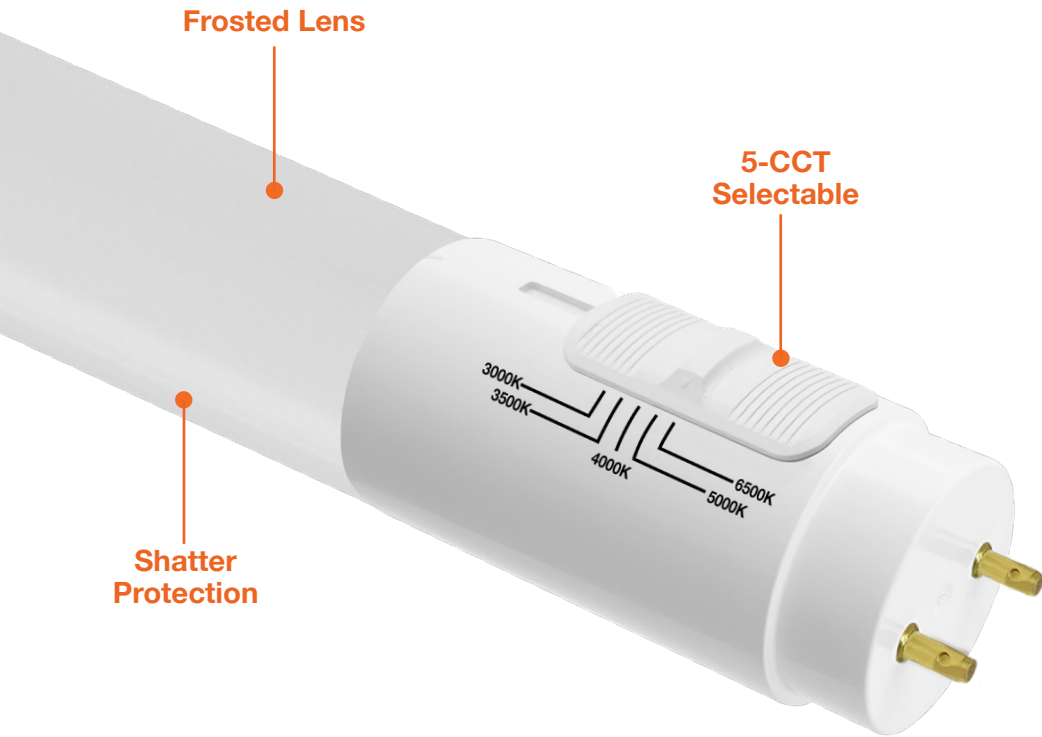

DIMENSIONS

| Size | A | B | C |
|------|--------|--------|--------|
| 2ft | 23.74" | 23.19" | 22.52" |
| 3ft | 35.75" | 35.2" | 34.53" |
| 4ft | 47.72" | 47.17" | 46.5" |

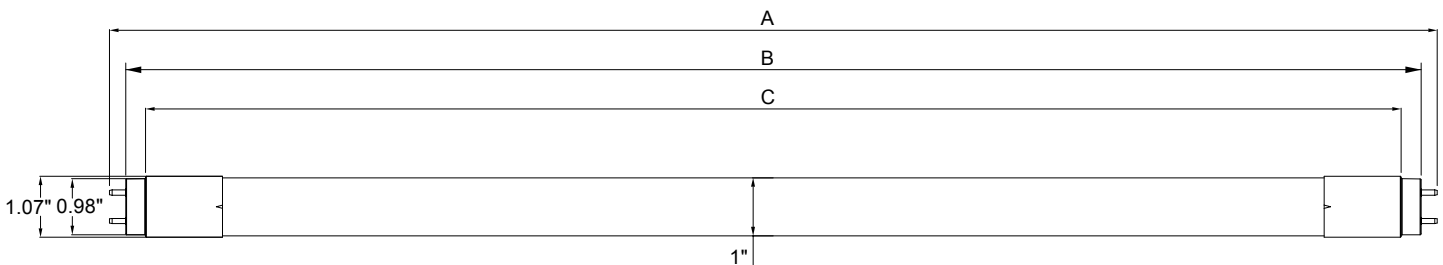


2' / 3' / 4' T8 Triple Fit Tubes 5-CCT Selectable

TM


ACCESSORIES



T8-4FT-2LAMP-STRIP
T8-4FT-2/1L-STRIP
T8-8FT-4/2L-STRIP

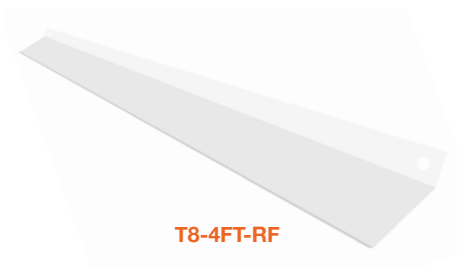

T8-4FT-RF



R17D-EC

| Model | Voltage | Watts | Lumens | Color | CRI |
|---------------------------|----------|-------|--------|-----------------|-----|
| LED-T8-DF-GL-2FT-8W-5CCT | 120-277V | 8w | 1,000 | 30/35/40/50/65k | >80 |
| LED-T8-DF-GL-3FT-12W-5CCT | 120-277V | 12w | 1,500 | 30/35/40/50/65k | >80 |
| LED-T8-DF-GL-4FT-15W-5CCT | 120-277V | 15w | 1,950 | 30/35/40/50/65k | >80 |
| LED-T8-DF-GL-4FT-18W-5CCT | 120-277V | 18w | 2,200 | 30/35/40/50/65k | >80 |

STRIPS

| Model | Description |
|--------------------|---|
| T8-4FT-2LAMP-STRIP | 4ft 2-Lamp Strip (Single ended wiring) |
| T8-4FT-2/1L-STRIP | 4 FT T8 1 or 2-Lamp Strip Fixture (Double Sided Connection) |
| T8-8FT-4/2L-STRIP | 8 FT T8 2 or 4-Lamp Strip Fixture (Double Sided Connection) |
| T8-4FT-RF | 4FT Symetric White Reflector |

END CAPS

| Model | Description |
|---------|---------------------------------|
| R17D-EC | Bi-pin to R17 end cap converter |