



# 2' / 3' / 4' T8 Triple Fit Tubes

## 5-CCT Selectable



### Detail Specifications:

- IP Rating: Damp Location
- Beam Angle: 300°
- 5-CCT: 30/35/40/50/65K Selectable
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 130° F
- Lens: Frosted lens with film protectant for extra shatter protection (food industry OK)
- Average life (L70) of 70,000 hours

### Applications:

- Fluorescent Retrofitting
- Walkways & Pathways
- 2x2 or 2x4 Fixtures
- T8 Strip Fixtures
- Outdoor Corridors
- General Outdoor Lighting
- Residential, Commercial and Industrial

### Product Information:

- Standard size of fluorescent versions
- Suitable for use in existing fixtures
- Approved for use in enclosed fixtures
- Select-n-Switch Technology
- Instant-On to full brightness

### Driver Options:

- UNV: 120-277V Non-Dimmable
- Built in 2.5Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

### Mounting & Installation:

- Rewire (single or double ended connection)
- Use with existing ballast (see ballast compatibility chart)

### Certifications:

- UL Listed for USA and CA
- DLC Listed
- NSF Rated
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

#### Series

LED-T8-DF-GL-2FT-8W-5CCT  
 LED-T8-DF-GL-3FT-12W-5CCT  
 LED-T8-DF-GL-4FT-15W-5CCT  
 LED-T8-DF-GL-4FT-18W-5CCT

#### Accessories

##### Fixture Options

**T8-4FT-2LAMP-STRIP**  
 4ft 2-Lamp Strip (Single ended wiring)  
**T8-4FT-2/1L-STRIP**  
 4 FT T8 1 or 2-Lamp Strip Fixture (Double Sided Connection)  
**T8-8FT-4/2L-STRIP**  
 8 FT T8 2 or 4-Lamp Strip Fixture (Double Sided Connection)  
**T8-4FT-RF**  
 4FT Symetric White Reflector

##### End Cap


**R17D-EC**  
 Bi-pin to R17 end cap converter

Specs and model numbers are subject to change with or without notice.

# 2' / 3' / 4' T8 Triple Fit Tubes


## 5-CCT Selectable

### FEATURES

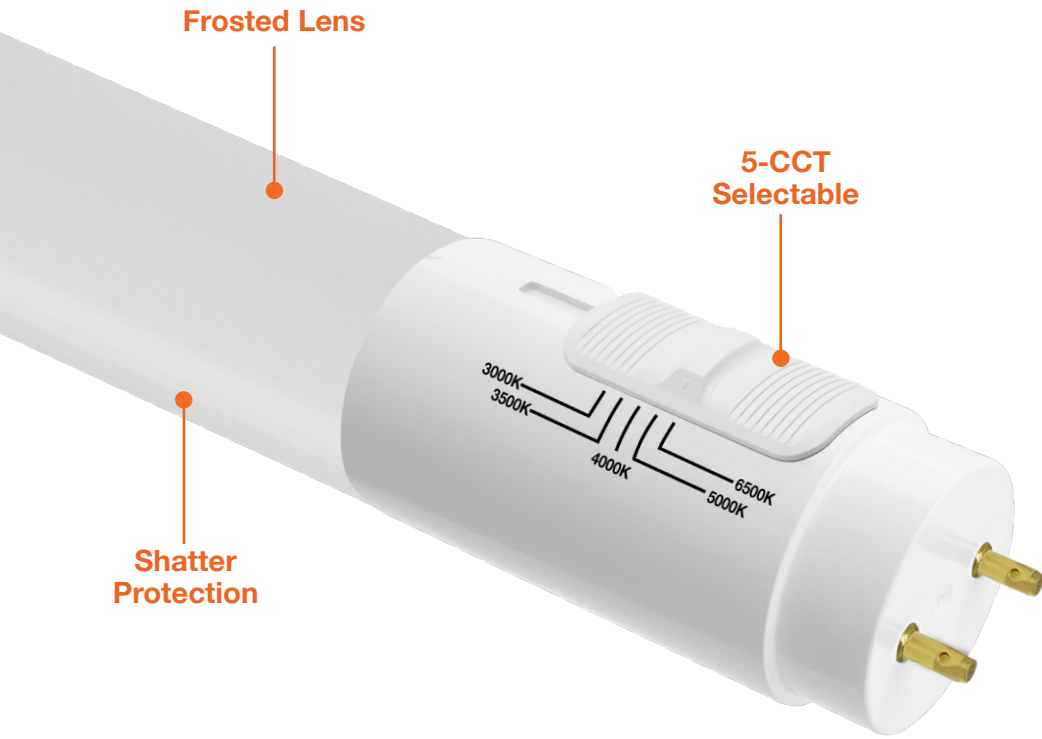

### DIMENSIONS

Size	A	B	C
2ft	23.74"	23.19"	22.52"
3ft	35.75"	35.2"	34.53"
4ft	47.72"	47.17"	46.5"

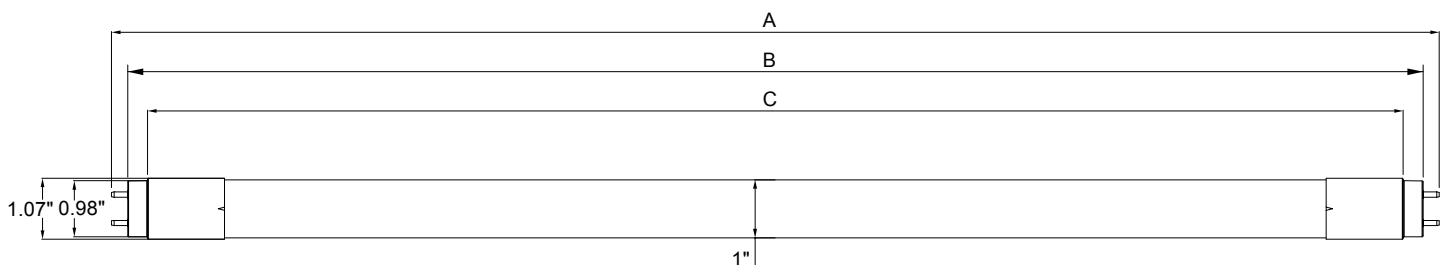


# 2' / 3' / 4' T8 Triple Fit Tubes

## 5-CCT Selectable


### ACCESSORIES



T8-4FT-2LAMP-STRIP  
T8-4FT-2/1L-STRIP  
T8-8FT-4/2L-STRIP

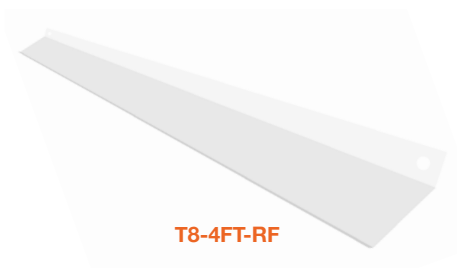

T8-4FT-RF



R17D-EC

Model	Voltage	Watts	Lumens	Color	CRI
LED-T8-DF-GL-2FT-8W-5CCT	120-277V	8w	1,000	30/35/40/50/65k	>80
LED-T8-DF-GL-3FT-12W-5CCT	120-277V	12w	1,500	30/35/40/50/65k	>80
LED-T8-DF-GL-4FT-15W-5CCT	120-277V	15w	1,950	30/35/40/50/65k	>80
LED-T8-DF-GL-4FT-18W-5CCT	120-277V	18w	2,200	30/35/40/50/65k	>80

### STRIPS

Model	Description
T8-4FT-2LAMP-STRIP	4ft 2-Lamp Strip (Single ended wiring)
T8-4FT-2/1L-STRIP	4 FT T8 1 or 2-Lamp Strip Fixture (Double Sided Connection)
T8-8FT-4/2L-STRIP	8 FT T8 2 or 4-Lamp Strip Fixture (Double Sided Connection)
T8-4FT-RF	4FT Symetric White Reflector

### END CAPS

Model	Description
R17D-EC	Bi-pin to R17 end cap converter