

2'/3'/4' T8 Triple Fit Tubes

3-CCT Selectable

Tubes



Detail Specifications:

- IP Rating: Damp Location
- Beam Angle: 300°
- CCT: 35/40/50K Selectable
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 130° F
- Lens: Frosted lens with film protectant for extra shatter protection (food industry OK)
- Average life (L70) of 70,000 hours

Applications:

- Fluorescent Retrofitting
- Walkways & Pathways
- 2x2 or 2x4 Fixtures
- T8 Strip Fixtures
- Outdoor Corridors
- General Outdoor Lighting
- Residential, Commercial and Industrial

Product Information:

- Standard size of fluorescent versions
- Suitable for use in existing fixtures
- Approved for use in enclosed fixtures
- Select-n-Switch Technology
- Instant-On to full brightness

Driver Options:

- UNV: 120-277V Non-Dimmable
- Built in 2.5Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

Mounting & Installation:

- Rewire (single or double ended connection)
- Use with existing ballast (see ballast compatibility chart)

Certifications:

- UL Listed for USA and CA
- DLC Listed
- NSF Rated
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series

LED-T8-DF-GL-2FT-8W-CTRI
LED-T8-DF-GL-3FT-12W-CTRI
LED-T8-DF-GL-4FT-15W-CTRI
LED-T8-DF-GL-4FT-18W-CTRI

Optional Accessories (Order Separately)


Fixture Options

T8-4FT-2LAMP-STRIP
4ft 2-Lamp Strip
(Single ended wiring)

2'3'4' T8 Triple Fit Tubes


3-CCT Selectable

FEATURES

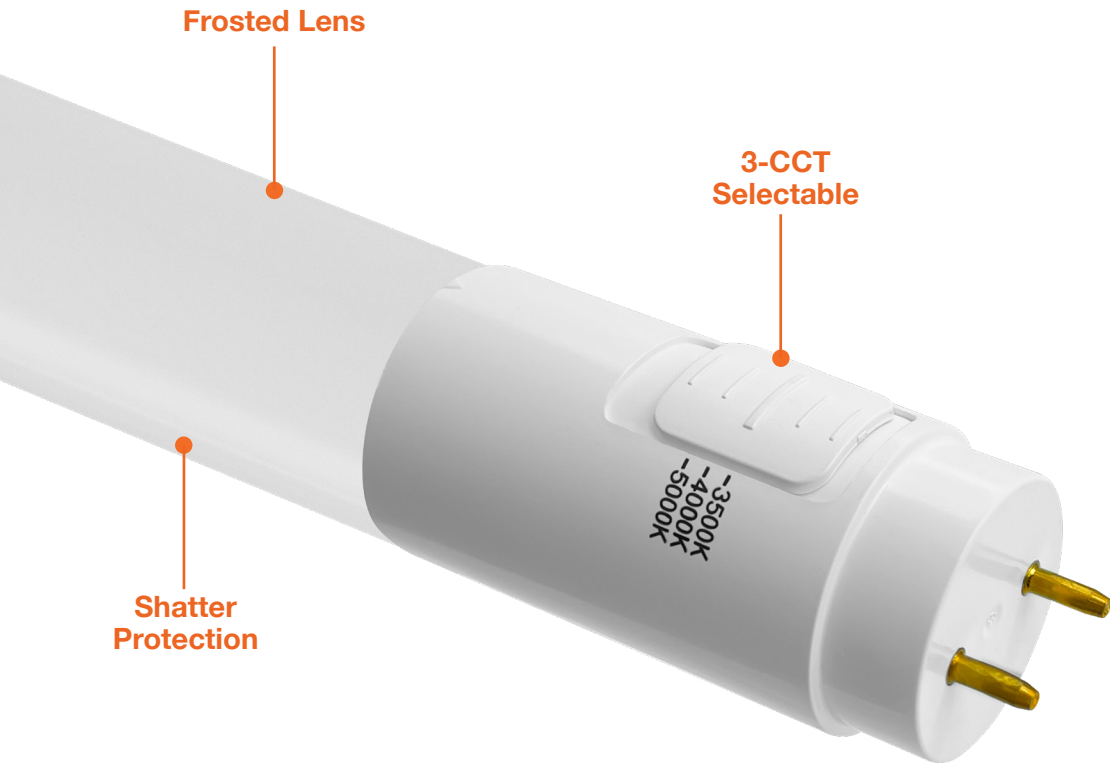

DIMENSIONS

Size	A	B	C
2ft	23.74"	23.19"	22.52"
3ft	35.75"	35.2"	34.53"
4ft	47.72"	47.17"	46.5"

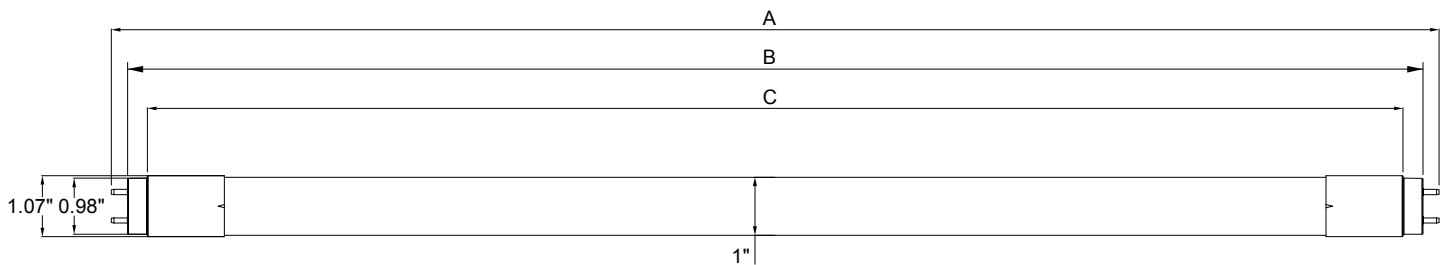

2'3'4' T8 Triple Fit Tubes

3-CCT Selectable

Model	Voltage	Watts	Lumens	Color	CRI
LED-T8-DF-GL-2FT-8W-CTRI	120-277V	8w	1,000	35/40/50k	>80
LED-T8-DF-GL-3FT-12W-CTRI	120-277V	12w	1,500	35/40/50k	>80
LED-T8-DF-GL-4FT-15W-CTRI	120-277V	15w	1,950	35/40/50k	>80
LED-T8-DF-GL-4FT-18W-CTRI	120-277V	18w	2,200	35/40/50k	>80



LAMP STRIP FIXTURE

Model	Description
T8-4FT-2LAMP-STRIP	4 foot- 2 Lamp LED T8 Strip Fixture