

# 2'/3'/4' T8 Triple Fit Tubes

## Single CCT



Tubes



### Detail Specifications:

- IP Rating: Damp Location
- Beam Angle: 300°
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 130° F
- Lens: Frosted lens with film protectant for extra shatter protection (food industry OK)
- Average life (L70) of 70,000 hours

### Applications:

- Fluorescent Retrofitting
- Walkways & Pathways
- 2x2 or 2x4 Fixtures
- T8 Strip Fixtures
- Outdoor Corridors
- General Outdoor Lighting
- Residential, Commercial and Industrial

### Product Information:

- Standard size of fluorescent versions
- Suitable for use in existing fixtures
- Approved for use in enclosed fixtures
- Select-n-Switch Technology
- Instant-On to full brightness

### Driver Options:

- UNV: 120-277V Non-Dimmable
- Built in 2.5Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

### Mounting & Installation:

- Rewire (single or double ended connection)
- Use with existing ballast (see ballast compatibility chart)

### Certifications:

- UL Listed for USA and CA
- DLC Listed
- NSF Rated
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

#### Series

LED-T8-DF-GL-2FT-8W-30K  
LED-T8-DF-GL-2FT-8W-35K  
LED-T8-DF-GL-3FT-12W-30K  
LED-T8-DF-GL-3FT-12W-35K  
LED-T8-DF-GL-4FT-15W-35K  
LED-T8-DF-GL-4FT-15W-40K  
LED-T8-DF-GL-4FT-15W-50K  
LED-T8-DF-GL-4FT-18W-30K  
LED-T8-DF-GL-4FT-18W-35K  
LED-T8-DF-GL-4FT-18W-40K  
LED-T8-DF-GL-4FT-18W-50K  
LED-T8-DF-GL-4FT-18W-65K

#### Optional Accessories (Order Separately)

##### Fixture Options


#### T8-4FT-2LAMP-STRIP

4ft 2-Lamp Strip  
(Single ended wiring)

# 2'/3'/4' T8 Triple Fit Tubes


Single CCT

## FEATURES

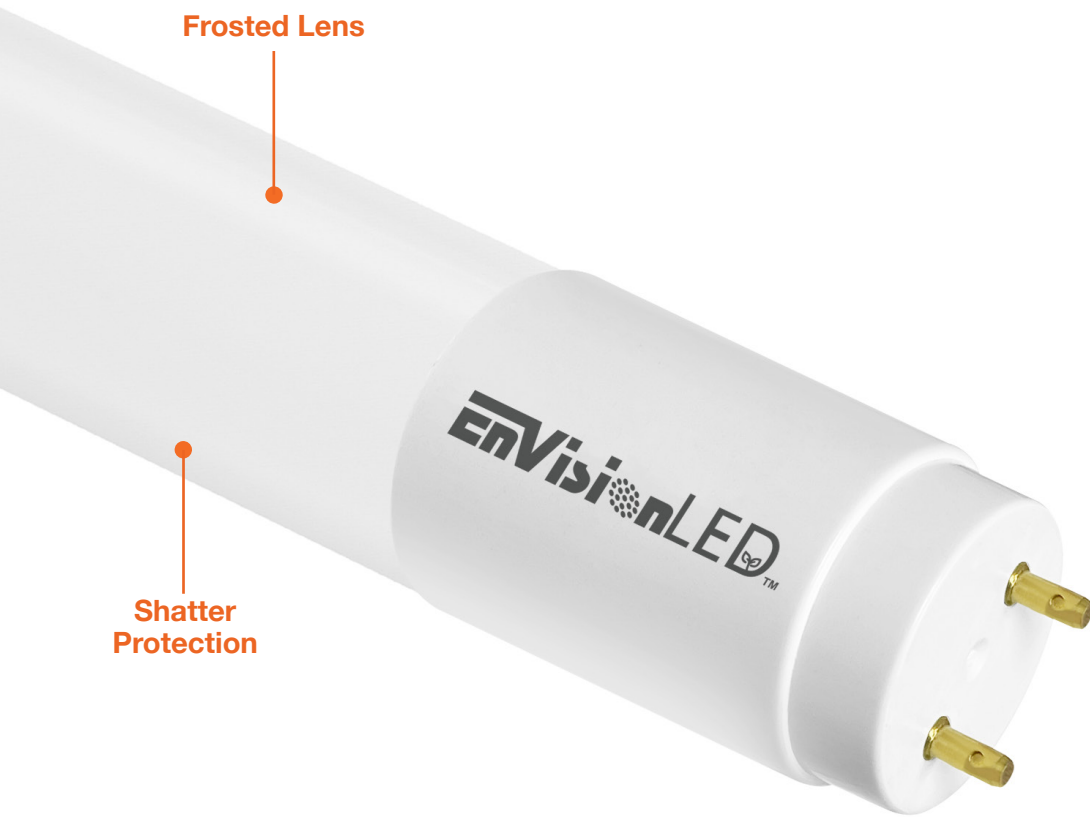

## DIMENSIONS

Size	A	B	C
2ft	23.74"	23.19"	22.52"
3ft	35.75"	35.2"	34.53"
4ft	47.72"	47.17"	46.5"

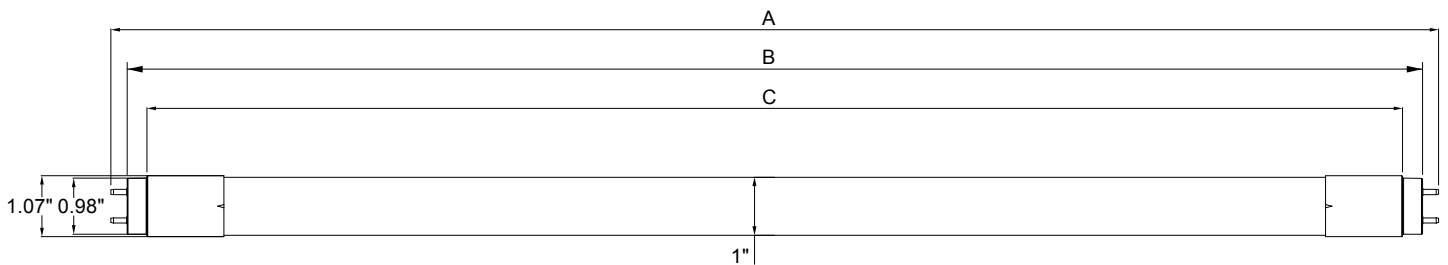

# 2'/'3'/'4' T8 Triple Fit Tubes

## Single CCT

### ACCESSORIES

Model	Voltage	Watts	Lumens	Color	CRI
LED-T8-DF-GL-2FT-8W-30K	120-277V	8w	1,000	3000k	>80
LED-T8-DF-GL-2FT-8W-35K	120-277V	8w	1,000	3500k	>80
LED-T8-DF-GL-3FT-12W-30K	120-277V	12w	1,500	3000k	>80
LED-T8-DF-GL-3FT-12W-35K	120-277V	12w	1,500	3500k	>80
LED-T8-DF-GL-4FT-15W-35K	120-277V	15w	1,950	3500k	>80
LED-T8-DF-GL-4FT-15W-40K	120-277V	15w	1,950	4000k	>80
LED-T8-DF-GL-4FT-15W-50K	120-277V	15w	1,950	5000k	>80
LED-T8-DF-GL-4FT-18W-30K	120-277V	18w	2,200	3000k	>80
LED-T8-DF-GL-4FT-18W-35K	120-277V	18w	2,200	3500k	>80
LED-T8-DF-GL-4FT-18W-40K	120-277V	18w	2,200	4000k	>80
LED-T8-DF-GL-4FT-18W-50K	120-277V	18w	2,200	5000k	>80
LED-T8-DF-GL-4FT-18W-65K	120-277V	18w	2,200	6500k	>80




### LAMP STRIP FIXTURE

Model	Description
T8-4FT-2LAMP-STRIP	4 foot- 2 Lamp LED T8 Strip Fixture

### T8 WIRING GUIDE

#### AC 120 ~ 277V, 3 Operating Modes

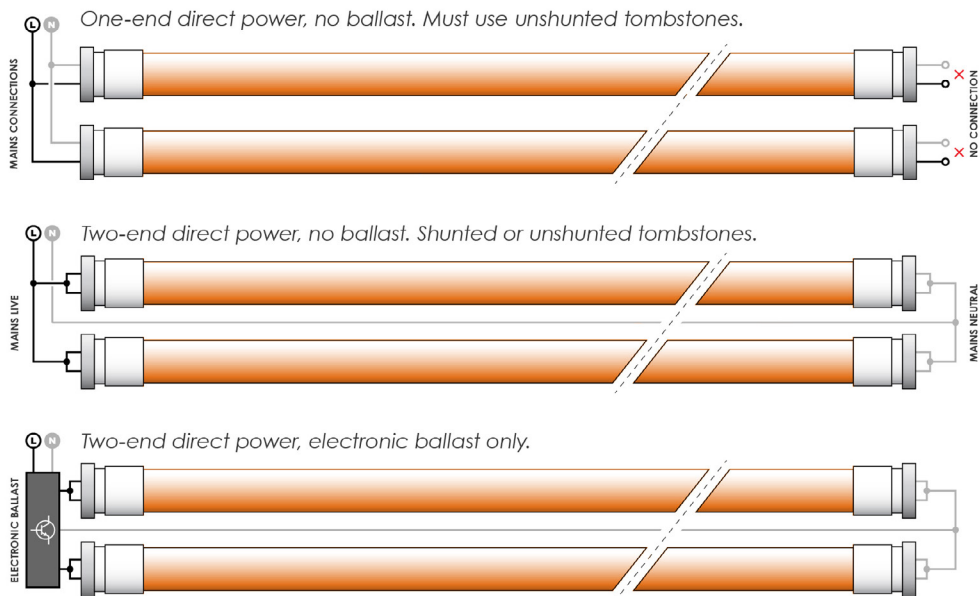

# 2'3/4' T8 Triple Fit Tubes

## Single CCT

### Ballast Compatibility

Brand	Model No.	Lamps
GE	GE132MAX-H/ULtra	1-lamp
GE	GE132MAXP-L/ULTRA	1-lamp
GE	GE232-120RES-B	2-lamp
GE	GE232-MV-N	2-lamp
GE	GE232-MVPS-N	2-lamp
GE	GE232-MV-PS-H	2-lamp
GE	GE232MAX-G-N	2-lamp
GE	GE332MAX-G-N	3-lamp
GE	GE432MAXP-H/ULTRA	4-lamp
GE	GE432-120-RES	4-lamp
GE	GE432MAX-G-N	4-lamp
GE	GE432MAXG-N-DIYL	4-lamp
GE	GE432-120RES-B	4-lamp
PHILIPS-ADVANCE	ICN-1P32-N	1-lamp
PHILIPS-ADVANCE	IOPA-1P32-N	1-lamp
PHILIPS-ADVANCE	QHE2X32T8/UNV-PSN-MC	2-lamp
PHILIPS-ADVANCE	ICN-2P32-N	2-lamp
PHILIPS-ADVANCE	REB-2P32-N	2-lamp
PHILIPS-ADVANCE	IOP-2P32-N	2-lamp
PHILIPS-ADVANCE	IOPA-3P32-N	3-lamp
PHILIPS-ADVANCE	IOPA-3P32-LW-N	3-lamp
PHILIPS-ADVANCE	IOP-4PSP32-SC	4-lamp
PHILIPS-ADVANCE	IOPA-4P32-N	4-lamp
PHILIPS-ADVANCE	RED-4P32-SC	4-lamp
PHILIPS-ADVANCE	VEL-4P32-SC	4-lamp
HOWARD INDUSTRIES	EP2/32IS/MV/MC/HE	2-lamp
HOWARD INDUSTRIES	EP232IS/MV/HE	2-lamp
HOWARD INDUSTRIES	EPL2/32IS/MV/MC/HE	2-lamp
HOWARD INDUSTRIES	EP2/32IS/MV/MC/HE	2-lamp
HOWARD INDUSTRIES	EPL4/32IS/MV/SC/HE	3-lamp
HOWARD INDUSTRIES	EP332IS/MV/HE	3-lamp
HOWARD INDUSTRIES	EP332IS/L/MV/HE	3-lamp
HOWARD INDUSTRIES	EP432IS/L/MV/HE	4-lamp
HOWARD INDUSTRIES	EP4/32IS/MV/MC/HE	4-lamp
HOWARD INDUSTRIES	EPH4/32IS/MV/SC/HE	4-lamp

Brand	Model No.	Lamps
ESPEN	VE2P32MVHIPLE	2-lamp
ESPEN	VE2P32MVHIPHE	2-lamp
ESPEN	VE2P32MVHPPE	2-lamp
ESPEN	VE2P32MVHIPE	2-lamp
ESPEN	VE3P32MVHIPHE	3-lamp
ESPEN	VE3P32MVHPPE	3-lamp
ESPEN	VE3P32MVHIPE	3-lamp
ESPEN	VE4P32MVHIPE	4-lamp
ESPEN	VE4P32MVHPPE	4-lamp
UNIVERSAL	B232IUNVHP-N	2-lamp
UNIVERSAL	B232/UNVHP-N	2-lamp
UNIVERSAL	B232PUNVHE-B	2-lamp
UNIVERSAL	B232/UNVEL-N	2-lamp
UNIVERSAL	B332/UNVHP-A	3-lamp
UNIVERSAL	B432IUNVHP-A	4-lamp
UNIVERSAL	B432PUMVHE-A	4-lamp
KEYSTONE	KTEB-232-UV-IS-N-P	2-lamp
KEYSTONE	KTEB-232RIS-1-TP-SL/J	2-lamp
KEYSTONE	KTEB-332-UV-IS-N-P	3-lamp
KEYSTONE	KTEB-432RIS-1-TP-SL	4-lamp
OSRAM SYLVANIA	QTP 2x32T8/UNV ISN-SC	2-lamp
OSRAM SYLVANIA	QHE2X32T8/UNV ISN-SC	2-lamp
OSRAM SYLVANIA	QTP 3x32T8-UNV ISN-SC	3-lamp
OSRAM SYLVANIA	QTP 4*32T8/UNV ISN-SC	4-lamp
OSRAM SYLVANIA	QHE4X32T8/UNV ISN-SC	4-lamp
DAMAR	1688B	2-lamp
DAMAR	1688D	2-lamp
DAMAR	3654C	3-lamp
ROBERTSON	ISU232T8120-3P20116	2-lamp
ROBERTSON	IEA432T8120N	4-lamp
TCP	E3P32ISUNVE	3-lamp
TCP	E4P32ISUNVHE	4-lamp
ACT	ACT4P32ISUNVE	4-lamp