
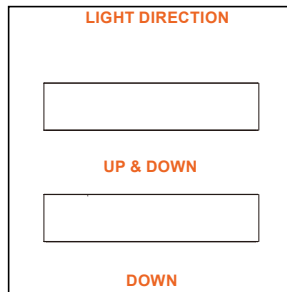


C-Line: Suspended Linear w/ Uplight

5-CCT + 3-Power Selectable

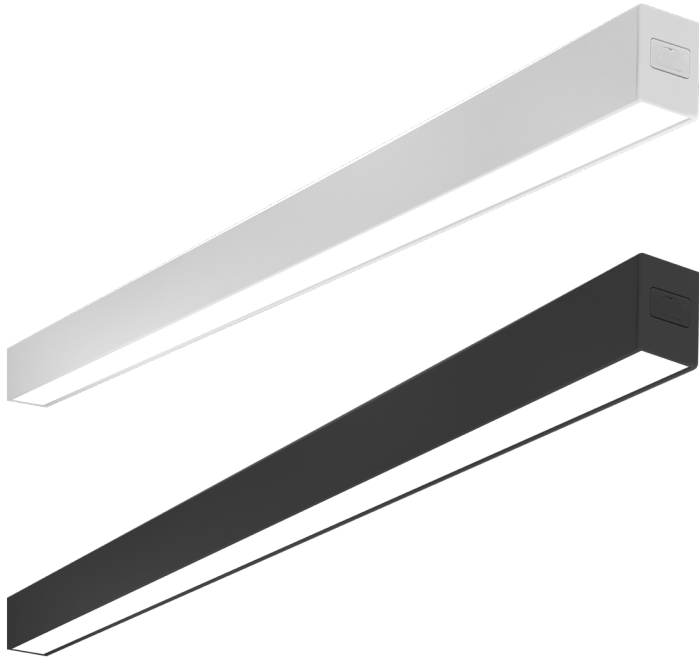

WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
15	1,875	30	3,750	60	7,500
20	2,500	40	5,000	80	10,000
25	3,125	50	6,250	100	12,500

Detail Specifications:

- Finish: White or Black
- IP Rating: Damp Location
- Beam Angle: 110°
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -4° - 122° F
- Lens: Acrylic Frosted Lens Standard: efficiently emits the light through a high-quality acrylic lens, spreading it evenly and without causing glare
- Average life (L70) of 50,000 hours

Applications:

- Stairwell & Hallways
- Utility & Storage
- Garage Structures
- Office and Meeting Rooms
- Retail
- Commercial and Industrial

Product Information:

- Construction: aluminum housing with frosted lens
- Selectable Up Light: 20/15/10/0%
- Up Light reduces the wattage of downlight (see chart below)
- Linkable connector for straight or 4-way available
- Does not require wiring, plug-and-play connectors
- Finished with corrosion free powder coating
- Select-n-Switch Technology: 5-CCT + 3-Power Selectable

Driver Options:

- Max Run: 600W off one power feed
- UNV: 100-277V, 0-10V Dimmable
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz
- 5-Power Selectable
- Flicker Free

Mounting & Installation:

- Canopy suspension kits available
- Optional joiners available to link fixtures

Certifications:

- UL Listed for USA and CA
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series	Length & Wattage	CCT	Finish
LED-UDL2 -		- 5CCT -	
Architectural	2FT-3P25	50/40/35	WH
Linear	4FT-3P50	30/27K	BL
	50/40/30W		Black
	8FT-3P100		
	100/80/60W		

Optional Accessories (Order Separately)

Connector	5-Wire Power Cables	Suspension Canopy Kits	Emergency Canopy Kits
UDL-J Straight Joiner	SJT-18-5-6FT-WH White 5-Wire Power Cord	UDL2-6FT-CPR-1WR-WH 6' Canopy Kit White	UDL2-6FT-CPR-1WR-WH-EMB 6' Canopy Kit White w/ EMB & 6' SJT Cord
UDL-4XJ 4-Way Joiner	SJT-18-5-6FT-BL Black 5-Wire Power Cord	UDL2-6FT-CPR-1WR-BL 6' Canopy Kit Black	UDL2-6FT-CPR-1WR-BL-EMB 6' Canopy Kit Black w/ EMB & 6' SJT Cord
UDL-4XJ-BL Black 4-Way Joiner			

C-Line: Suspended Linear w/ Uplight

5-CCT + 3-Power Selectable

SPECIFICATIONS

LUMENS/FT.	
POWER SETTING	DOWNLIGHT ONLY
LOWEST	937.5
MIDDLE	1,250
HIGHEST	1,562

2FT-3P25 MODEL													
DOWNLIGHT ONLY FIXTURE		10% DOWNLIGHT & UP LIGHT FIXTURE				15% DOWNLIGHT & UP LIGHT FIXTURE				20% DOWNLIGHT & UP LIGHT FIXTURE			
DOWNLIGHT		DOWNLIGHT		UP LIGHT		DOWNLIGHT		UP LIGHT		DOWNLIGHT		UP LIGHT	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
15	1,875	13.5	1,687	1.5	187	12.75	1594	2.25	281	12	1,500	3	375
20	2,500	18	2,250	2	250	17	2,125	3	375	16	2,000	4	500
25	3,125	22.5	2,812	2.5	312	21.25	2,656	3.75	468	20	2,500	5	625

4FT-3P50 MODEL													
DOWNLIGHT ONLY FIXTURE		10% DOWNLIGHT & UP LIGHT FIXTURE				15% DOWNLIGHT & UP LIGHT FIXTURE				20% DOWNLIGHT & UP LIGHT FIXTURE			
DOWNLIGHT		DOWNLIGHT		UP LIGHT		DOWNLIGHT		UP LIGHT		DOWNLIGHT		UP LIGHT	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
30	3,750	27	3,375	3	375	25	3,188	4.5	281	24	3,000	6	750
40	5,000	36	4,500	4	500	34	4,250	6	375	32	4,000	8	1,000
50	6,250	45	5,625	5	625	42.5	5,312	7.5	937	40	5,000	10	1,250


8FT-3P100 MODEL													
DOWNLIGHT ONLY FIXTURE		10% DOWNLIGHT & UP LIGHT FIXTURE				15% DOWNLIGHT & UP LIGHT FIXTURE				20% DOWNLIGHT & UP LIGHT FIXTURE			
DOWNLIGHT		DOWNLIGHT		UP LIGHT		DOWNLIGHT		UP LIGHT		DOWNLIGHT		UP LIGHT	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
60	7,500	54	6,750	6	750	50	6,250	9	1,125	48	6,000	12	1,500
80	10,000	72	9,000	8	1,000	68	8,500	12	750	64	8,000	16	2,000
100	12,500	90	11,250	10	1,250	85	10,625	15	1,875	80	10,000	20	2,500

Lumen based off 4000K. Other CCT: +/- 5%




C-Line: Suspended Linear w/ Uplight

5-CCT + 3-Power Selectable

FEATURES

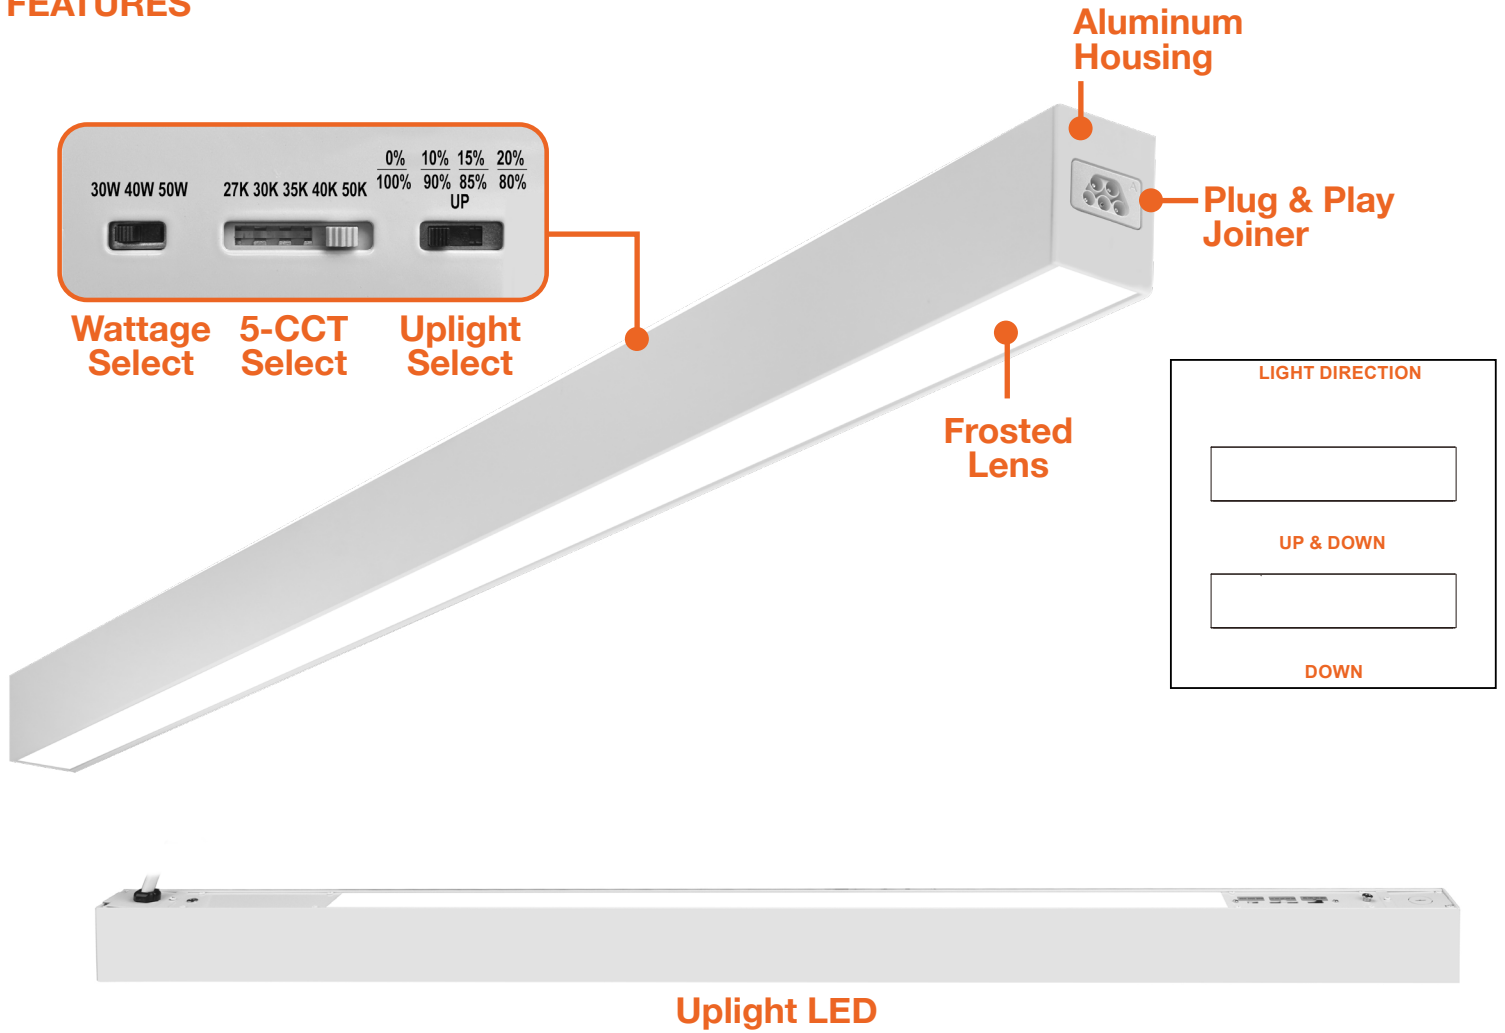

DIMENSIONS

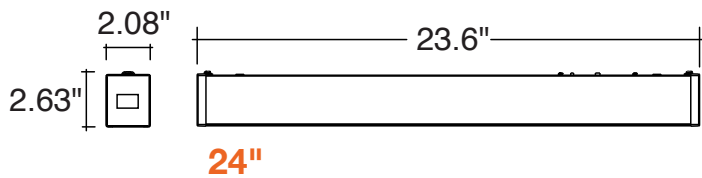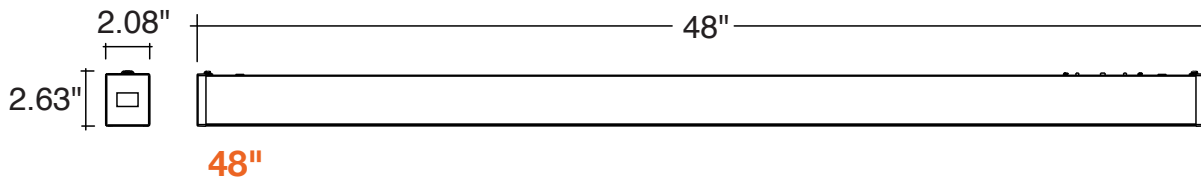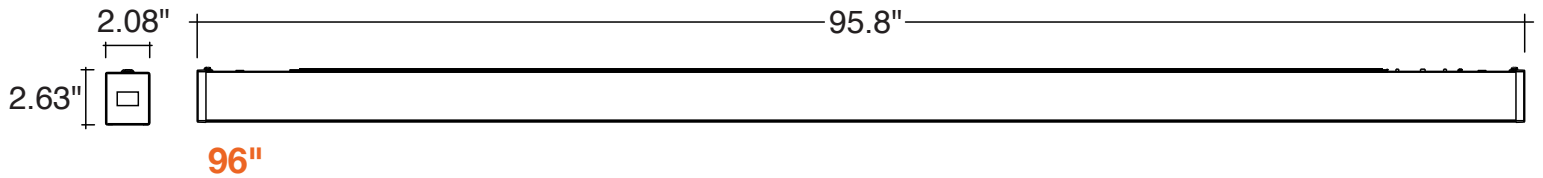


C-Line: Suspended Linear w/ Uplight


5-CCT + 3-Power Selectable



UDL-J

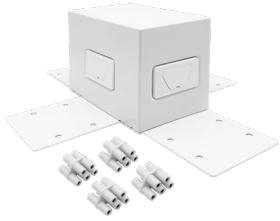

UDL-4XJ

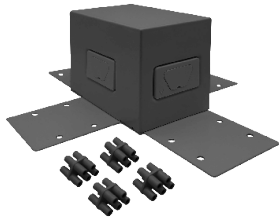


UDL-4XJ-BL



SJT-18-5-6FT-WH
SJT-18-5-6FT-BL



UDL2-6FT-CPR-1WR-WH-EMB

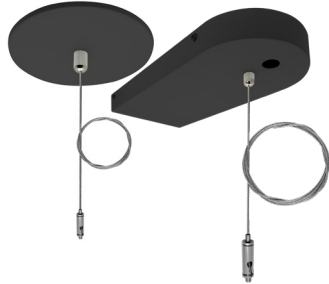

UDL2-6FT-CPR-1WR-BL-EMB



UDL2-6FT-CPR-1WR-WH



UDL2-6FT-CPR-1WR-BL

Model	Voltage	Watts	Lumens	Color
LED-UDL2-2FT-3P25-5CCT-WH	120-277V	25/20/15w	125lm/w	50/40/35/30/27k
LED-UDL2-2FT-3P25-5CCT-BL	120-277V	25/20/15w	125lm/w	50/40/35/30/27k
LED-UDL2-4FT-3P50-5CCT-WH	120-277V	50/40/30w	125lm/w	50/40/35/30/27k
LED-UDL2-4FT-3P50-5CCT-BL	120-277V	50/40/30w	125lm/w	50/40/35/30/27k
LED-UDL2-8FT-3P100-5CCT-WH	120-277V	100/80/60w	125lm/w	50/40/35/30/27k
LED-UDL2-8FT-3P100-5CCT-BL	120-277V	100/80/60w	125lm/w	50/40/35/30/27k

CONNECTOR

Accessory	Description
UDL-J	Straight Joiner
UDL-4XJ	4-Way Joiner (White)
UDL-4XJ-BL	4-Way Joiner (Black)

5-WIRE POWER CABLES

Accessory	Description
SJT-18-5-6FT-WH	6' White 5-Wire Power Cord
SJT-18-5-6FT-BL	6' Black 5-Wire Power Cord

SUSPENSION CANOPY KIT

Accessory	Description
UDL2-6FT-CPR-1WR-WH	6' Canopy Kit (White)
UDL2-6FT-CPR-1WR-BL	6' Canopy Kit (Black)

EMERGENCY CANOPY KIT

Accessory	Description
UDL2-6FT-CPR-1WR-WH-EMB	6' Canopy Kit w/ EMB & 6' SJT Cord (Black)
UDL2-6FT-CPR-1WR-BL-EMB	6' Canopy Kit w/ EMB & 6' SJT Cord (White)