



# Full-Cutoff Wall Pack: Flat-FC Line

## 3-CCT + 5-Power Selectable



### Detail Specifications

- Finish: Bronze, Black, White, Custom finishes available
- IP Rating: Wet Location
- Impact Rating: IK08
- Beam Angle: Type IV S
- Chip: SMD 2835, R9 >50, CRI >80
- 3 Step MacAdam Ellipses
- BUG:
  - 3P60: B3-U3-G2
  - 3P120: B2-U2-G1
- Operating Temperature: -40° - 122° F
- Lens: Clear acrylic with optics
- Average life (L70) of 70,000 hours

### Applications:

- Walkways & Pathways
- Parking Lots
- Hospitality, Multi-Family
- Outdoor Corridors
- Residential, Commercial and Industrial

### Product Information:

- Sturdy die-cast aluminum housing finished with corrosion free powder coat
- Full Cut-Off Dark Sky Compliant
- Photocell is included with an easy quick disconnect
- Instant-On to full brightness
- Select-n-Switch Technology: 3-CCT + 5-Power Selectable

### Driver Options:

- UNV: 120-277V 0-10V Dimmable
- HV: 277-480V 0-10V Dimmable
- Built in 6Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

### Mounting & Installation:

- Five 1/2" knockouts: 1 one each side for convenient installation

### Certifications:

- UL Listed for USA and CA
- DLC Premium Listed
- ROHS Compliant
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

WATT	LUMENS	WATT	LUMENS
20	2,900	80	11,600
30	4,350	90	13,050
40	5,800	100	14,500
50	7,250	110	15,950
60	8,700	120	17,400

Series	Finish <sup>1</sup>	Photocell - PC	Voltage	Sensor <sup>2</sup>	Emergency	Surge Protector	Optional Accessories (Order Separately)
<b>LED-WPFC-FL-5P60W-TRI</b> 20/30/40/50/60W • 30/40/50K	<b>BZ</b> Bronze (Standard)	Photocell is included. Easy quick disconnect.	<b>(blank)</b> 120-277V	<b>(blank)</b> No Sensor	<b>(blank)</b> No Emergency	<b>(blank)</b> 6KV Built in	<b>Remote for Sensors</b>
<b>LED-WPFC-FL-5P120W-TRI</b> 80/90/100/110/120W • 30/40/50K	<b>BL</b> Black <b>WH</b> White <b>GRY<sup>1</sup></b> Gray <b>CS<sup>1</sup></b> Custom Color	Easy quick disconnect. (PC-3/4-3PIN-LV)	<b>HV</b> 277-480V	<b>BMS</b> Bi-Level Motion + Daylight Sensor (S-BMS-EXT-1) <b>BMSBT</b> Bi-Level Motion + Daylight Sensor Bluetooth Control (S-BMS-EXT-1-BT)	<b>EMB</b> 90 Minute Emergency Backup 30-120F <b>CEMB</b> 90 Minute Emergency Backup Cold Weather 4-120F	<b>20KV</b> 20KV Surge Protector	<b>S-LINE-R</b> S-Line Remote


1. Standard quickship is bronze, black, & white. Other colors are custom finishes.  
 2. Sensors require remote for programming

Specs and model numbers are subject to change with or without notice.


# Full-Cutoff Wall Pack: Flat-FC Line

3-CCT + 5-Power Selectable

## FEATURES

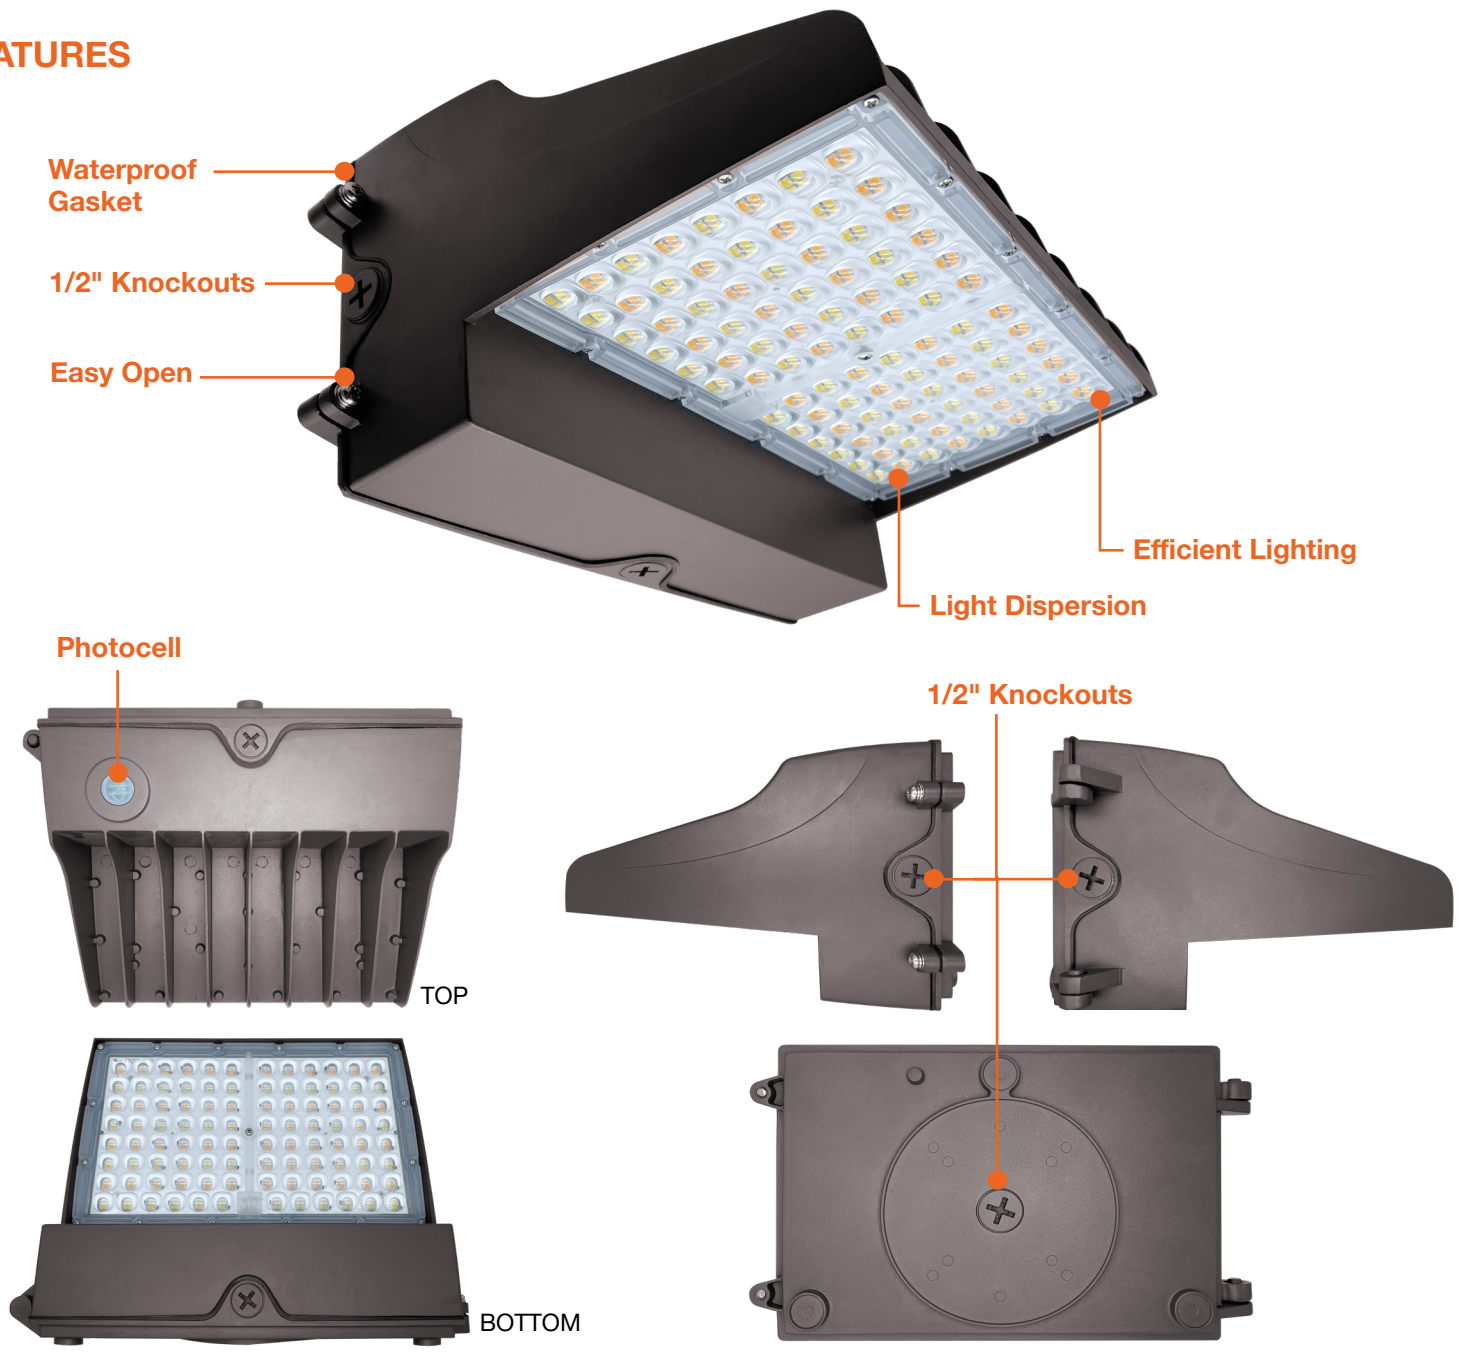

## DIMENSIONS

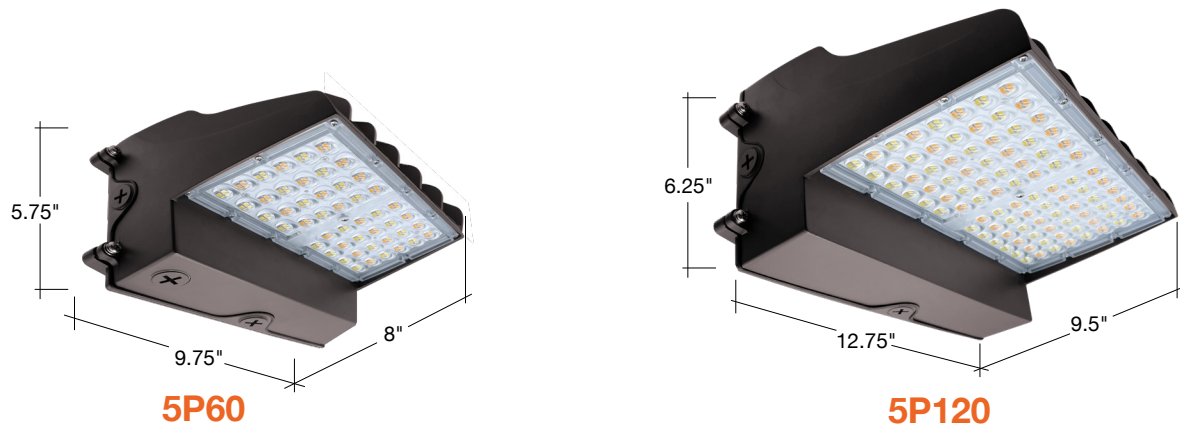

# Full-Cutoff Wall Pack: Flat-FC Line

## 3-CCT + 5-Power Selectable

### WALL PACK

Model	Voltage	Watts	Lumens	Color	CRI
LED-WPFC-FL-5P60W-TRI-BZ-PC	120-277V	20/30/40/50/60w	2900/4350/5800/7250/8700	30/40/50k	>80
LED-WPFC-FL-5P120W-TRI-BZ-PC	120-277V	80/90/100/110/120w	11600/13050/14500/15950/17400	30/40/50k	>80
LED-WPFC-FL-5P60W-TRI-BL-PC	120-277V	20/30/40/50/60w	2900/4350/5800/7250/8700	30/40/50k	>80
LED-WPFC-FL-5P120W-TRI-BL-PC	120-277V	80/90/100/110/120w	11600/13050/14500/15950/17400	30/40/50k	>80
LED-WPFC-FL-5P120W-TRI-WH-PC	120-277V	80/90/100/110/120w	11600/13050/14500/15950/17400	30/40/50k	>80
LED-WPFC-FL-5P120W-TRI-WH-PC	120-277V	80/90/100/110/120w	11600/13050/14500/15950/17400	30/40/50k	>80



**HB03R**



**S-LINE-R**



**PC-BTN-UNV-1/2"**



**S-BMS-EXT-1**  
**S-BMS-EXT-1-BT**

### REMOTE CONTROL

Accessory Model	Description
HB03R	Remote for HB-Line Series
S-LINE-R	Remote for S-LINE Series Sensors

### PHOTOCELL

Accessory Model	Description
PC-BTN-UNV-1/2"	Button Photocell Universal for 1/2" Knockout

### HB-LINE-SENSORS

Model	Item Description	Voltage	Watts
S-BMS-EXT-1	S-Line: Bi Level Motion Sensor w/ Daylight Harvesting. Ideal for use with LED WALLPACKS. 12V Aux REQD. (Remote Required)	12V	<1w
S-BMS-EXT-1-BT	S-Line: Bi Level Motion Sensor w/ Daylight Harvesting. Ideal for use with Wallpacks. 12V Aux REQD. (Remote Required)	12V	<1w

Specs and model numbers are subject to change with or without notice.