

Mini Wall Pack: M-Line - w/ Photocell 3-CCT



Detail Specifications:

- Finish: Bronze, Custom finishes available
- IP Rating: Wet Location
- Impact Rating: IK08
- Beam Angle: 100°
- BUG: B1-U3-G2
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 122° F
- Lens: Clear acrylic with optics
- Average life (L70) of 70,000 hours

Applications:

- Walkways & Pathways
- Parking Lots
- Hospitality, Multi-Family
- Outdoor Corridors
- Residential, Commercial and Industrial

Product Information:

- Sturdy die-cast aluminum housing finished with corrosion free powder coat
- Traditional metal-halide wall pack size
- Instant-On to full brightness

Driver Options:

- UNV: 120-277V 0-10V Dimmable
- Built in 6Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

Mounting & Installation:

- Three 1/2" knockouts: 1 one each side for convenient installation

Certifications:

- UL Listed for USA and CA
- DLC Listed
- ROHS Compliant
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series

LED-WPM-20W-TRI-F -

20W • 2,860 Lumens

Finish¹

- BZ**
Bronze
(Standard)
- BL**¹
Black
- WH**¹
White
- GRY**¹
Gray
- CS**¹
Custom
Color

Photocell

- PC -

- Photocell is included. Easy quick disconnect. (PC-3/4-3PIN-LV)
- (Blank)**
No Sensor
- BMS**
Bi-Level Motion + Daylight Sensor

1. Standard quickship is bronze. Other colors are custom finishes

Mini Wall Pack: M-Line - w/ Photocell 3-CCT

FEATURES

3-CCT
Selectable

Photocell Included



Aluminum Housing

Yellowing Free Lens



DIMENSIONS

Model	Voltage	Watts	Lumens	Color	CRI
LED-WPM-20W-TRI-F-BZ-PC	120-277V	20w	2,600	30/40/50k	>80

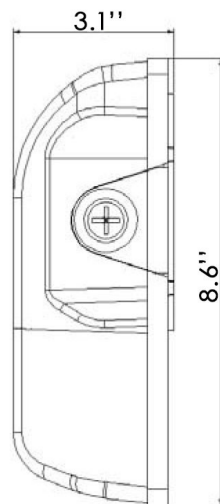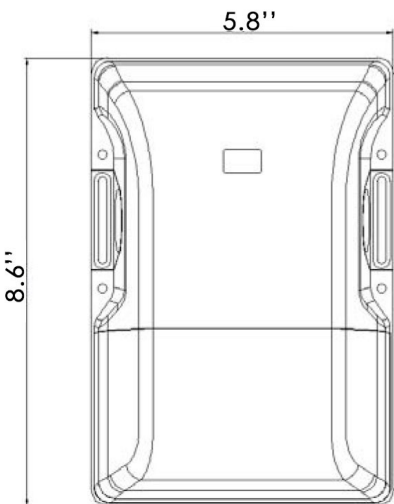

Specs and model numbers are subject to change with or without notice.