



Frosted LED Wrap



Detail Specifications:

- Finish: White, Custom finishes available
- IP Rating: Damp Location (IP44)
- Beam Angle: 130°
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 122° F
- Lens: Frosted Lens
- Average life (L70) of 50,000 hours

Applications:

- Stairwell & Hallways
- Utility & Storage
- Garage Structures
- Office and Meeting Rooms
- Shop Lighting
- Residential, Commercial and Industrial

Product Information:

- Aluminum housing finished with corrosion free powder coat
- Easy j-box access: snap on and off tool-less design
- 1/2" Knockout on both ends of the fixture

Driver Options:

- UNV: 120-277V 0-10V Dimmable
- THD: <15% (+/-5% tolerance), PF >0.9, 50/60Hz
- Flicker Free

Mounting & Installation:

- Surface mount into 30 or 40 j-box
- Optional 9' suspension kit available
- Optional 9' chain mount available

Certifications:

- ETL Listed for USA and CA
- DLC Listed
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series	CCT	Sensor	Emergency	Finish ¹	Optional Accessories (Order Separately)
LED-WRP-FR-2FT-20W 20W • 2,200lm • 120-277V	35K 3500K	(Blank) No Sensor	(Blank) No Emergency	(Blank) White	SK-9FT-ADJ-2 9' Suspension Kit CK-6FT-V 6' Chain Hanging Kit
LED-WRP-FR-4FT-48W 48W • 5,040lm • 120-277V	40K 4000K	BMS Bi-Level	EMB Emergency Backup	BL ¹ Black	
	50K 5000K	Motion + Daylight Sensor (HD-407VC-R)		GRY ¹ Gray	
				BRZ ¹ Bronze CS ¹ Custom Color	

1. Standard quick ship finish is white. Other colors are custom finishes.


Specs and model numbers are subject to change with or without notice.

Frosted LED Wrap


FEATURES





(Optional) Bi-Level Motion Sensor

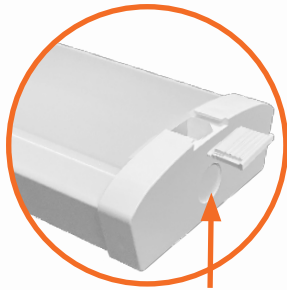


1/2" Knockout

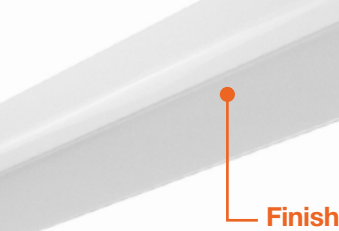


DIMENSIONS

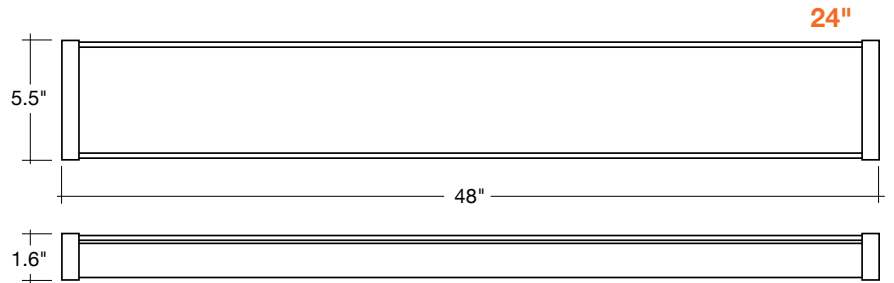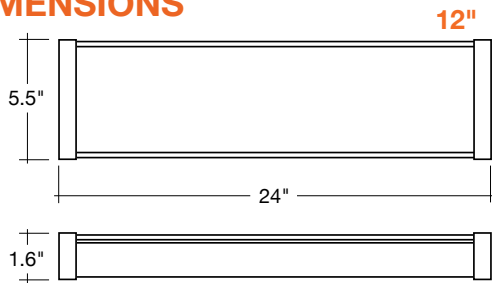

ACCESSORIES

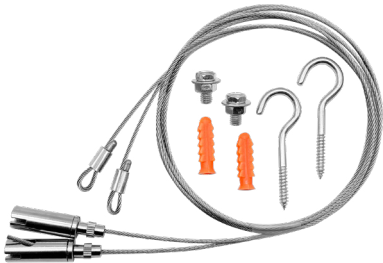

Suspension Kit
SK-9FT-ADJ-2



Hanging Kit
DAZZLING

WRAP FIXTURE

Model	Voltage	Watts	Lumens	Color	CRI
LED-WRP-FR-2FT-20W-35K	120-277V	20w	2,200	3500k	>80
LED-WRP-FR-2FT-20W-40K	120-277V	20w	2,200	4000k	>80
LED-WRP-FR-2FT-20W-50K	120-277V	20w	2,200	5000k	>80
LED-WRP-FR-4FT-48W-35K	120-277V	48w	5,040	3500k	>80
LED-WRP-FR-4FT-48W-40K	120-277V	48w	5,040	4000k	>80
LED-WRP-FR-4FT-48W-50K	120-277V	48w	5,040	5000k	>80

SUSPENSION KIT

Model	Description
SK-9FT-ADJ-2	9ft Suspension Kit Adjustable

CHAIN HANGING KIT

Model	Description
CK-6FT-V	6ft Chain Hanging Kit