Part #:

Project: Type:

> Sensors

S-CM-PIR-LV-SL allows for group level luminaire control and is equipped with both occupancy + daylight sensing. It utilizes a Bluetooth® Low Energy (BLE) mesh network. Commissioning can be set through the SILVAIR mobile app or desktop site.

- Detail Specifications: Input Voltage: 12-24V DC | 50mA Operating Temperature: -4-104F°

- Finish: White
  360° detection
  Max Bluetooth Range: 100' line of sight
- Highly dependent on surrounding environment Bluetooth test recommended for range accuracy
- IP Rating: IP20 Dry Location

## Applications:

- Commercial & Industrial
- 0-10V Dimmable Fixtures

### **Product Information:**


- · PIR motion sensor: Ideal for indoor environments with clear lines of sight to the area of interest. Detects warm objects, good for high vibration, areas of metal.
- · Daylight Sensor: controls power consumption of the fixtures based on sunlight levels
- Magnetic Reset: touch the top part of the sensor for 5 seconds
  Include parameter profiles, dimming control, real-time sensor feedback
  View our SILVAIR guide for full features


- Mounting & Installation: Snap-On: snap on ceiling design Max Mounting Height: 12ft Connect up to 3,000 devices on a zone

- Certifications: UL Listed for USA and CA DLC NLC Listed ID NSLVR23CNTRL
- Bluetooth

- Approved for CA T24
   5 Year Limited Warranty
   FCC CFR 47, GCC Part 15, Subpart B:2017

# **Ceiling Mounted Sensor x SILVAIR** Enabled

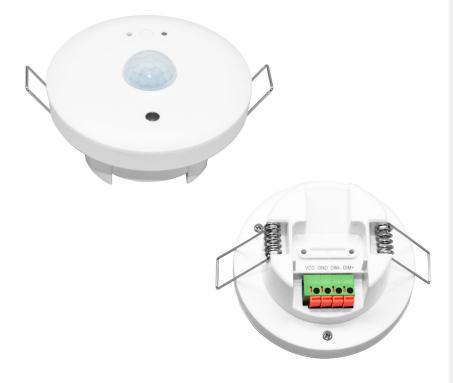

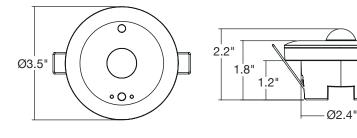

Item S-CM-PIR-LV-SL