

Wall Mounted Sensor x SILVAIR Enabled

Sensors



S-WM-PIR-CUNV-SL allows for group level luminaire control and is equipped with PIR occupancy sensing. It utilizes a Bluetooth® Low Energy (BLE) mesh network. Commissioning can be set through the SILVAIR mobile app or desktop site.

Detail Specifications:

- Input Voltage: 120-277V
- Operating Temperature: -4-104F°
- Finish: White
- 180° detection
- Max Bluetooth Range: 100' line of sight
 - Highly dependent on surrounding environment
 - Bluetooth test recommended for range accuracy
- IP Rating: IP20 Dry Location

Applications:

- Commercial & Industrial
- 0-10V Dimmable Fixtures

Product Information:


- PIR motion sensor: Ideal for indoor environments with clear lines of sight to the area of interest. Detects warm objects, good for high vibration, areas of metal.
- Magnetic Reset: touch the top part of the sensor for 5 seconds
- Include parameter profiles, dimming control, real-time sensor feedback
 - View our SILVAIR guide for full features

Mounting & Installation:

- Single-gang wall box
- 30ft @ 4ft mounting height
- Connect up to 3,000 devices on a zone

Certifications:

- UL Listed for USA and CA
- DLC NLC Listed ID NSLVR23CNTRL
- Bluetooth
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

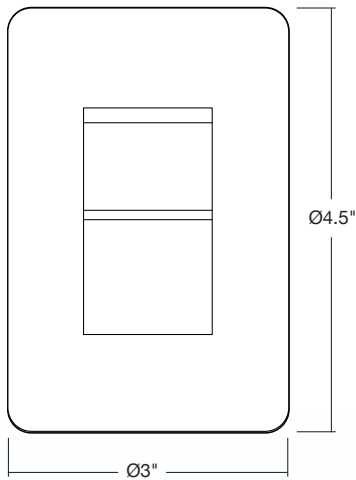

Item

S-WM-PIR-CUNV-SL