

## EXT SnapTrim Downlight

### 3 CCT Selectable: 30/40/50K

EnVision LED has developed a line of super slim LED downlights that eliminate the need for a can. The external remote junction box mounts inside the ceiling and the fixture is IC Rated. EnVisions EXT SnapTrim downlights feature three interchangeable trims, including black, bronze, and brushed nickel. By reducing material cost and installation time, the EnVision SnapTrim is the ideal retrofit or new construction recessed lighting solution yet. Simply cut a hole in the ceiling, power the J-Box to the wall switch, and “snap” the trim flush.

#### Applications:

- Retrofitting
- New Construction
- Residential Lighting
- Commercial Lighting

#### Product Information:

- External j-box & spring mount clips for easy installation
- ‘-TRI’ version toggles between 3000k, 4000k, & 5000k
- Compatible with most dimmers (e.g. Lutron DVCL-153P)
- Spring mount clips make installation easy
- Canless module does not require housing
- IP65 Wet Location Rated



4-6" Round



4-6" Square



6" / 8" Round  
 10" only available in 0/10V

**LED - SL - PNL** - Size/Shape/Watts - **TRI** - Driver - Trims\* - Control - EMB - Warranty

1 Product	2 Size/Shape/Watts	3 Color	4 Driver	5 Trims*	6 Control	7 EMB	8 Warranty
LED-SL-PNL Non-Adjustable	<b>4R-11W</b> 4" Round, 11W (750lm) <b>4SQ-11W</b> 4" Square, 11W (750lm) <b>6R-14W</b> 6" Round, 14W (1000lm) <b>6SQ-14W</b> 6" Square, 14W (1000lm) <b>8R-18W</b> 8" Round, 18W (1200lm) <b>10R-22W</b> 10" Round, 22W (1600lm)	TRI Variable 30K / 40K / 50K	(Blank) 120V 0/10V 0-10V Dim (120V-277V)	<b>WHT</b> White (incl.) <b>BLK</b> Black <b>BZ</b> Bronze <b>BN</b> Brushed Nickel	(Blank) None SWF Wi-Fi Controller	(Blank) None EMB Emergency Backup	(Blank) 5 Year 10YR (incl.)


\*Trims only available for 4" and 6" fixtures

Specs and model numbers are subject to change with or without notice



# EXT SnapTrim Downlight

## FEATURES

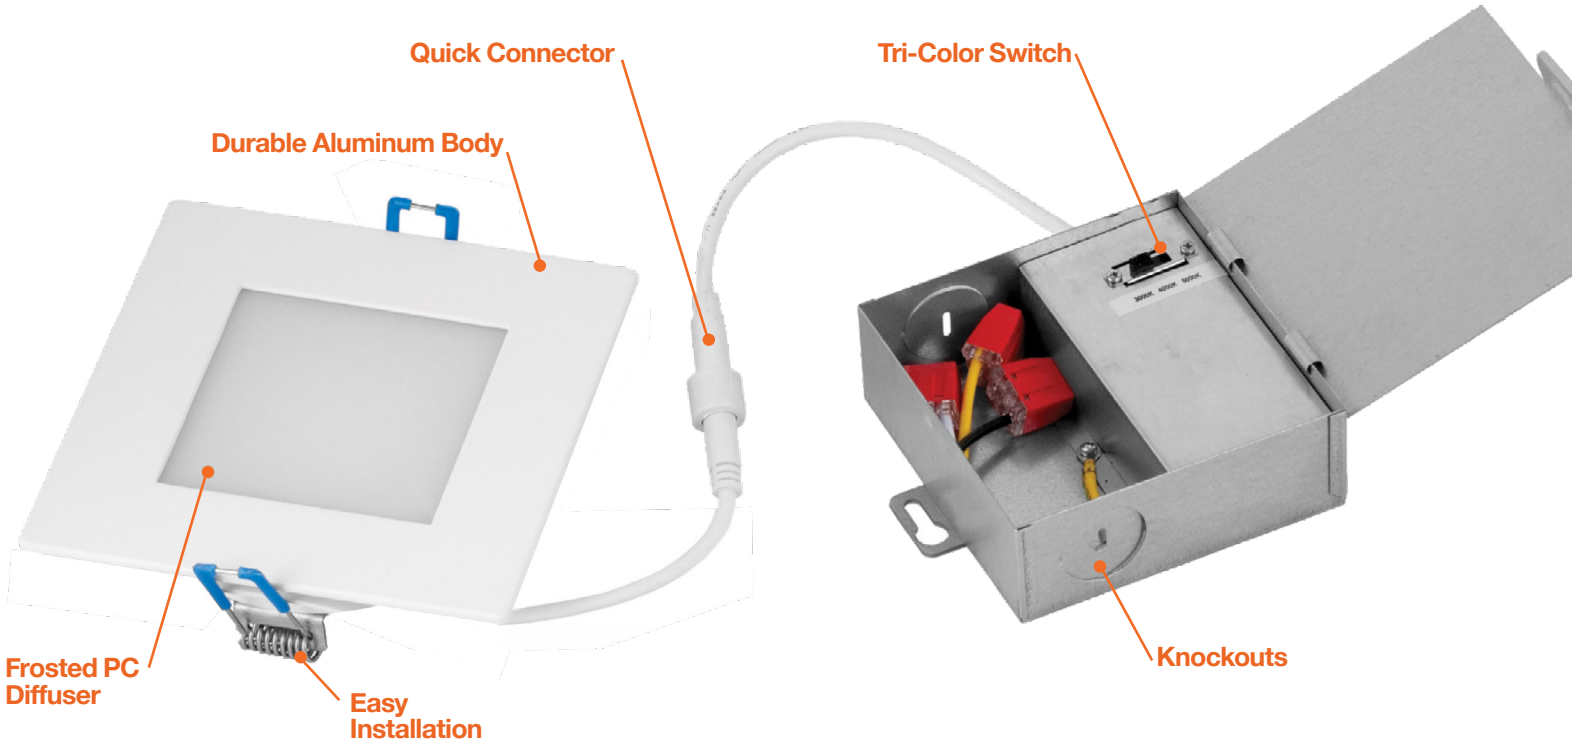


## INSTALLATION

The slim panel LED redefines recessed downlight installations. The narrow design and remote driver box with the panel LED can be installed in confined, hard to reach spaces such as closets, bathrooms, hallways, stairwells, outside soffits and other areas that would have been nearly impossible with traditional recessed housings.

Make installation quick and simple with EXT SnapTrim series

Traditional recessed downlight

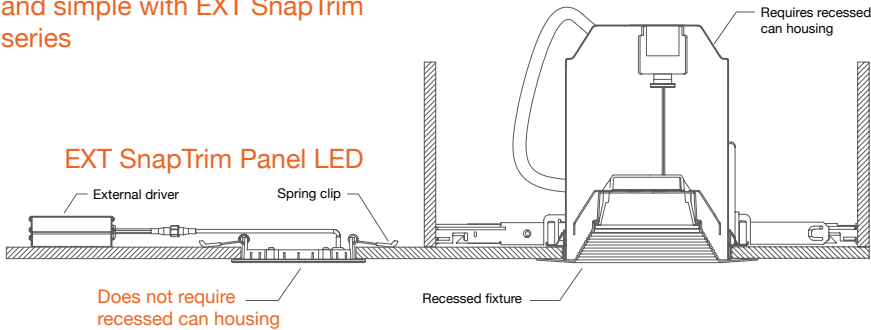


DIMMER COMPATIBILITY				
Brand	Series	Model	Load	Dimmability
Lutron	Ariadni	AYCL-153P	150W	OK
	Diva	DV-600PR	600W	OK
	Diva	DVCL-153P	150W	OK
	Maestro	MACL-153MH	600W	OK
	Maestro Wireless	MRF2-6CL	150W	OK
	Rotary	D-600P	600W	OK
	Electronic(ELV)	NTElv-300P	600W	OK
	Skylark	S-600P	600W	OK
	Skylark Contour	CT-600P	600W	OK
	Skylark Contour	CTCL-153P	150W	OK
Leviton	Toggler	TG-600P	600W	OK
	Toggler	TGCL-153P	150W	OK
	Sureslide	6633	600W	OK
	Sureslide Decora	6674	600W	OK
Legrand	Trimatron	6672	600W	OK
	Sureslide	6613	600W	OK
Cooper	Adorne	DLV703	700W	OK
	Harmony	H703PTW	700W	OK
Cooper	Aspire	9530	1000W	OK
	Devine	DAL03P	300W	OK

# EXT SnapTrim Downlight


## DIMENSIONS

### 4" Round

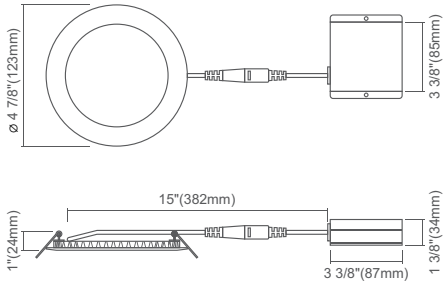


Cut Out: Ø4 1/4" (108mm)

### 4" Square

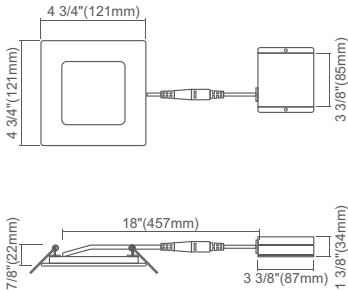


Cut Out: Ø4 1/4" (108mm)

### 6" Round

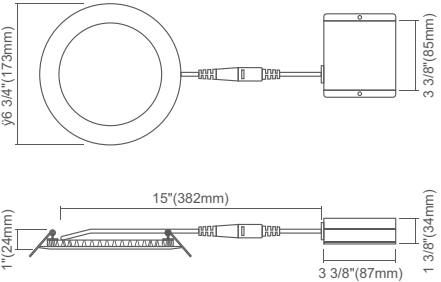


Cut Out: Ø6 1/4" (158mm)

### 6" Square

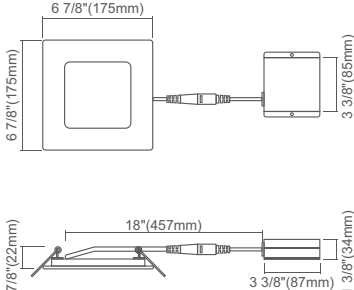


Cut Out: Ø6 1/4" (158mm)

### 8" Round

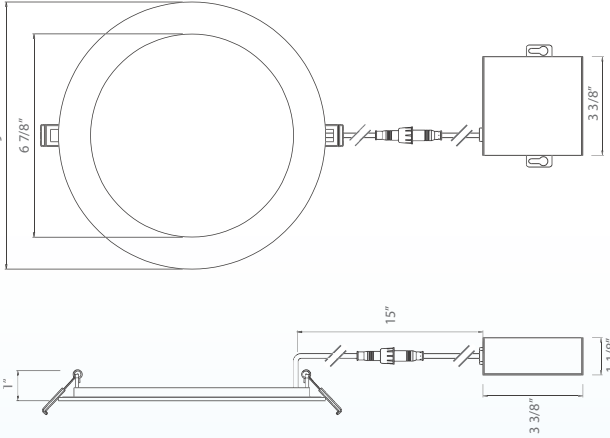


### 10" Round

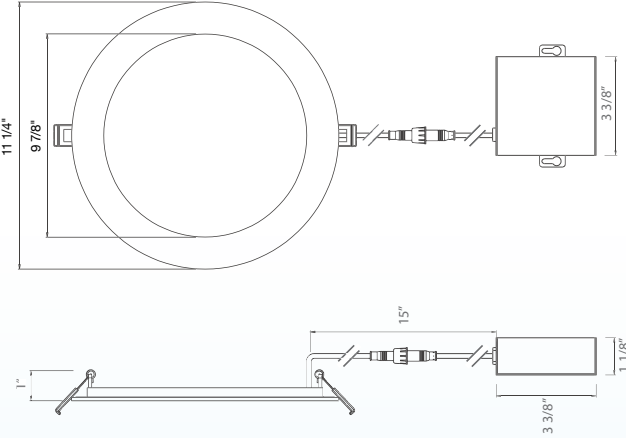

HOLE CUT SIZE	
4 inch round, 4 inch square	Ø4-1/4" (108mm)
6 inch round, 6 inch square	Ø6-1/4" (158mm)
8 inch round	Ø8-1/4" (210mm)
10 inch round	Ø11" (280mm)

# EXT SnapTrim Downlight

## CLIP-ON TRIMS

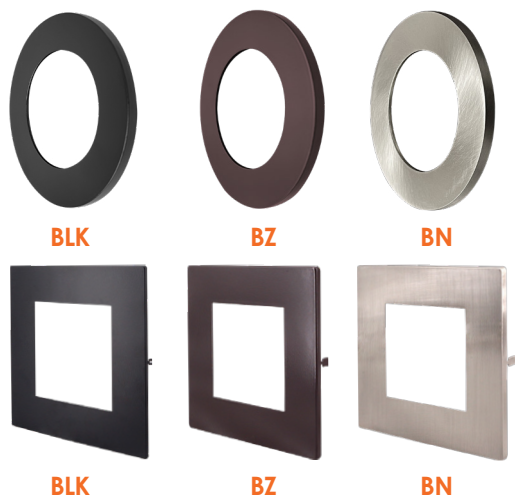

## FIXTURE, TRIM, & ACCESSORY REFERENCE


Fixture Model	Voltage	Watts	Lumens	Color	CRI
LED-SL-PNL-4R-11W-TRI	120V	11w	600	Variable	>90
LED-SL-PNL-4SQ-11W-TRI	120V	11w	600	Variable	>90
LED-SL-PNL-4R-11W-TRI-0/10V	120/277v	11w	600	Variable	>90
LED-SL-PNL-4SQ-11W-TRI-0/10V	120/277v	11w	600	Variable	>90
LED-SL-PNL-6R-14W-TRI	120V	14w	950	Variable	>90
LED-SL-PNL-6SQ-14W-TRI	120V	14w	950	Variable	>90
LED-SL-PNL-6R-14W-TRI-0/10V	120/277v	14w	1,000	Variable	>90
LED-SL-PNL-6SQ-14W-TRI-0/10V	120/277v	14w	1,000	Variable	>90
LED-SL-PNL-8R-18W-TRI	120V	18w	1,200	Variable	>90
LED-SL-PNL-8R-18W-TRI-0/10V	120/277v	18w	1,200	Variable	>90
LED-SL-PNL-10R-22W-TRI-0/10V	120/277v	22w	1,600	Variable	>90

## ACCESSORIES




**JBX-EXT**  
Extension Cable (6'/10')


J-Box



**CUNV-NC-ICAT**  
Universal  
Pre-Mounting Plate  
5 3/10" x 14 1/2"

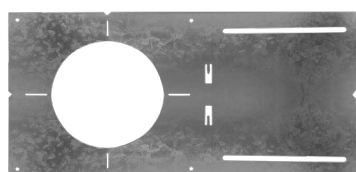

**C4-JBX-RI**  
4" Rough In Plate  
6 1/2" x 13 1/4"



**C6-JBX-RI**  
6" Rough In Plate  
8 1/2" x 17 1/4"



**C8-JBX-RI**  
8" Rough In Plate  
10 1/2" x 26"



LED-EMB-25W-HV-0/10V

Trim Model	Description
SL-PNL-4R-TRIM-BLK	4" Round Black Finish Trim
SL-PNL-4R-TRIM-BZ	4" Round Bronze Finish Trim
SL-PNL-4R-TRIM-BN	4" Round Brushed Nickel Trim
SL-PNL-4SQ-TRIM-BLK	4" Square Black Finish Trim
SL-PNL-4SQ-TRIM-BZ	4" Square Bronze Finish Trim
SL-PNL-4SQ-TRIM-BN	4" Square Brushed Nickel Trim
SL-PNL-6R-TRIM-BLK	6" Round Black Finish Trim
SL-PNL-6R-TRIM-BZ	6" Round Bronze Finish Trim
SL-PNL-6R-TRIM-BN	6" Round Brushed Nickel Trim
SL-PNL-6SQ-TRIM-BLK	6" Square Black Finish Trim
SL-PNL-6SQ-TRIM-BZ	6" Square Bronze Finish Trim
SL-PNL-6SQ-TRIM-BN	6" Square Brushed Nickel Trim
SL-PNL-8R-TRIM-BLK	8" Round Black Finish Trim
SL-PNL-8R-TRIM-BZ	8" Round Bronze Finish Trim
SL-PNL-8R-TRIM-BN	8" Round Brushed Nickel Trim

Accessory Model	Description
JBX-EXT-6'	6' J-Box Connector Extension Cable
JBX-EXT-10'	10' J-Box Connector Extension Cable
JBX-11W-277-347V	200-347V Driver for 11W Fixture (4")
JBX-14W-277-347V	200-347V Driver for 14W Fixture (6")
JBX-18W-277-347V	200-347V Driver for 18W Fixture (8")
C4-JBX-RI	4" Rough-In Plate (6 1/2" x 13 1/4")
C6-JBX-RI	6" Rough-In Plate (8 1/2" x 17 1/4")
C8-JBX-RI	8" Rough-In Plate (10 1/2" x 26")
CUNV-NC-ICAT	2/3/4/6" Pre-Mounting Plate