

Photocell Receptacle

NEMA 3P



The EnvisionLED photocell receptacle is compatible with fixtures intended to accept a twist-lock photocell.

Detail Specifications:

- Wet location rated (Photocell or shorting cap must be installed)
 - Do not leave receptacle exposed in any application
- Operating Temperature: -40° - 158° F
- Max Load: 15A
- Voltage Range: 0-480V
- RF: 50/60Hz

Applications:

- Outdoor lighting fixtures
- Retrofit onto existing fixtures

Product Information:

- Receptacle for photocell
- 6" wire length
- Lead: AWG: 14

Mounting & Installation:

- Includes silicone gasket for waterproofing

Certifications:

- cRUUS for components
- ANSI C136.10-2010



Series


PC-TWL-RC

Photocell Receptacle

NEMA 3P

INSTALLATION

Disconnect power, wire the receptacle according to the diagram below.

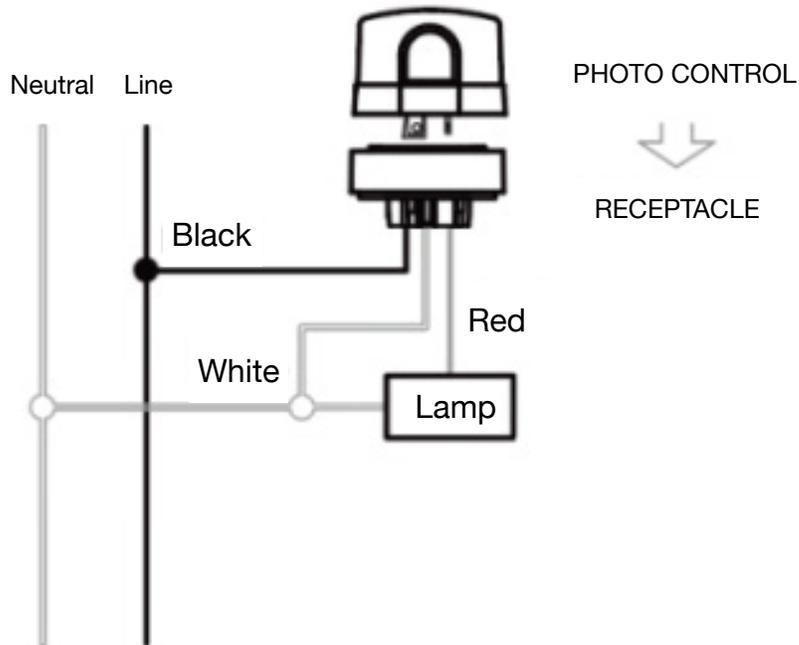

An arrow indicating NORTH on the top of the receptacle is used to assist correct direction. Adjust the receptacle position if possible, when the fixture is installed in field.

DIMENSIONS

