


Canless Downlights

3" LED Adjustable Downlight: SnapTrim-Line

Canless Series



8W



12W



18° Tilt 360° Rotation
8W



15° Tilt 360° Rotation
12W

Detail Specifications:

- Finish: White, Black, Custom
- IP54 Wet Location Rated
- Beam Angle: 38° standard, other options available
- Chip: COB Chip, R9 >50, CRI >90
- 3 Step MacAdam Ellipses
- Operating Temperature: -40° - 114° F
- Lens: Clear, non-yellowing
- Average life (L70) of 50,000 hours

Applications:

- General Recessed Lighting
- Residential & Multifamily
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality

Product Information:

- 5-CCT Selectable: 27/30/35/40/50K or warm dimming 30 to 18K
- Various sizes, finishes, and trims available
- Standard white round trim included: optional trims available
- Metal housing and trim for better heat dissipation
- Optional emergency backup available: delivers full lumens in EM mode up to 25W
- SnapTrim Canless: Spring clips with remote j-box eliminates can

Driver Options:

- 120V Triac Dimmable
- Built in 2.5Kv Surge Protector
- Flicker Free

Mounting & Installation:

- Cut Out Dimension: Ø2-15/16"
- Optional new construction plate available
- This fixture does not fit into a recessed can
- No housing needed in remodel applications, tension clips mount into 1/2" to 1.5" thick ceiling
- Can be removed from below the ceiling for service or replacement
- Pre-wired junction box with circuit wiring built in (3 in/ 3 out)

Certifications:

- ETL Listed for USA and CA
- Energy Star Certified
- CA Title 24 JA8-2022 CEC Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017
- IC Rated and ASTM-E283 Air-Tight


5-CCT	27/30/35/40/50K
3WD	30-18K Warm Dimming

Series	Beam Angle	Emergency
LED-DLJBX-ADJ-3-8W-5CCT-WH-R	(Blank)	(Blank)
8W 600LM White Round Trim	38° Degree	No Emergency Backup
LED-DLJBX-ADJ-3-8W-5CCT-BLK-R	24D	EMB
8W 600LM Black Round Trim	24° Degree	Emergency Backup
LED-DLJBX-ADJ-3-12W-5CCT-WH-R	60D	
12W 1,000LM White Round Trim	60° Degree	
LED-DLJBX-ADJ-3-12W-5CCT-BLK-R		
12W 1,000LM Black Round Trim		
LED-DLJBX-ADJ-3-6W-3WD-WH-R		
6W 450LM White Round Trim		
LED-DLJBX-ADJ-3-6W-3WD-BLK-R		
6W 450LM Black Round Trim		


Optional Accessories (Order Separately)			
Trim Options	New Construction Plates	Extension Cables	Emergency Backup ¹ (field install)
DLJBX-ADJ-3-TRIM-WH-SQ White Square Trim	CUNV-NC-ICAT-7H Universal Plate	JBX-EXT-6'-TRI 6' Extension	LED-EMB-25W-HV -0/10V-2P Up to 24W fixtures
DLJBX-ADJ-3-TRIM-BLK-SQ Black Square Trim	CUNV-JBX-RI-XL Universal Rough In Plate Extra Long	JBX-EXT-10'-TRI 10' Extension	OPTIC-42X14-24D 24 Degree Field Install Lens
DLJBX-ADJ-3-TRIM-BN-R Brushed Nickel Round Trim		JBX-EXT-12'-TRI 12' Extension	OPTIC-42X14-60D 60 Degree Field Install Lens
DLJBX-ADJ-3-TRIM-BN-SQ Brushed Nickel Square Trim			

3" LED Adjustable Downlight: SnapTrim-Line Canless Series

FEATURES

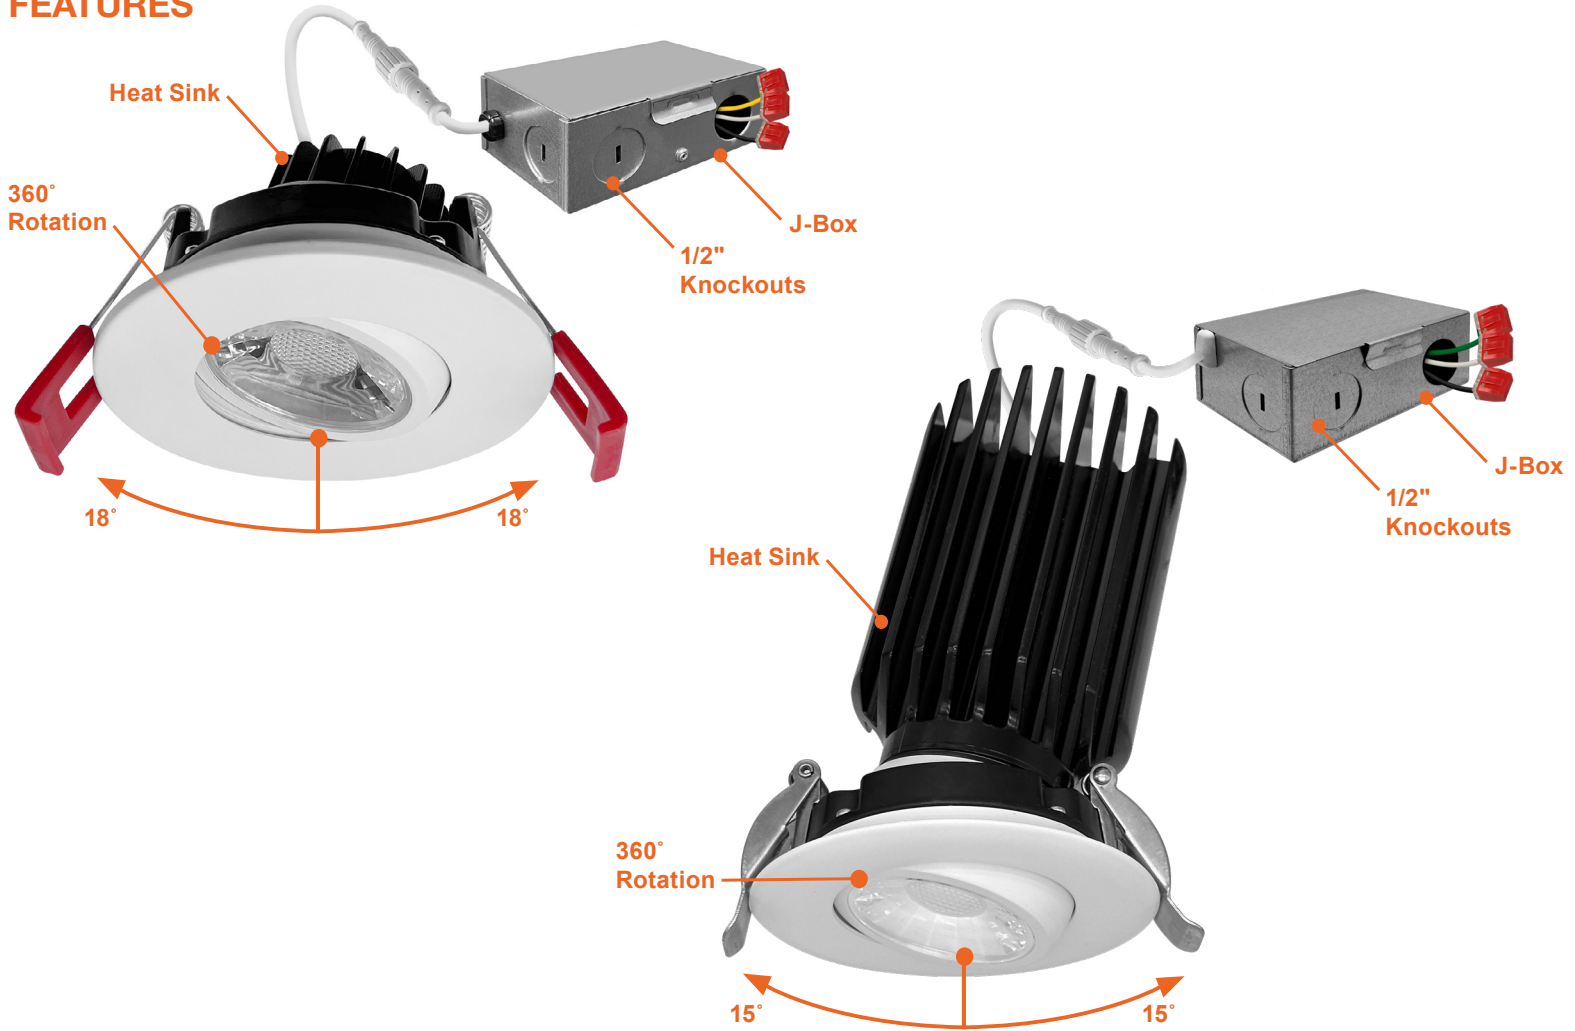

DIMENSIONS

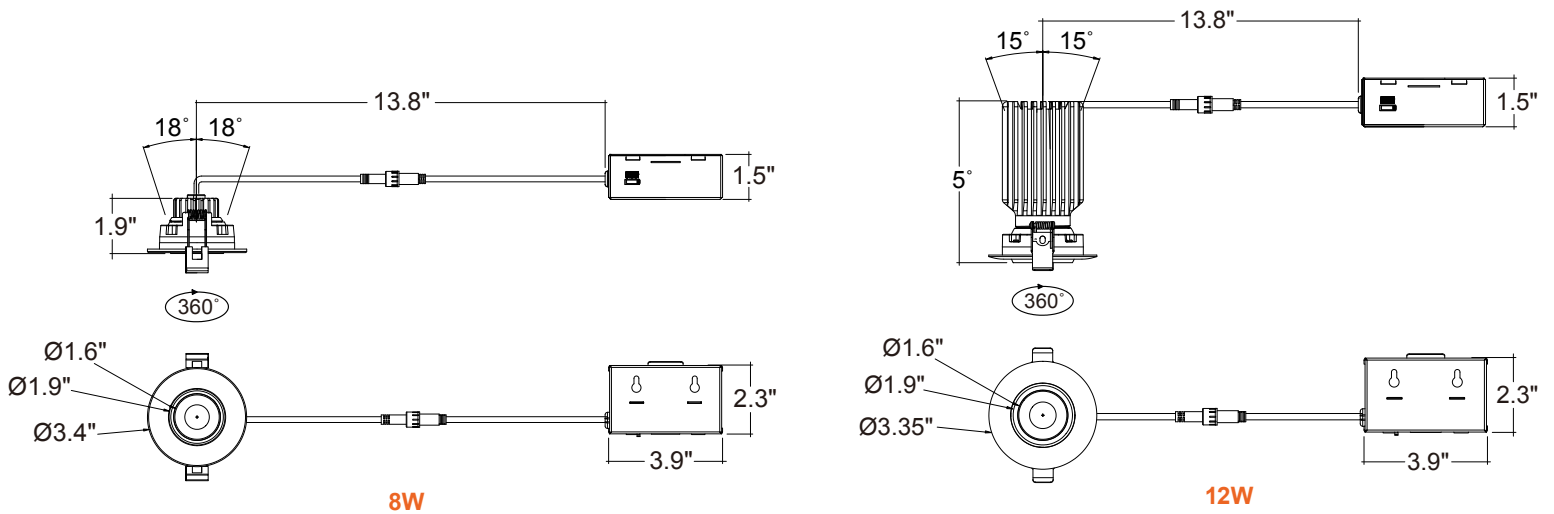


Specs and model numbers are subject to change with or without notice.

3" LED Adjustable Downlight: SnapTrim-Line Canless Series

ACCESSORIES



White (-WH-SQ)




Black (-BLK-SQ)




Nickel (-BN-R)



Nickel (-BN-SQ)



CUNV-NC-ICAT-7H
Universal Pre-Mounting Plate
13 7/8" x 15 1/8"

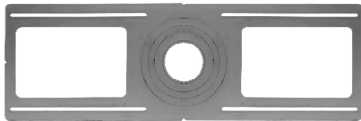

CUNV-JBX-RI-XL
7" x 26"



JBX-EXT
6' / 10' / 12' Extension Cable



LED-EMB-25W-HV-0/10V-2P



OPTIC-42X14-24D
OPTIC-42X14-60D

Model	Voltage	Watts	Lumens	Color	CRI
LED-DLJBX-ADJ-3-8W-5CCT-WH-R	120V	8w	600	27/30/35/40/50K	>90
LED-DLJBX-ADJ-3-8W-5CCT-BLK-R	120V	8w	600	27/30/35/40/50K	>90
LED-DLJBX-ADJ-3-12W-5CCT-WH-R	120V	12w	1000	27/30/35/40/50K	>90
LED-DLJBX-ADJ-3-12W-5CCT-BLK-R	120V	12w	1000	27/30/35/40/50K	>90
LED-DLJBX-ADJ-3-6W-3WD-WH-R	120V	6w	450	30-->18k	>90
LED-DLJBX-ADJ-3-6W-3WD-BLK-R	120V	6w	450	30-->18k	>90

TRIMS

Accessory	Description
DLJBX-ADJ-3-TRIM-WH-SQ	3" Gimbal Square Trim White Finish
DLJBX-ADJ-3-TRIM-BN-R	3" Gimbal Round Trim Brushed Nickel
DLJBX-ADJ-3-TRIM-BN-SQ	3" Gimbal Square Trim Brushed Nickel
DLJBX-ADJ-3-TRIM-BLK-SQ	3" Gimbal Square Trim Black Finish

CONSTRUCTION PLATES

Accessory	Description
CUNV-NC-ICAT-7H	1" 2"3" 3.5" 4" 5" 6" Universal Pre-Mounting New Construction Plate
CUNV-JBX-RI-XL	Universal tough in plate (Extra Long)

EXTENSION CABLE

Accessory	Description
JBX-EXT-6'-TRI	6" Extension Cable
JBX-EXT-10'-TRI	10" Extension Cable
JBX-EXT-12'-TRI	12" Extension Cable

EMERGENCY BACKUP

Accessory	Description
LED-EMB-25W-HV-0/10V-2P	Up to 24W fixtures

OPTICS

Accessory	Description
OPTIC-42X14-24D	24 Degree Field Install Lens
OPTIC-42X14-60D	60 Degree Field Install Lens

TESTED COMPATIBLE DIMMERS

Other dimmers may be compatible but have not been tested. Please contact us for more information.

TRIAC/ELV Dimmers

Lutron	Leviton	Legrand	Cooper
AYCL-153P	6633	ADTP703TU	9540
DV-600PR	6674	H703PTW	DAL06P
DVCL-153P	6602		
MACL-153MH	IPL06		
MRF2-6CL			
D-600P			
NTELV-300P			
S-600P			
CT-600P			
CTCL-153P			
TG-600P			
TCCL-153P			